



123456789


F

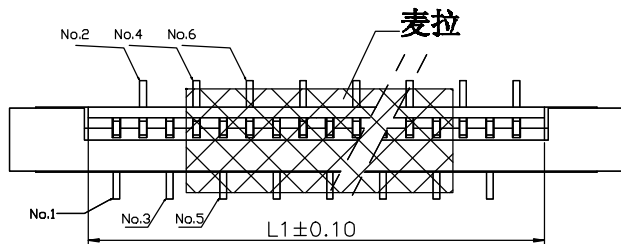


E

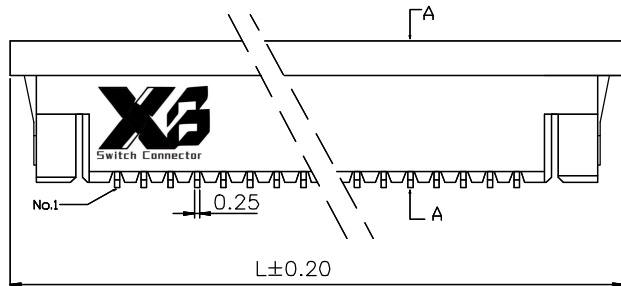

D


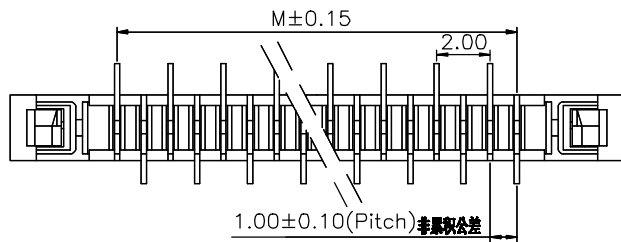


C

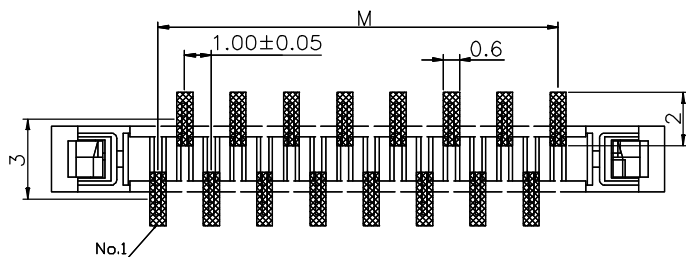


B

适用线路板
RECOMMENDED PCB LAYOUT



Specifications
Current Rating:1.0AMPS
Operating Voltage:125V AC DC
Dielectric Withstanding Voltage:
500VAC/Minute
Contact Resistance:30mΩ Max.
Insulation Resistance:500MΩ Min.
Operating Temperature:-25°C to +85°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
All materials must meet XI BANG
hazardous substances control standards.

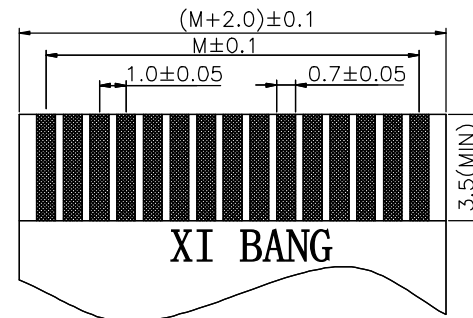

适用FPC寸法
APPLICABLE FPC




Table:

No. of PINS	Dimension Information			No. of PINS	Dimension Information		
	M	L1	L		M	L1	L
4	3.0	5.06	11.0	23	22.0	24.06	30.0
5	4.0	6.06	12.0	24	23.0	25.06	31.0
6	5.0	7.06	13.0	25	24.0	26.06	32.0
7	6.0	8.06	14.0	26	25.0	27.06	33.0
8	7.0	9.06	15.0	27	26.0	28.06	34.0
9	8.0	10.06	16.0	28	27.0	29.06	35.0
10	9.0	11.06	17.0	29	28.0	30.06	36.0
11	10.0	12.06	18.0	30	29.0	31.06	37.0
12	11.0	13.06	19.0	31	30.0	32.06	38.0
13	12.0	14.06	20.0	32	31.0	33.06	39.0
14	13.0	15.06	21.0	33	32.0	34.06	40.0
15	14.0	16.06	22.0	34	33.0	35.06	41.0
16	15.0	17.06	23.0	35	34.0	36.06	42.0
17	16.0	18.06	24.0	36	35.0	37.06	43.0
18	17.0	19.06	25.0	37	36.0	38.06	44.0
19	18.0	20.06	26.0	38	37.0	39.06	45.0
20	19.0	21.06	27.0	39	38.0	40.06	46.0
21	20.0	22.06	28.0	40	39.0	41.06	47.0
22	21.0	23.06	29.0				

Ordering Information

107-XX XX A 006 C X A X
No. of Pins per Row 04~40 Standard Plating 01=Tin Selective Plating 02=Gold Flash Color 2=White Standard Packing H=Mylar+Tape&Reel

A

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.±/	X.±0.30
.X'±/	.X±0.25
.XX'±/	.XX±0.15
.XXX'±/	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-FPC-10-107-A006
PART NO.

TITLE.
Pitch 1.00 FPC Connector

REV. 01 UNIT. mm SCALE. 1:1

123456789