
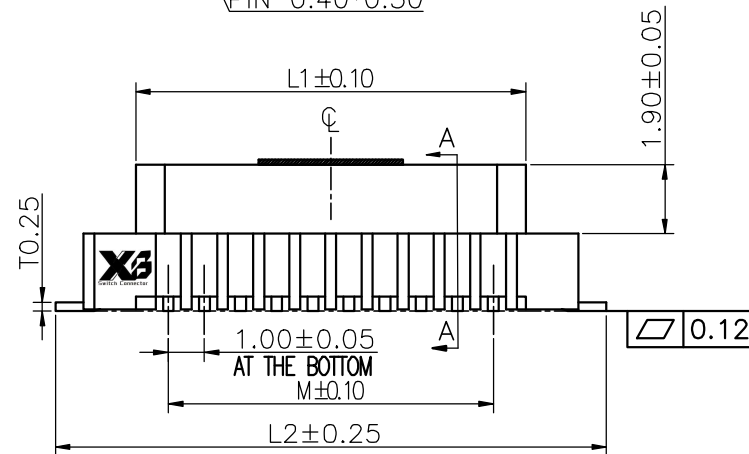


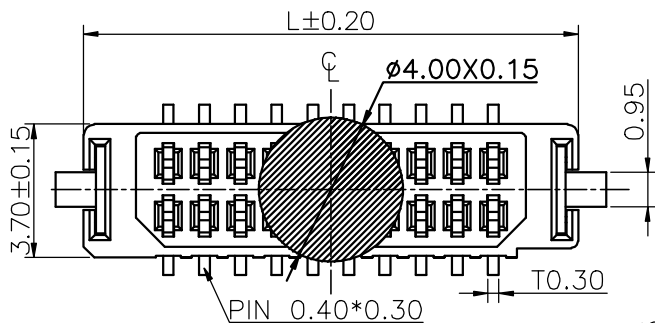

Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet XI BANG
 hazardous substances control standards.

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

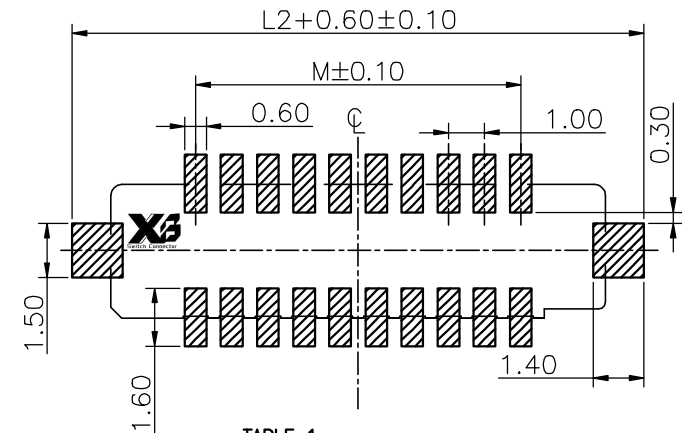
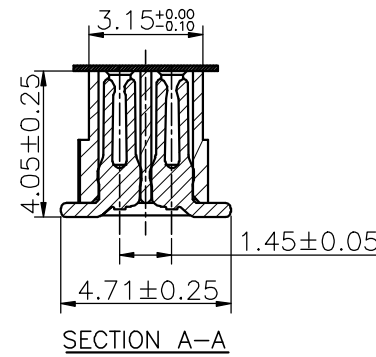


TABLE 1:

No. of PIN/ROW	Dimension Information			
	M	L1	L	L2
03	2.00	3.80	6.70	8.25
04	3.00	4.80	7.70	9.25
05	4.00	5.80	8.70	10.25
06	5.00	6.80	9.70	11.25
07	6.00	7.80	10.70	12.25
08	7.00	8.80	11.70	13.25
09	8.00	9.80	12.70	14.25
10	9.00	10.80	13.70	15.25
11	10.00	11.80	14.70	16.25
12	11.00	12.80	15.70	17.25
13	12.00	13.80	16.70	18.25
14	13.00	14.80	17.70	19.25
15	14.00	15.80	18.70	20.25

Ordering Information

XB-X-10-M-201 - XX XX A XXX C

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 03~15

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 C=LCP

1 A X

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze

Packing code
 C=Tube
 D=Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.		TITLE. 1.00 PITCH FEMALE BOARD TO BOARD SMT TYPE	
					X.'±5.0'		X.±0.30	CHECKED:	DATE:	XB-X-10-M-201		
					.X'±3.0'		.X±0.25	CO SIGEND:	DATE:	PART NO.		
					.XX'±2.0'		.XX±0.15	APPROVED:	DATE:			
					.XXX'±1.0'		.XXX±0.10					
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1									

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1