



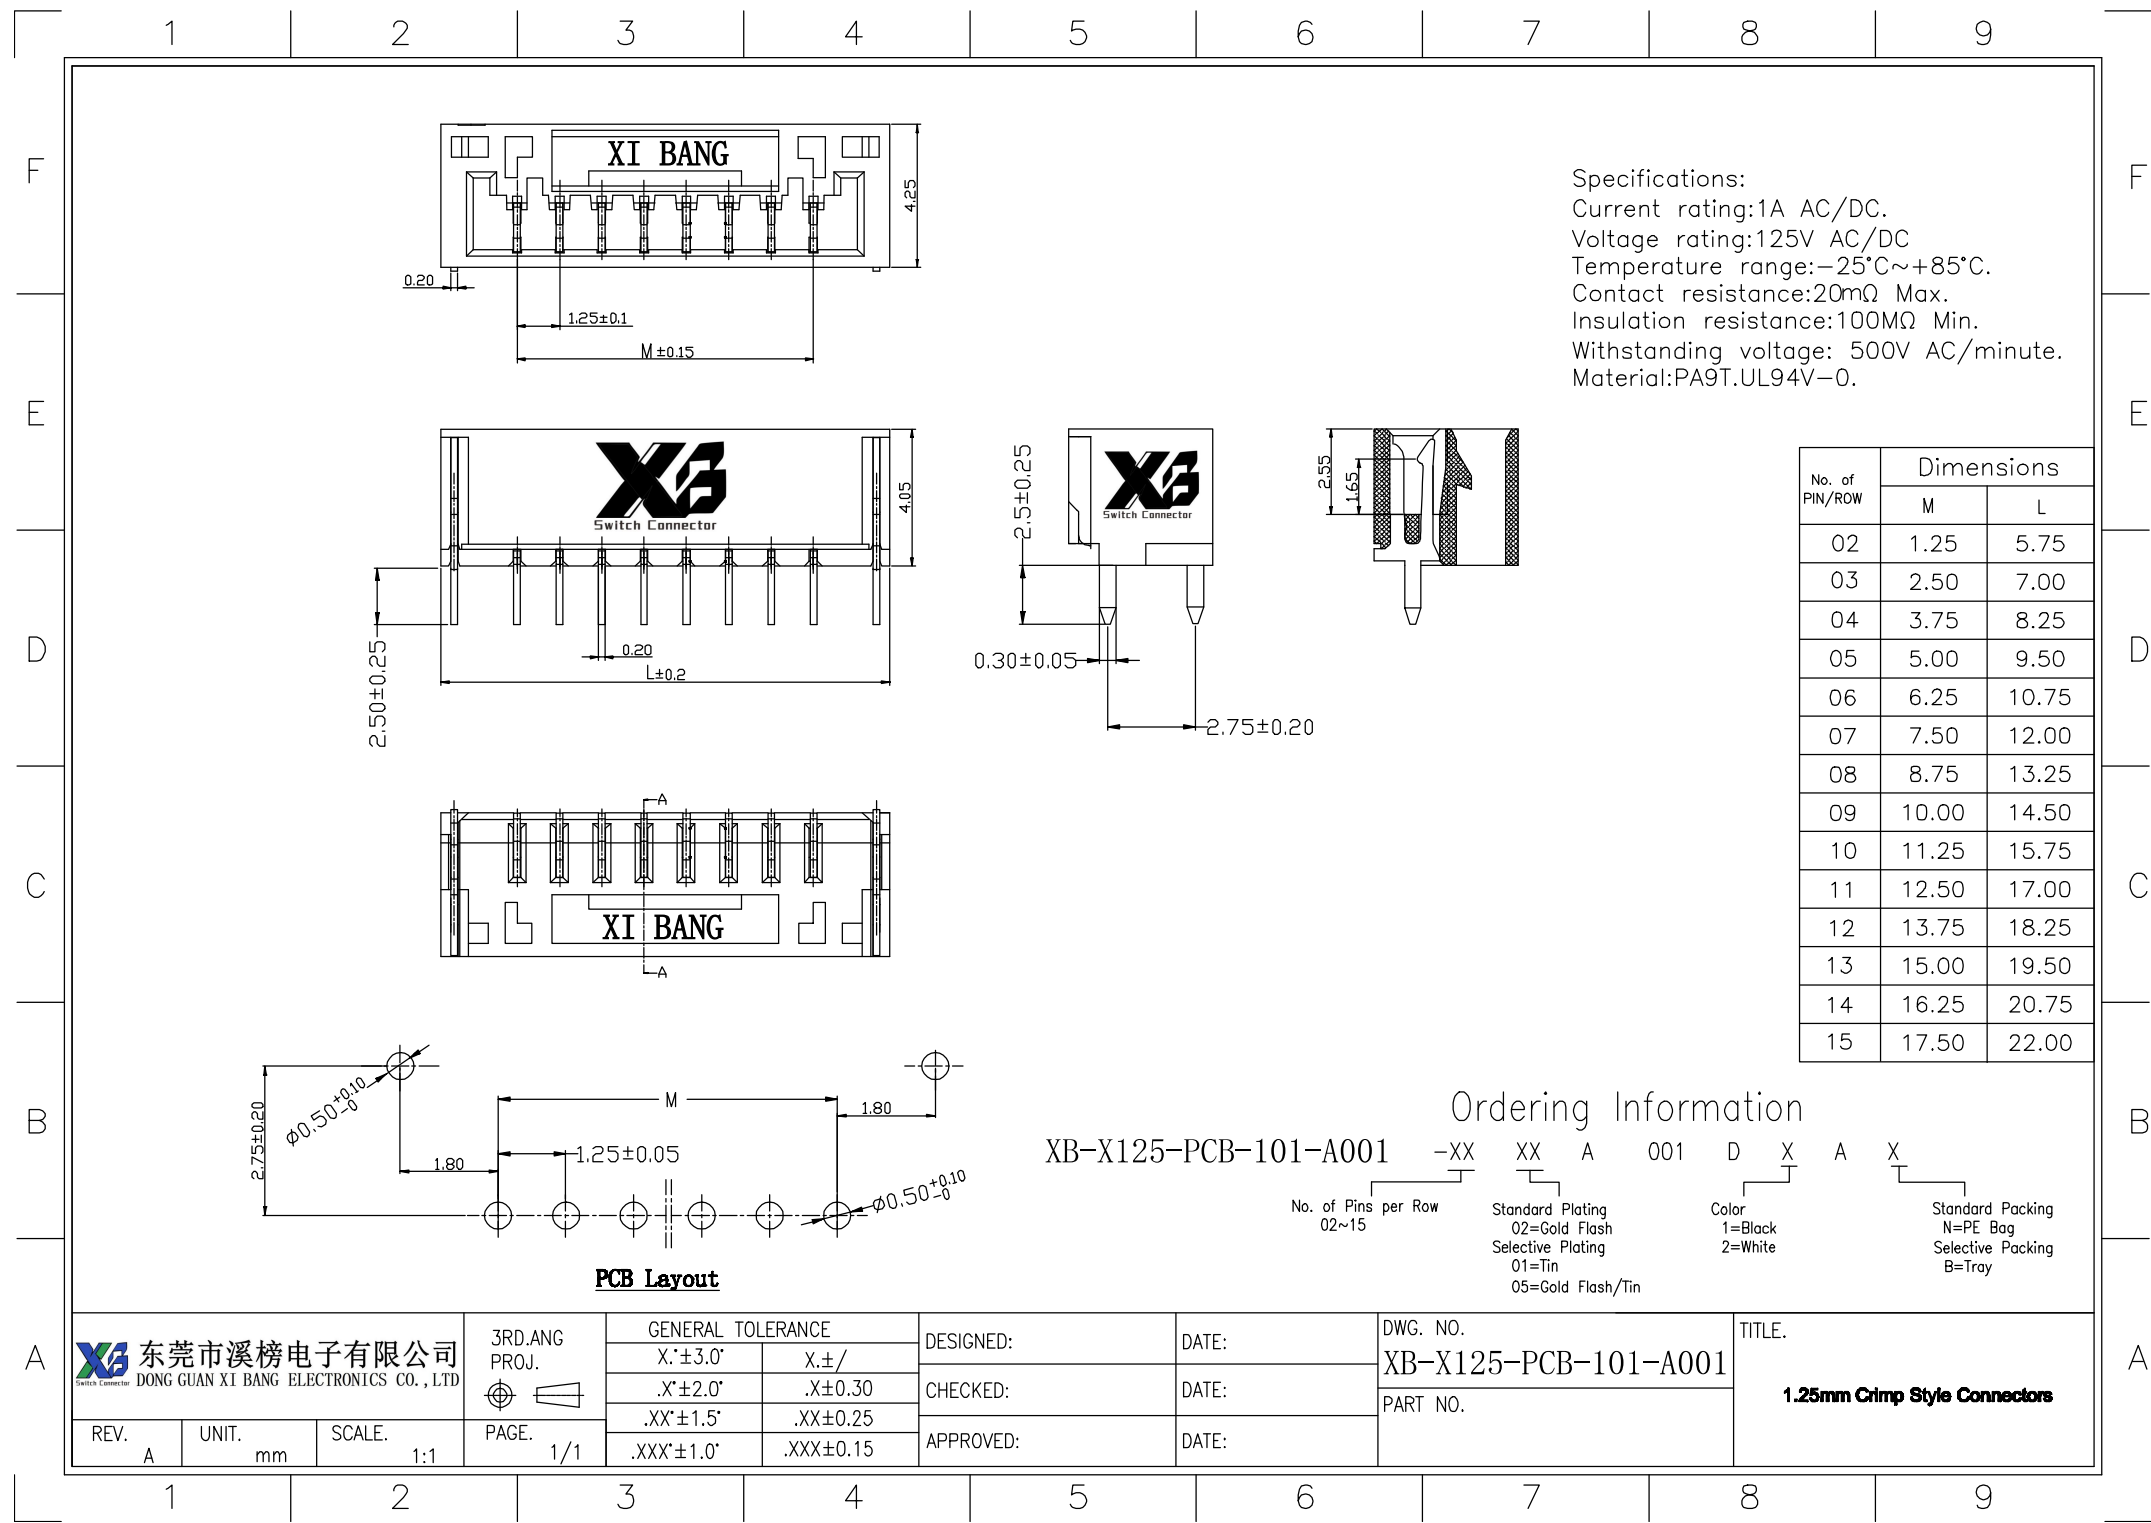


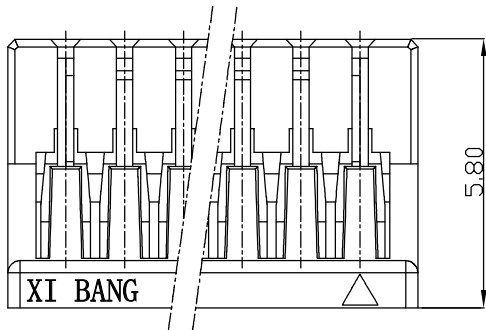



Specifications
Current Rating: 1.0A AC
Current Voltage: 100V AC
Insulation Resistance: $\geq 100M\Omega$
Dielectric Withstanding Voltage: 250VAC
Contact Resistance: $\leq 20m\Omega$
Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Materials
Insulator Material: Nylon-66, UL 94V-0
Mating Terminal: GRD118-T1
All materials must meet XI BANG
hazardous substances control standards.


Pins	Dimensions	
	M	L
02P	1.25	3.60
03P	2.50	4.85
04P	3.75	6.10
05P	5.00	7.35
06P	6.25	8.60
07P	7.50	9.85
08P	8.75	11.10
09P	10.00	12.35
10P	11.25	13.60
11P	12.50	14.85
12P	13.75	16.10
13P	15.00	17.35
14P	16.25	18.60
15P	18.50	19.85

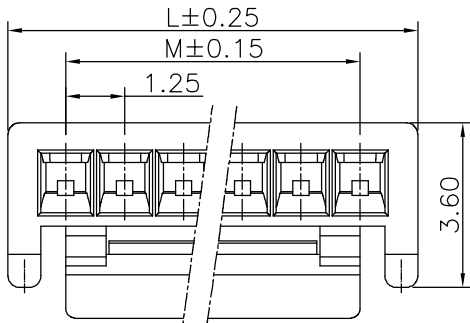

2P-7P

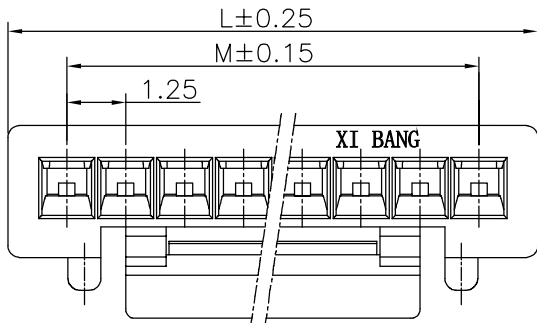

8P以上



Ordering Information

XB-X125-PCB-101-A001M - XX A XX

No. of Pins Per Row SEE TABLE
Materials /Color M=Nylon66/White

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±/*	X.±/
.X.*±/*	.X±0.25
.XX.*±/*	.XX±0.15
.XXX.*±/*	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-X125-PCB-101-A001M
PART NO.

TITLE.
1.25mm PITCH Housing

REV. A
UNIT. mm
SCALE. 1:1

F

E

D

C

B

A

F


E

D

C

B

A

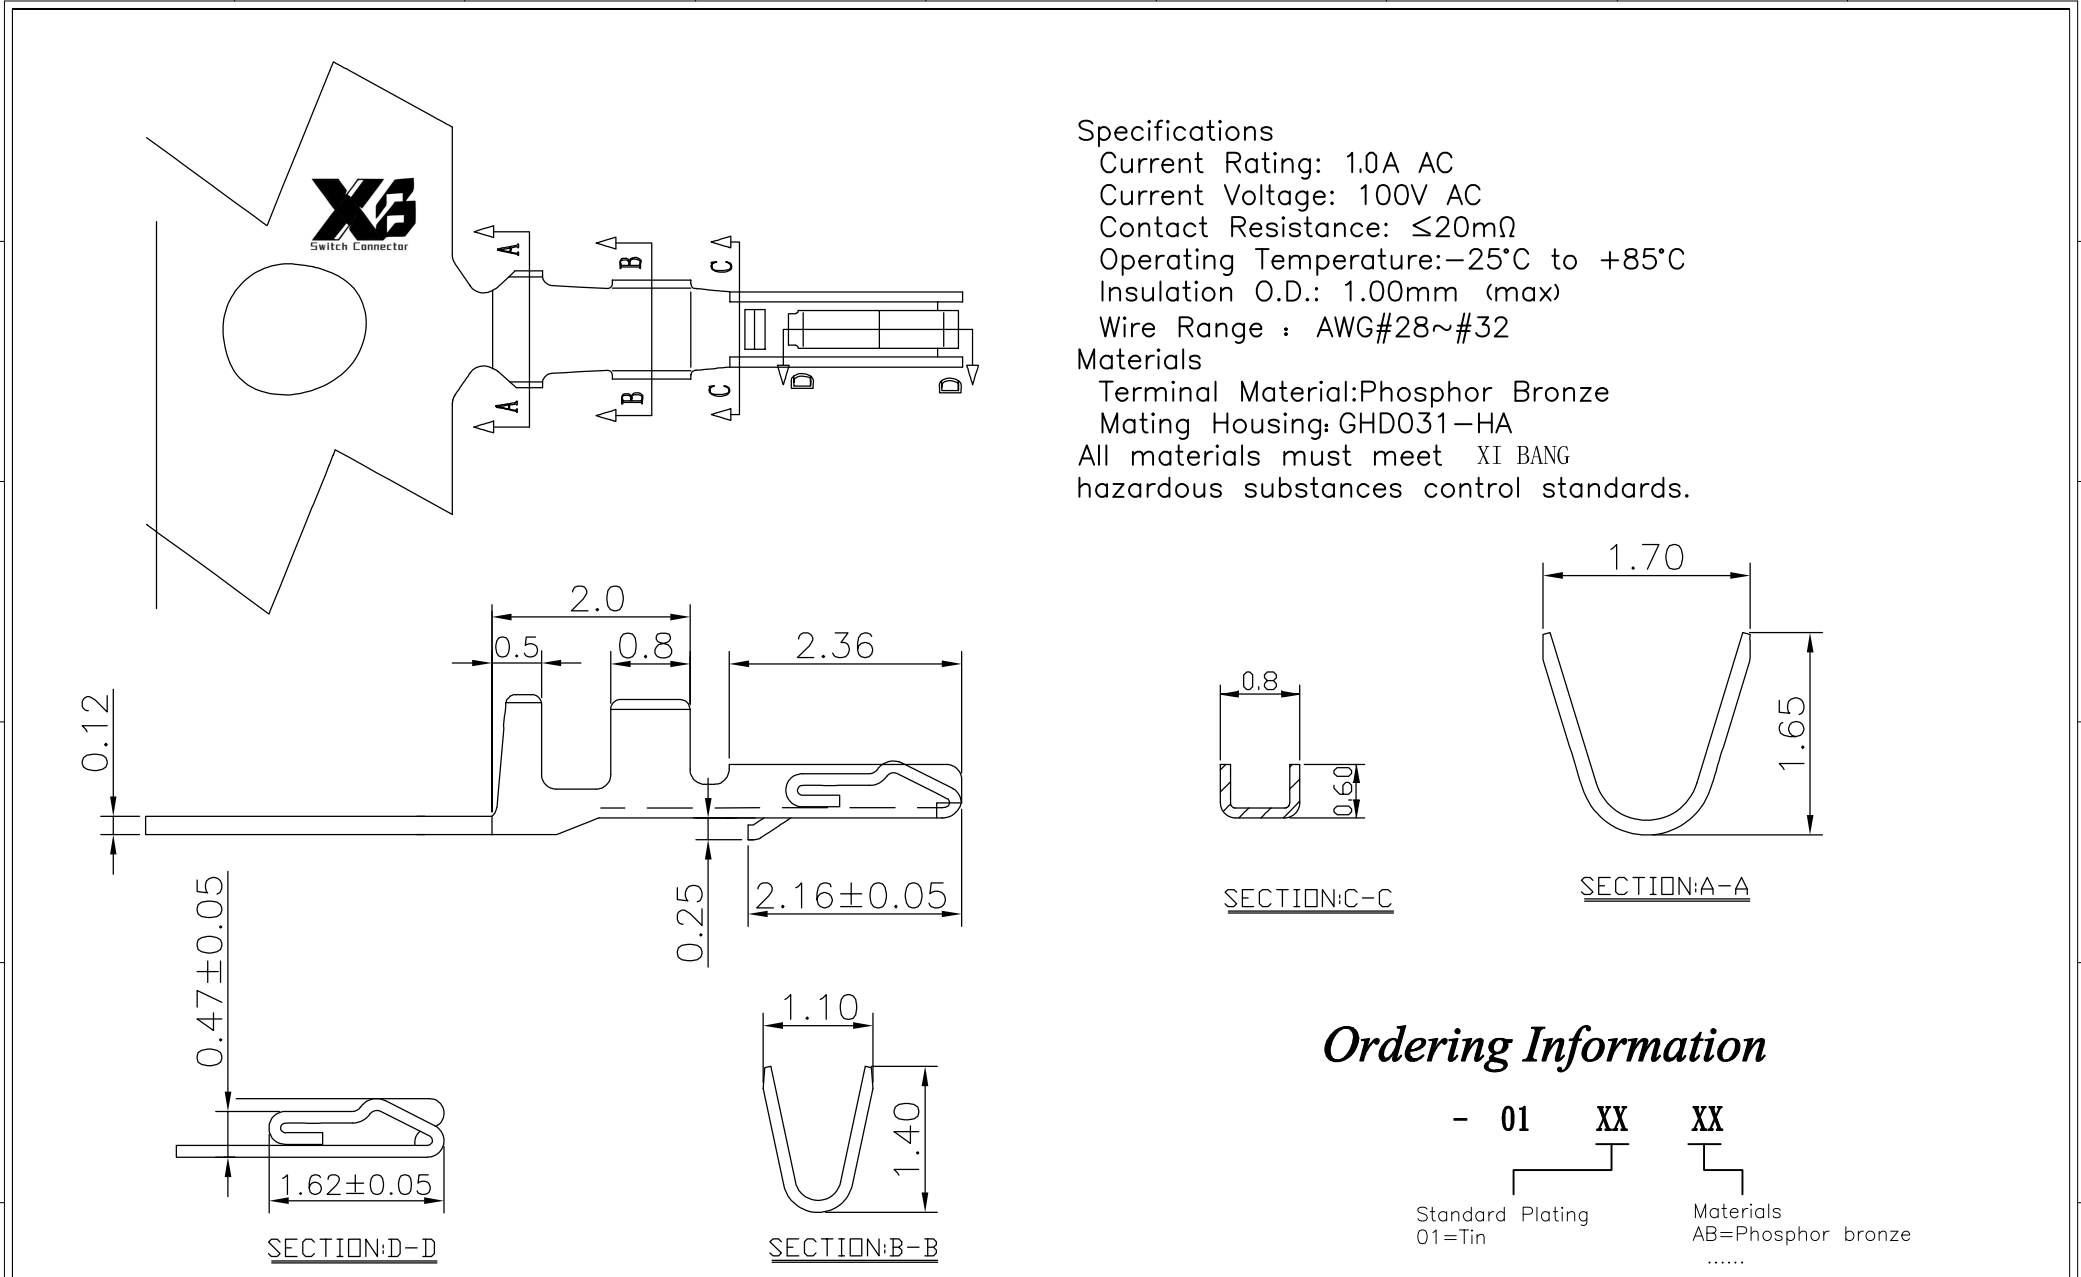

Specifications

Current Rating: 1.0A AC
Current Voltage: 100V AC
Contact Resistance: ≤20mΩ
Operating Temperature: -25°C to +85°C
Insulation O.D.: 1.00mm (max)
Wire Range : AWG#28~#32

Materials

Terminal Material: Phosphor Bronze
Mating Housing: GHD031-HA
All materials must meet XI BANG hazardous substances control standards.

Ordering Information

- 01 XX XX
Standard Plating 01=Tin
Materials AB=Phosphor bronze

3RD.ANG PROJ.			GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-X125-PCB-101-A001D	TITLE. 1.25mm PITCH Terminal
PAGE. 1/1			X.*±/*	X.±/				
			.X.*±/*	.X±0.25				
			.XX.*±/*	.XX±0.15				
REV. A	UNIT. mm	SCALE. 1:1	.XXX.*±/*	.XXX±0.10	CHECKED:	DATE:	PART NO.	