



1 2 3 4 5 6 7 8 9



F

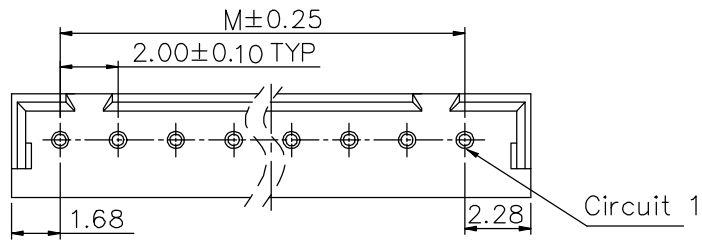


2P 专用

Specifications:
Current rating: 4A AC/DC.
Voltage rating: 125V AC/DC
Temperature range: -40°C~+105°C.
Contact resistance: 10mΩ Max.
Insulation resistance: 1000MΩ Min.
Withstanding voltage: 1000V AC/minute.
Material:
Housing: PA66 UL94V-0
Contact: Copper Alloy

E

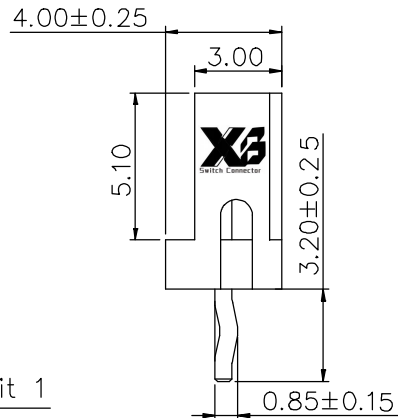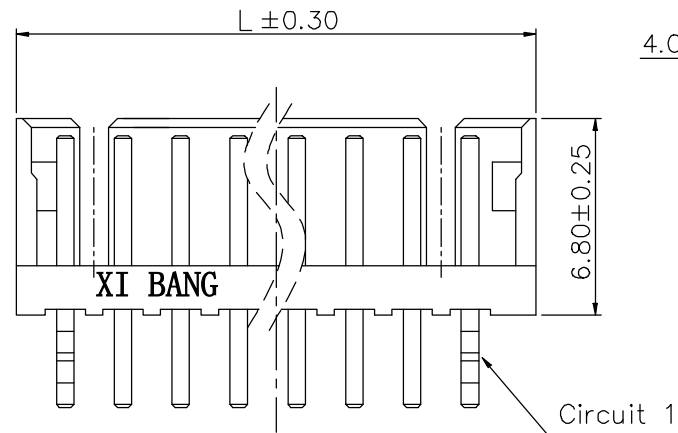

2P 专用

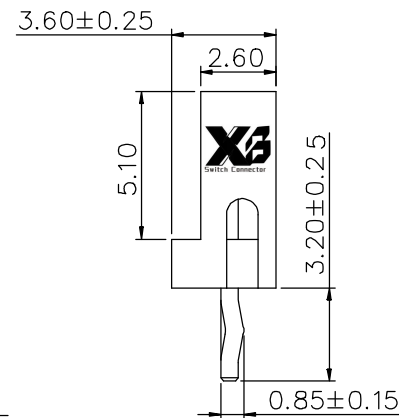

No. of PIN/ROW	Dimensions	
	M	L
02	2.00	5.96
03	4.00	7.95
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96

D

C


F

E

D

C

B



Recommended P.C.B Layout
(Tolerance=±0.05)

XB-X20-PCB-102-A014 - XX XX A 014 E X B X

No. of Pins per Row
02~15


Standard Plating
02=Gold Flash
Selective Plating
01=Tin
22=Matte Tin

Color
1=Black
2=White

Standard Packing
N=PE Bag
Selective Packing
C=Tube

A

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.


GENERAL TOLERANCE	
X: ±5.0°	X: ±/
.X: ±3.0°	.X: ±0.30
.XX: ±2.0°	.XX: ±0.25
.XXX: ±1.0°	.XXX: ±0.15

DESIGNED:

DATE:

DWG. NO.

XB-X20-PCB-102-A014

TITLE.

PITCH 2.0mm 180° WAFER

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV. A UNIT. mm SCALE. 1:1

PAGE. 1/1

1 2 3 4 5 6 7 8 9

A

F

E






D

C

B

A

123456789

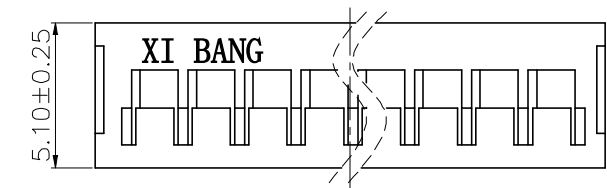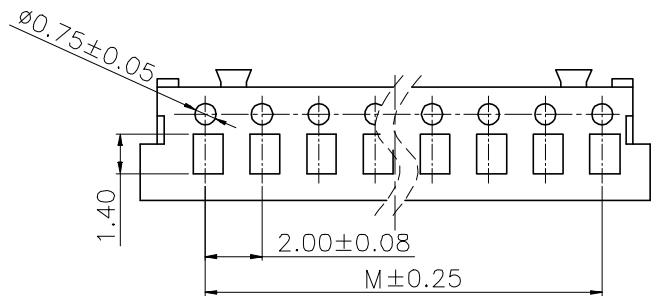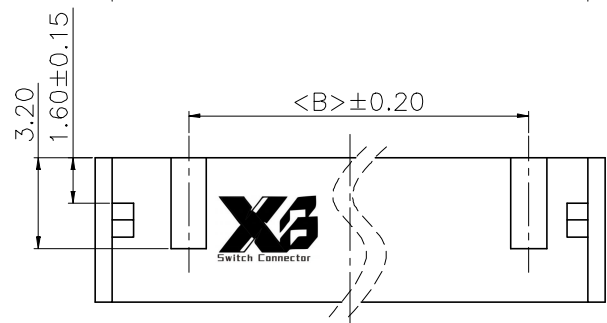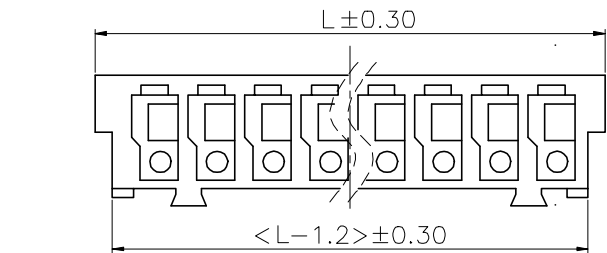

Specifications:
Current rating:4A AC/DC.
Voltage rating:125V AC/DC
Temperature range:−40°C~+105°C.
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 1000V AC/minute.
Material:Nylon66 UL94V−0.

No of Pin/Row	Dimensions		
	M	B	L
02	2.00		6.00
03	4.00		8.00
04	6.00	4.00	10.00
05	8.00	6.00	12.00
06	10.00	8.00	14.00
07	12.00	10.00	16.00
08	14.00	12.00	18.00
09	16.00	14.00	20.00
10	18.00	16.00	22.00
11	20.00	18.00	24.00
12	22.00	20.00	26.00
13	24.00	22.00	28.00
14	26.00	24.00	30.00
15	28.00	26.00	32.00
16	30.00	28.00	34.00


XB-X20-PCB-102-A014M - XX A X

No. of Pin/Row
02 ~16

Material/Color
M=NYLON 66/White
NF=NYLON 66/Transparent

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 / X.?

.X停 / .X?.30

.XX停 / .XX?.20

.XXX停 / .XXX?. 15

DESIGNED:

DATE:

DWG. NO.

XB-X20-PCB-102-A014M

PART NO.

TITLE.

2.00mm pitch housing

CHECKED:

DATE:

APPROVED:

DATE:

REV. A

UNIT. mm

SCALE. 1:1

123456789

F

E

D

C

B

A

1 2 3 4 5 6 7 8 9

F




E

D


C

B


A

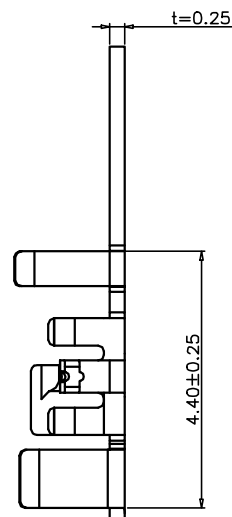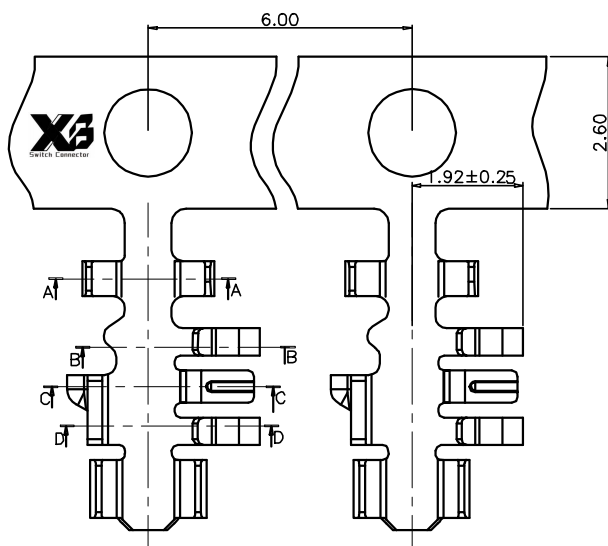



SEC:C-C




SEC:D-D



電鍍後收料方向
(打線開口朝外)



SEC:A-A



SEC:B-B

Ordering Information

XB-X20-PCB-102-A014D

XX


XX

Standard Plating
01=Tin
02=Gold flash

Materials
AB=Phorsphor Bronze

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-X20-PCB-102-A014D

PART NO.

TITLE.

2.00mm Pitch Terminal

REV.	UNIT.	SCALE.
A	mm	1:1

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A