
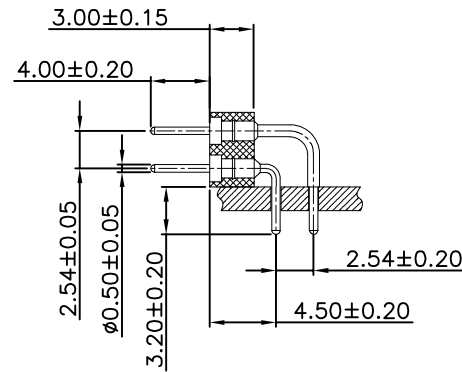
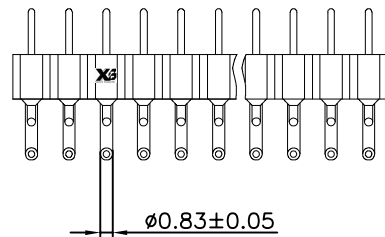


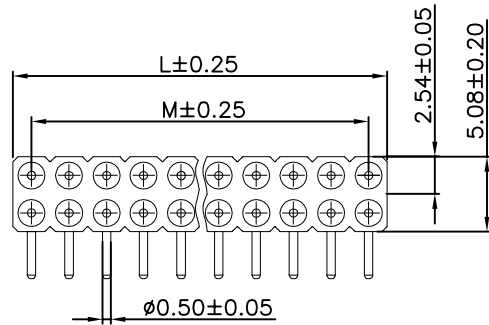

Technical Specs:
Insulator:Black glass filled polyester PPS-GF30-FR
Flammability:UL 94V-0
Contact:Brass CuZn36Pb3(C36000)
Rated current:3A
Contact resistance:max 10 mΩ
Dielectric strength:min 1,000 V RMS
All materials must meet XI BANG
hazardous substances control standards.

Ordering Information

202 - XX XX A 002 S X B X

No. of Pins per Row 01~40
Standard Plating
01=TIN
02=Gold Flash
B1=Gold 3U"

Color
1=Black

Standard Packing
C=Tube
N=PE Bag

No. of PIN/ROW	M	L
01	0	2.54
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.6

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±3.0°	X.±/
.X*±3.0°	.X±0.30
.XX*±3.0°	.XX±0.25
.XXX*±3.0°	.XXX±0.20

DESIGNED:

DATE:

DWG. NO.

XB-PM-Y-254X-202-A002

TITLE.

2.54 PIN CONNECTOR
H=3.00mm DIP

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV.	UNIT.	SCALE.
A	mm	1:1