
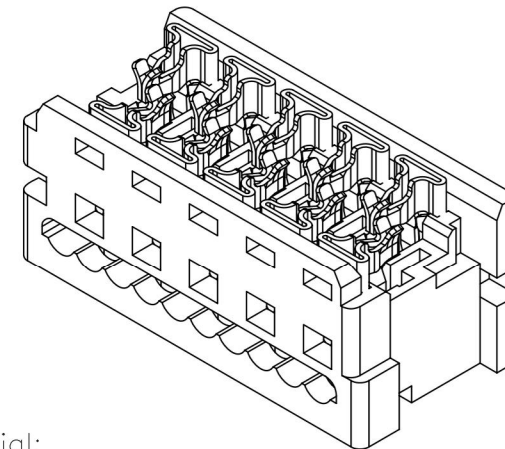



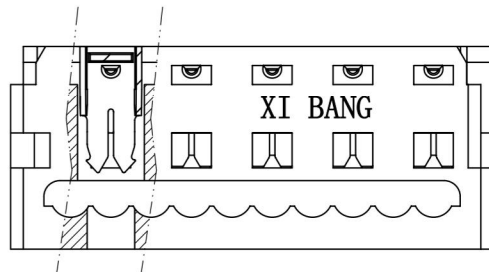

Material:

* Insulation:

Base: Glass Filled Polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CA33 ** P 1 0 I 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.:

② No. of Circuits: 04 to 26

③ Contacts Type: P= Pin Header

④ Plating option:

1= 30u" Min. Tin Plated



(Reflow Plated)

⑤ Color: 0= Nature

⑥ Type: I= IDC Type

⑦ Option: 0= Standard (Tube Packing)

⑧ NH= Halogen-Free

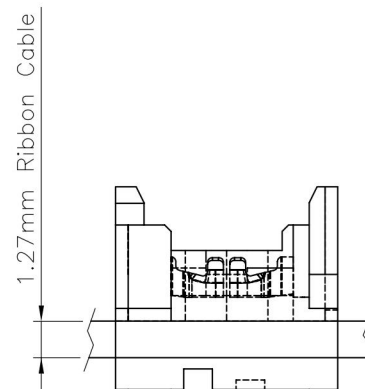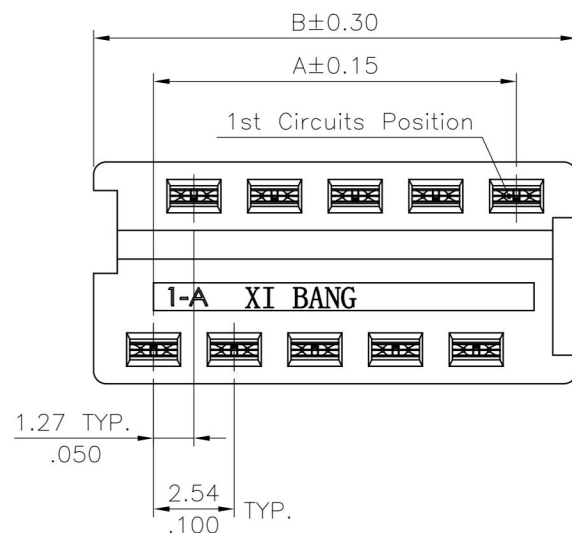

DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 3.78

*Available in 4 ~ 26 Circuits

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.27mm Pitch IDC Type Connector	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Clark	1/15-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CA3301SA
2				ENGINEER: Clark	1/18-10'	.X ± 0.30/.012	X" ± 1"	FINISH:	SCALE		4 / 1	SHEET
1				CHECKED BY: Eisley	1/22-10'	.XX ± 0.20/.008	X" ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	1/22-10'	.XXX ± 0.10/.004	.XX" ±					