
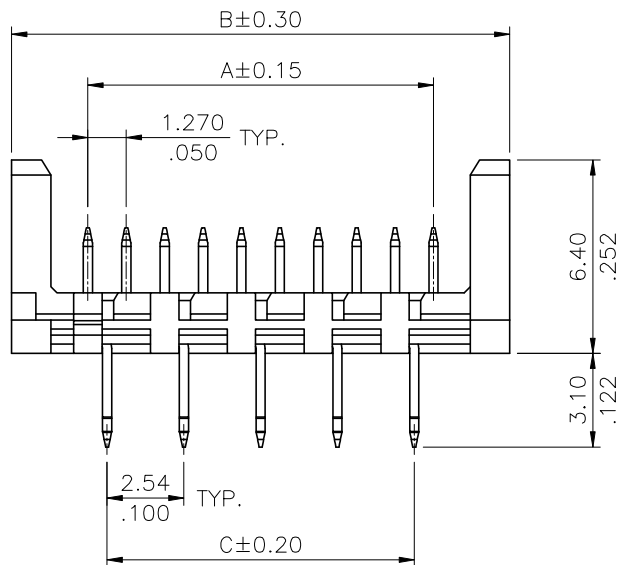


DIM.A= 1.27 x No. of Spaces
 DIM.B= DIM.A + 5.05
 DIM.C= 2.54 x No. of Spaces
 *Available in 4 ~ 26 Circuits

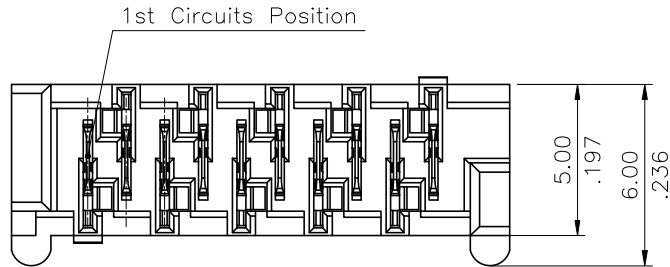

Material:

* Insulation:




Base: Glass filled polyester UL 94V-0

Contact: Brass

Ordering Code:

CA35 ** V 1 1 0B - NH -X89
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.:
- ② No. of Circuits: 04 to 26
- ③ Contacts Type: V= Straight Type
- ④ Plating option:
1= Matte Tin over Nickel plated
- ⑤ Color: 1= Black
- ⑥ Option: 0B= TYPE B
- ⑦ NH= For Lead Free flow Processes and Halogen-Free
- ⑧ X89= Customer Code

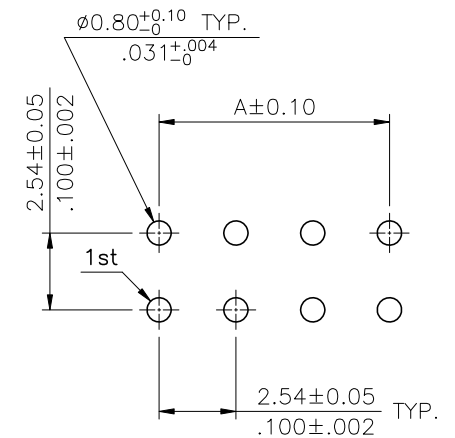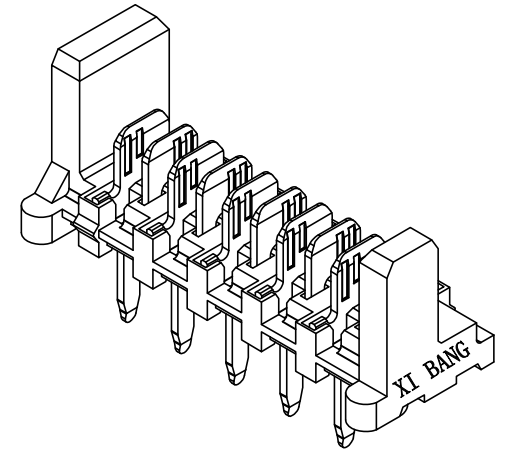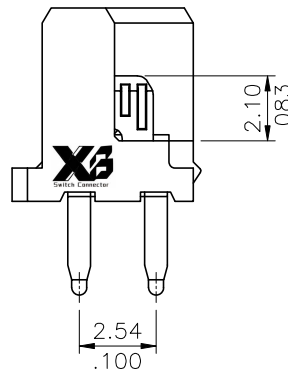

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27mm Pitch DIP V Type Connector	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Clark	06/29-20	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 .X* ± 1" .XX ± 0.20/.008 .X* ± .XXX ± 0.10/.004 .XX ±	MATERIAL:	
2				ENGINEER: Clark	06/29-20		FINISH:	
1				CHECKED BY: Eisley	06/29-20			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	06/29-20			
								DRAWING NO. CA3527S1 PART NO. CA35**V110B-NH-X89 SCALE 4 / 1 SHEET 1 OF 1