
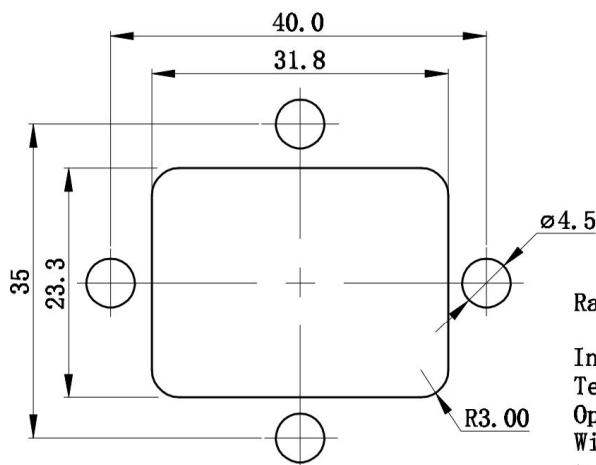
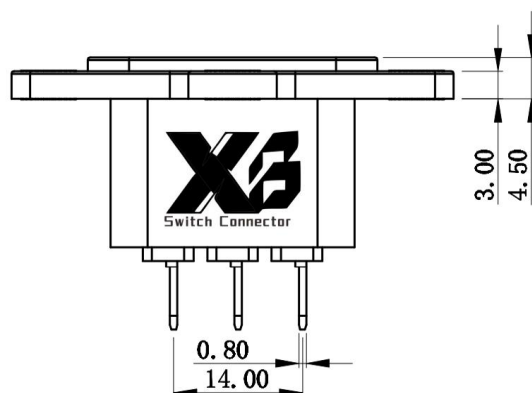
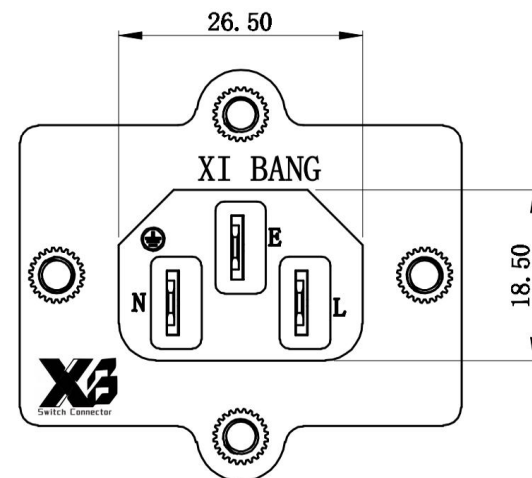
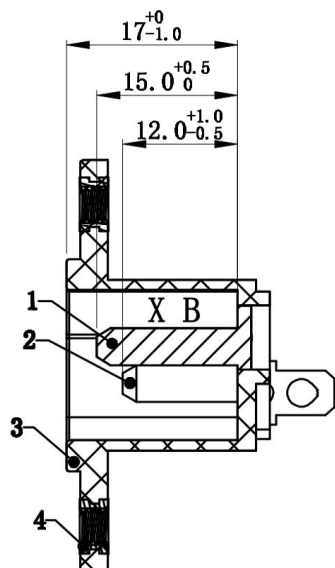


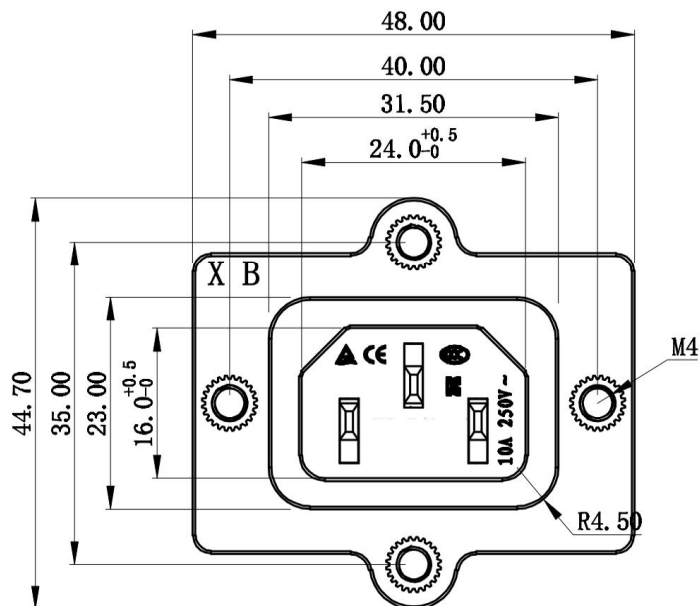

PANEL CUT-OUT

序号	名称	材质	数量
1	接地插销	黄铜t2.0	1
2	载流插销	黄铜t2.0	2
3	基座	PA66	1
4	螺纹卡键	黄铜	4

Rating :
10A 250V AC 3C KC CE TUV
Insert And Extract Force: 1.36kgf~6.8kgf
Terminal Strength: ≥80N
Operating Life: ≥5000 cycles
Withstand Voltage:Between all
terminals:2500VAC (50-60Hz)lmin
Terminals to Base:3750V AC (50-60Hz)lmin
Leakage Current:1mA
Insulation Resistance: ≥100MΩ 500V DC

A4				普通公差		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	Ac Inlet C14型	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	高鹏	核 对 CHECKED BY	贺龙飞	料 号 DWG NO.	XB-AC-14-15TLZ		
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ABOVE 30	±0.50	日 期 DATE	2024-8-1	核 准 APPROVAL BY	庞东	图 号 MODEL NO.		
					ANGULAR	±5°							