

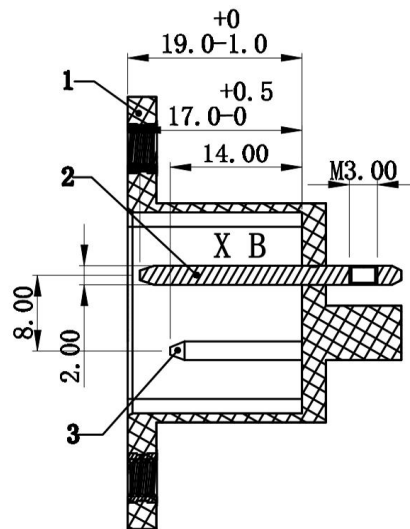
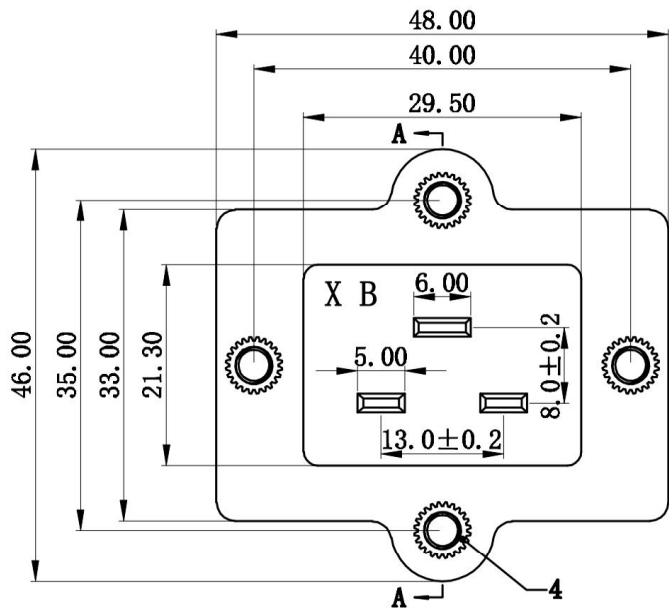
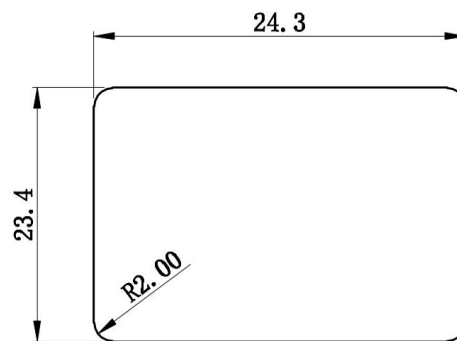


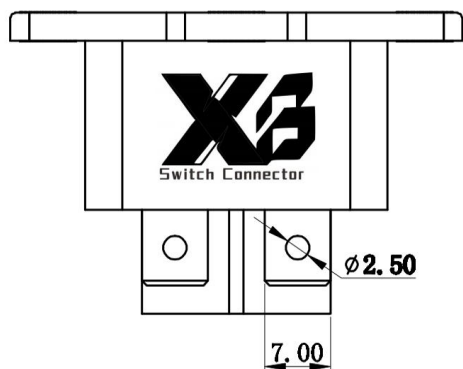

剖面 A-A

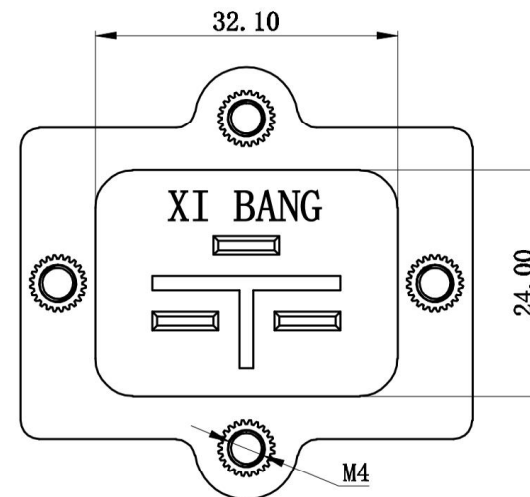

PANEL CUT-OUT

序号	名称	材质	数量
1	基座	PA66	1
2	接地插销	黄铜t2.0	1
3	载流插销	黄铜t2.0	2
4	螺纹卡键	黄铜	4

Rating:

16A 250V AC 3C KC TUV CE
20A 250V AC UL cUL

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: ≥80N

Operating Life: ≥5000 cycles

Withstand Voltage: Between all terminals:2500VAC(50-60Hz)1min

Terminals to Base:3750VAC(50-60Hz)1min

Leakage Current:1mA

Insulation Resistance:≥100 M 500V DC

Body Material: NYLON66 94V-2~0

A4				普通公差 COMMON TOLERANCE :	单位 UNIT	mm	投影 PROJECTED	品名 PRODUCT NAME	Ac Inlet C20	比例 SCALE	Free
A3											
A2											
A1											
REV.	DATE	REVISION	DESCRIPTION	ISSUE	日期 DATE	2024-8-1	核准 APPROVAL BY	贺龙飞 贺龙飞	料号 MODEL NO.	XB-AC-20-5TLZ	