

Material:

* Insulation: Nylon 66 UL 94V-0

* Contact: Brass

Ordering Code:

CI01 ** P 1 V D H -1
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ P= Pin Header

④ Plating:

1= 120μ" Min. Tin Plated over 30μ" Nickel





⑤ Tail type: V= Straight

⑥ Option: D= Dual Row type

⑦ Other Option: H= Type of customer requirements

⑧ -1= Color Black

Blank= Color Nature

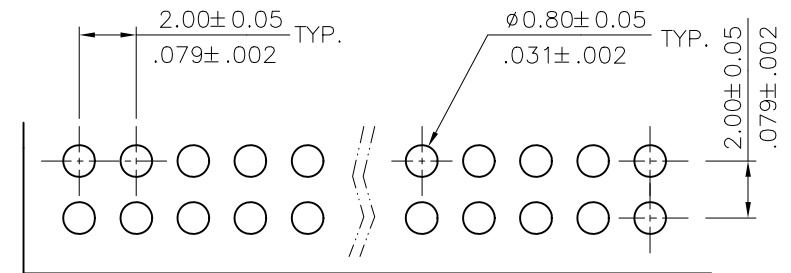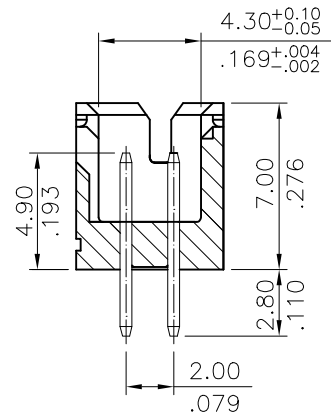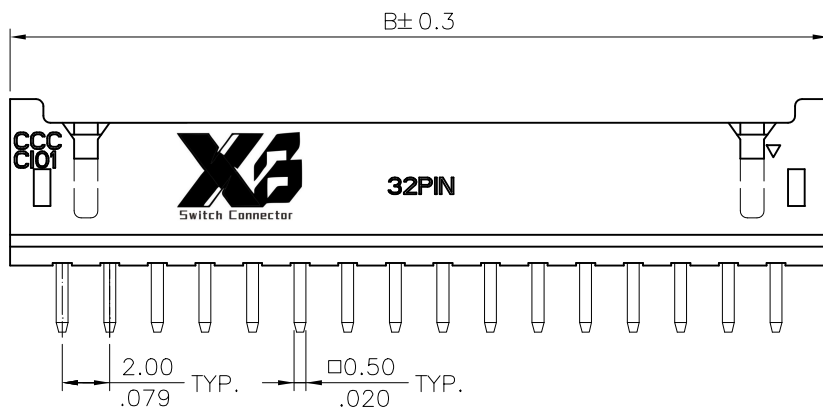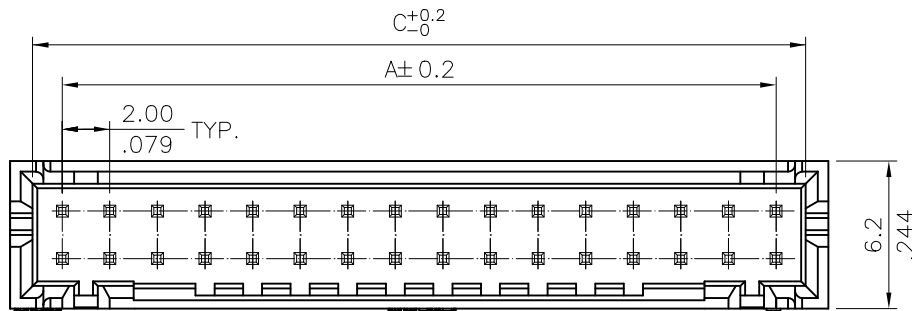

Recommended P.C. Board Layout

A = 2.0 x (No. of Circuits/2-1)

B = A + 4.4

C = A + 2.5

* Available in 6 through 34 circuits

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 2.0mm DUAL ROW HEADER (STRAIGHT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY:	Karen	1/11-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	Karen	1/11-17'	.X ± 0.30/.012	X' ± 1'		MATERIAL:
5				CHECKED BY:	Eisley	1/13-17'	.XX ± 0.20/.008	.X' ±		CUSTOMER:
SYM NAME DATE REVISIONS				APPROVED BY:	Eisley	1/13-17'	.XXX ± 0.10/.004	.X' ±	ACL1045	DRAWING NO. CIO116BA PART NO. CIO1**P1VDH CIO1**P1VDH-1
									SCALE 3 / 1	SHEET 1 OF 1