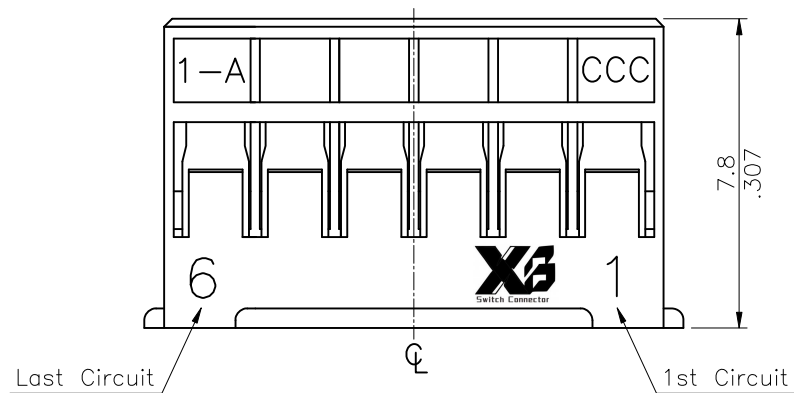
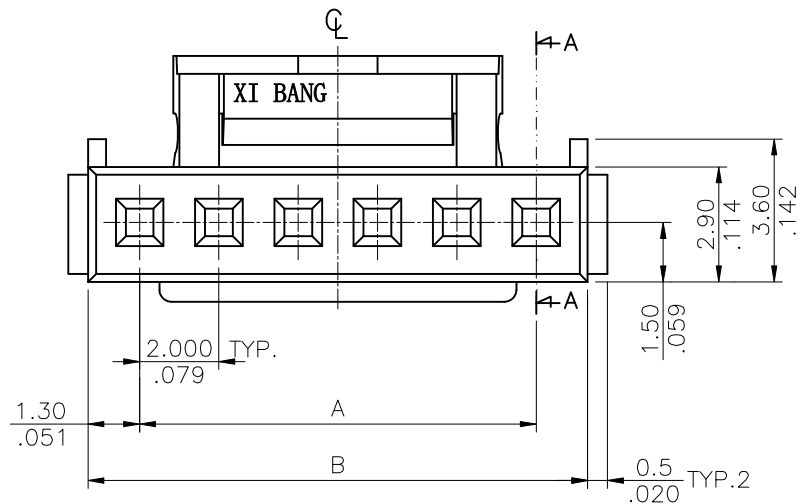


SEC A-A

Material:
Nylon 66 UL 94V-0, Color Nature

Ordering Code

CI06 ** S 0000
① ② ③ ④

- ① Series No.
② No. of Circuits:
③ S= Connector housing
④ Other option: 0000= Standard

Circuits	Dimension	
	A	B
2	2.00(.079)	4.6(.181)
3	4.00(.157)	6.6(.260)
4	6.00(.236)	8.6(.339)
5	8.00(.315)	10.6(.417)
6	10.00(.394)	12.6(.496)
7	12.00(.472)	14.6(.575)
8	14.00(.551)	16.6(.654)
9	16.00(.630)	18.6(.732)
10	18.00(.709)	20.6(.811)
11	20.00(.787)	22.6(.890)
12	22.00(.866)	24.6(.969)
13	24.00(.945)	26.6(1.047)
14	26.00(1.024)	28.6(1.126)
15	28.00(1.102)	30.6(1.205)
16	30.00(1.181)	32.6(1.283)



RoHS Compliant

④						DATE	UNIT: mm / inch		TITLE: 2.00MM(.079") CRIMP TERMINAL HOUSING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
③				DRAWN BY:	Sandy	4/2-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CI0603SB	PART NO.	CI06**S0000		
②				ENGINEER:	Eisley	4/3-07'	.X ± 0.30/.012	X' ± 1'	FINISH:							SCALE	4 / 1
①	Sandy	4/2-07'	ECN07128	CHECKED BY:	David	4/3-07'	.XX ± 0.20/.008	.X' ±			SYM	NAME	DATE	REVISIONS	APPROVED BY:		