

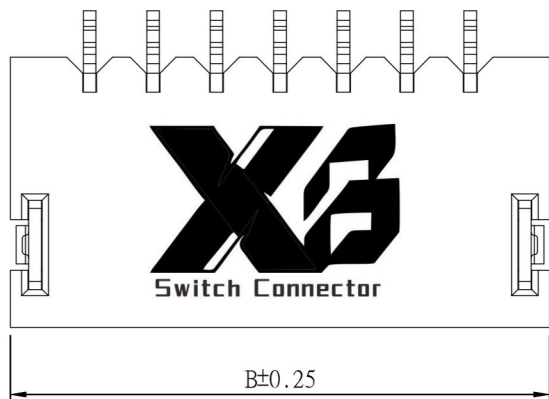
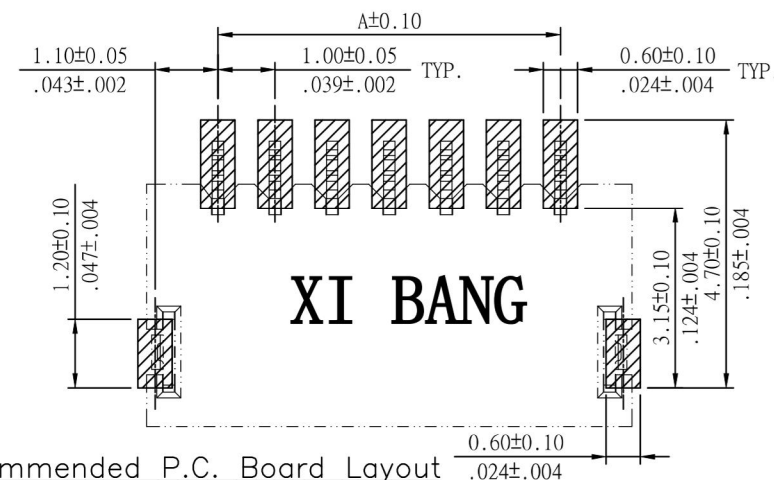


Tab: Copper alloy with Matte Tin plated

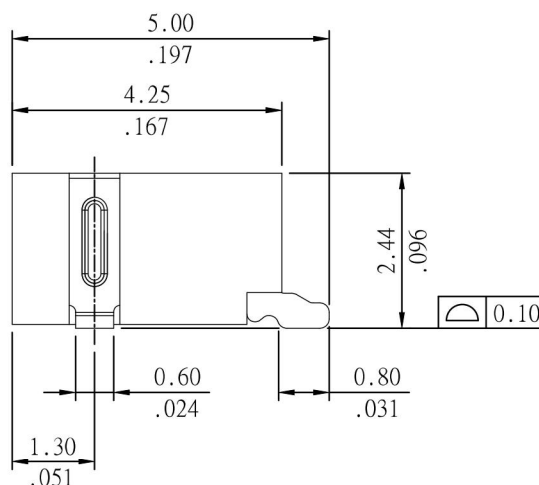


Cl14	**	M	1	H	R	0	-NH
①	②	③	④	⑤	⑥	⑦	⑧

- ① Series No.
- ② No. of Circuits: 2~20 Pin
- ③ M= SMT Type Wafer
- △④ Plating: 1= Matte Tin Plating over Nickel
- ⑤ Type: H= Side Entry

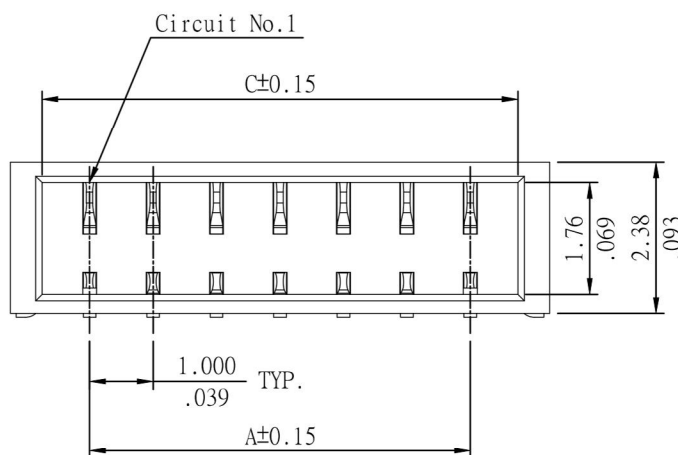

RoHS Compliant




6	Amy	12/11-23'	ECNT123179/ECRB123029		DATE	UNIT: mm / inch	TITLE: 1.00MM(.079") WIRE TO BOARD CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
5	Ellie	6/3-15'	ECNT115129/ECRH115027	DRAWN BY:	Amy	12/11-23'			TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
4	Sun	7/11-11'	ECR10039-2/ECN11060	ENGINEER:	Sun	12/11-23'	.X ± 0.25/.010	X' ± 1'			DRAWING NO.	CI1404SE
3	Sun	11/25-09'	ECN09565	CHECKED BY:	Eisley	12/11-23'	.XX ± 0.15/.006	.X' ±	FINISH:	SCALE		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	12/11-23'	.XXX ± 0.08/.003	.XX' ±				

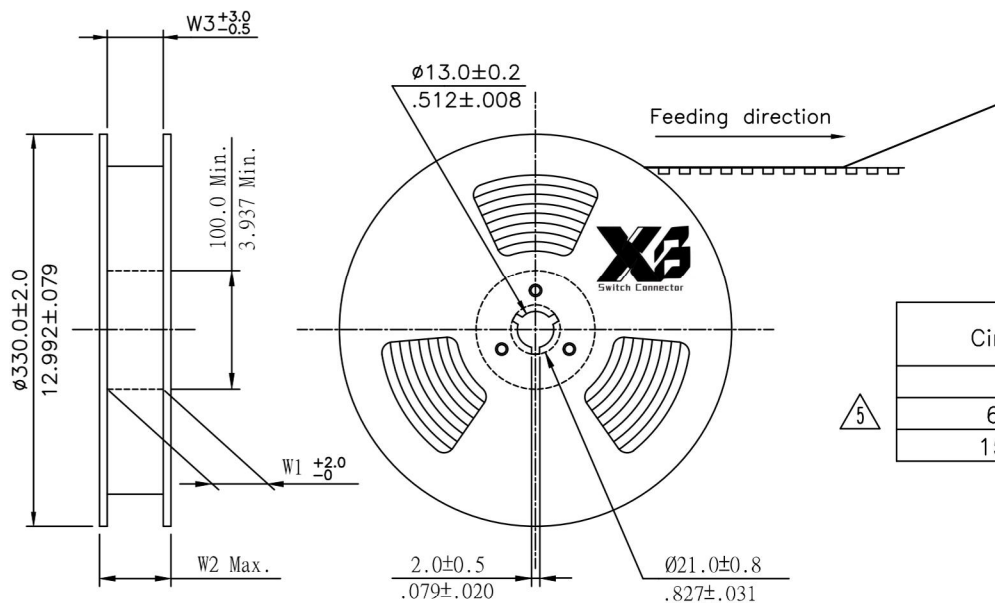

NOTE :

- * Reel Material : HIPS
- * Carrier Material : Clear, Conductive Polystyrene Alloy & Corrugated Paper
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481 requirements.
- * Quantity : 2000 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2~5	16.0	—	16.5	22.5	16.5	11
6~14	24.0	—	24.5	30.5	24.5	9
15~20	32.0	28.40	32.5	38.5	32.5	7

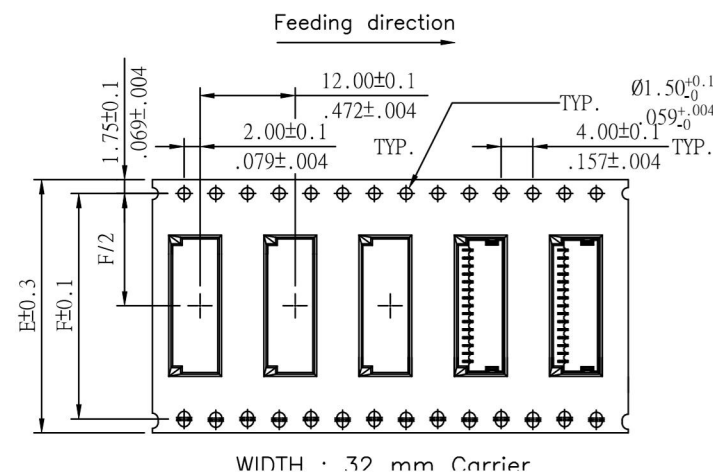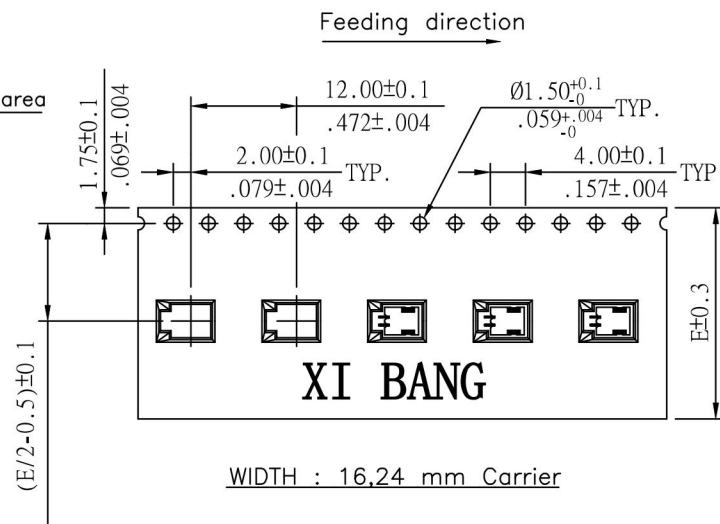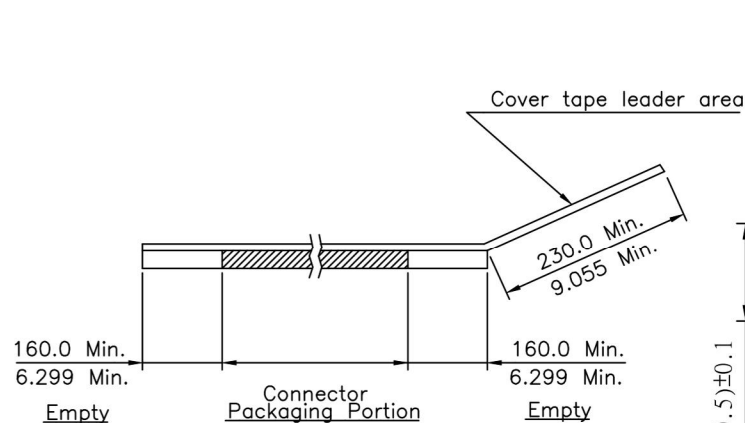

WIDTH : 16.24 mm Carrier

WIDTH : 32 mm Carrier

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

△6	Amy	12/11-23'	ECNT123179/ECRB123029		DATE	UNIT: mm / inch	TITLE: 1.25mm Side entry SMT Type Connector	 瀚荃股份有限公司 CviLux Corporation	
△5	Ellie	6/3-15'	ECNT115129/ECRH115027	DRAWN BY:	Amy	12/11-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
△4	Sun	7/11-11'	ECR10039-2/ECN11060	ENGINEER:	Sun	12/11-23'	.X ± X' ± 1'	DRAWING NO. CI1404SE PART NO. CI14**M1HR0-NH	
△3	Sun	11/25-09'	ECN09565	CHECKED BY:	Eisley	12/11-23'	.XX ± X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	12/11-23'	.XXX ± X' ±	SCALE	SHEET 2 OF 2