

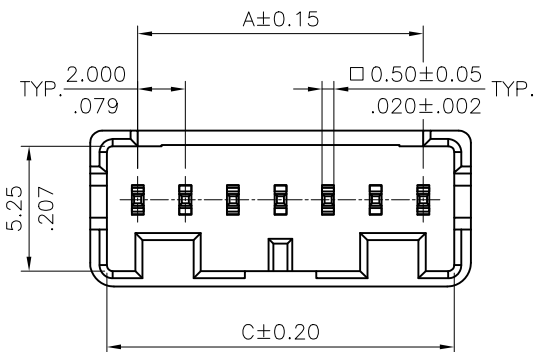


Material  
 Insulator: Halogen Free Plastic  
 UL 94V-0  
 Contact: Copper alloy

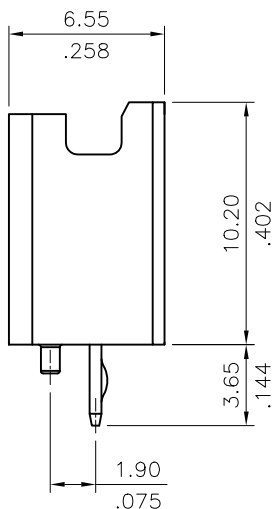


DIM. A = 2.0 x NO. OF SPACES  
 DIM. B = DIM. A + 4.0  
 DIM. C = DIM. A + 2.6  
 \* AVAILABLE IN 2 THROUGH 10

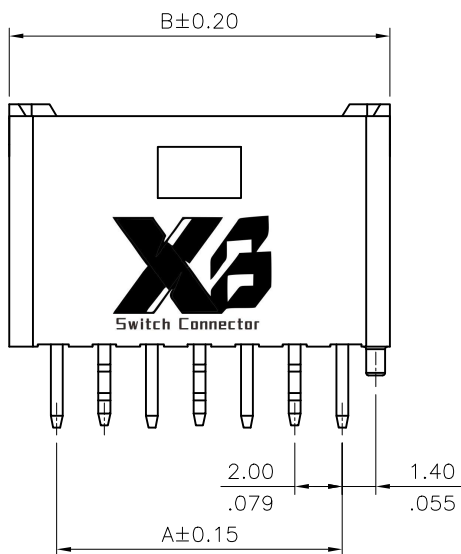

### ORDERING CODE

C109 \*\* P \* V K \* -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Contact: 02 to 10
- ③ P= DIP header
- ④ Plating :  
 1= 3.05μm(120μ") Min. Matte Tin  
 over 0.76um(30u") Nickel
- ⑤ Contact type: V= Straight
- ⑥ Option: K= PIN kinked (Standard)
- ⑦ Color: 0= Nature , 3= Red
- ⑧ -NH= For Lead Free IR Processes and Halogen-Free

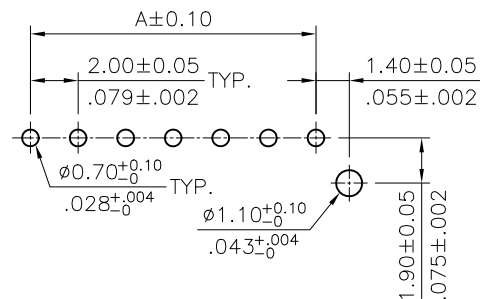


Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.0mm Pitch WTB Connector	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Hank	3/09-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2				ENGINEER: Clark	3/13-15'	.X ± 0.30/.012 X' ± 1'	FINISH:	
1				CHECKED BY: Eisley	3/13-15'	.XX ± 0.20/.008 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/13-15'	.XXX ± 0.10/.004 X' ±		DRAWING NO. C10901SA PART NO. C109**P*VK0-NH
SCALE 3 / 1 SHEET 1 OF 1								