



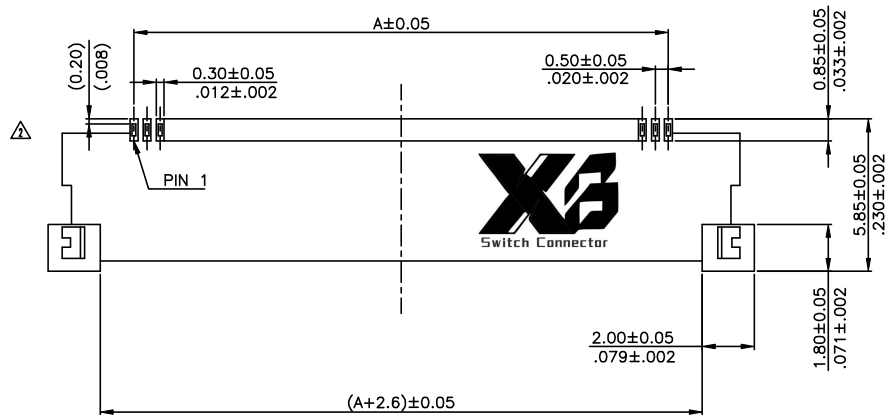

RECOMMENDED PCB LAYOUT
TOP VIEW

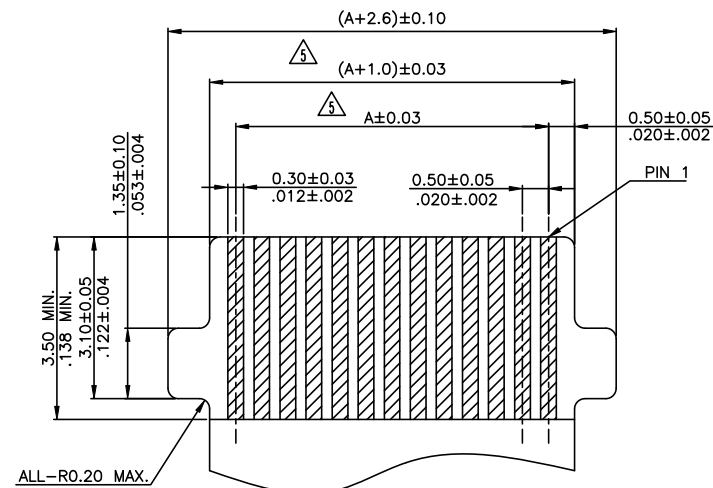


THICKNESS:0.3±0.03
APPLICABLE FFC/FPC DIM.(REF)

Halogen-Free




Lead Free Process

RoHS Compliant


7	Sun	10/6-22'	ECNT122187		DATE	UNIT: mm / inch	TITLE: 0.50mm(.020") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
6	Sun	9/02-22'	ECRH122039/ECNT122168	DRAWN BY:	Sun	11/02-22'					
5	Sandy	2/26-21'	ECNT121059/ECRH121009	ENGINEER:	Sun	11/02-22'		DRAWING NO. CF6901SG PART NO. CF69***D0*0-05-NH			
4	Yushu	06/16-20'	ECNT120159	CHECKED BY:	Eisley	11/02-22'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/02-22'		SCALE	5 / 1	SHEET	2 OF 3

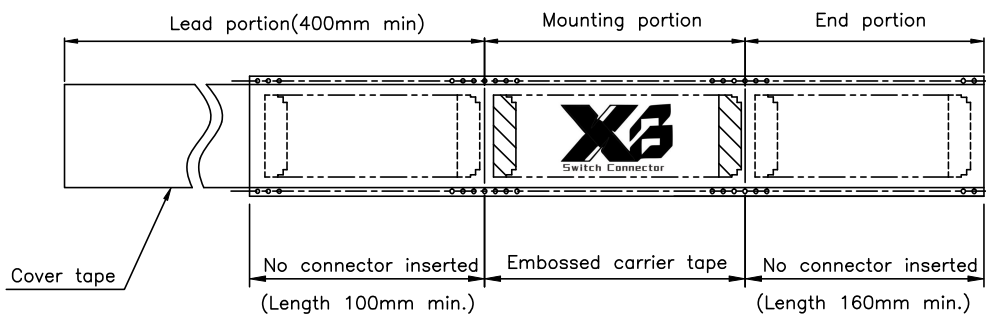

←
TAPE RUNNING DIRECTION

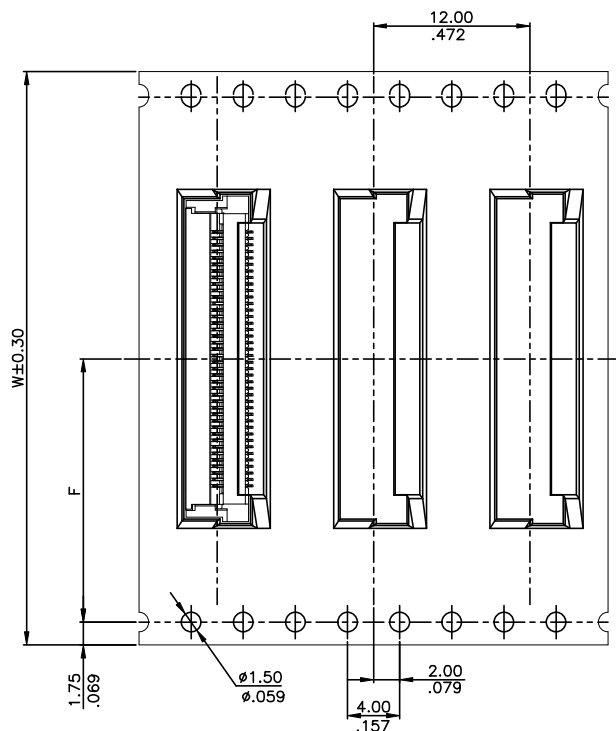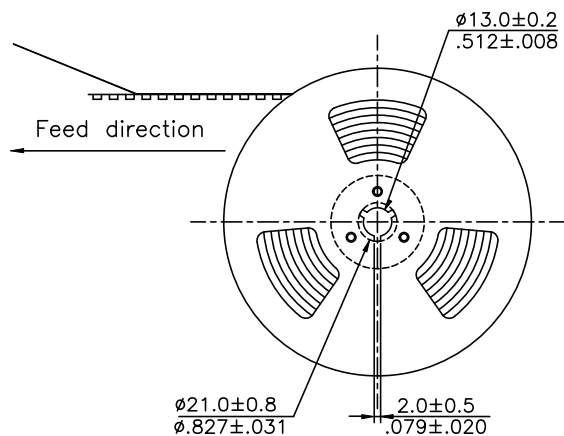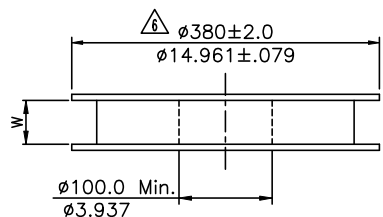

WIDTH : 32.44 mm Carrier



Notes:

1. Reel Material : HIPS
2. 10 sprocket hole pitch cumulative tolerance ± 0.2
3. Material: Polystyrene.
4. All dimensions meet EIA-481-B requirements.
5. Quantity: 3000 Pcs/Reel

Circuits	Dimension		Packing (Reel/Carton)
	W	F	
Δ 40,44,50	44.0(1.732)	20.20(.795)	4

RoHS Compliant

7	Sun	10/6-22'	ECNT122187		DATE	UNIT: mm / inch		TITLE: 0.50mm(.020") ZIF FFC/FPC ONE-TOUCH CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
6	Sun	9/02-22'	ECRH122039/ECNT122168	DRAWN BY:		TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
5	Sandy	2/26-21'	ECNT121059/ECRH121009	ENGINEER:		.X ± 0.30/.012	X" ±					
4	Yushu	06/16-20'	ECNT120159	CHECKED BY:		.XX ± 0.10/.004	.X" ± 2"					
SYM	NAME	DATE	REVISIONS	APPROVED BY:		.XXX ±	.XX" ±			FINISH:		
									DRAWING NO.	CF6901SG	PART NO.	CF69***D0*0-05-NH
									SCALE	5 / 1	SHEET	3 OF 3