


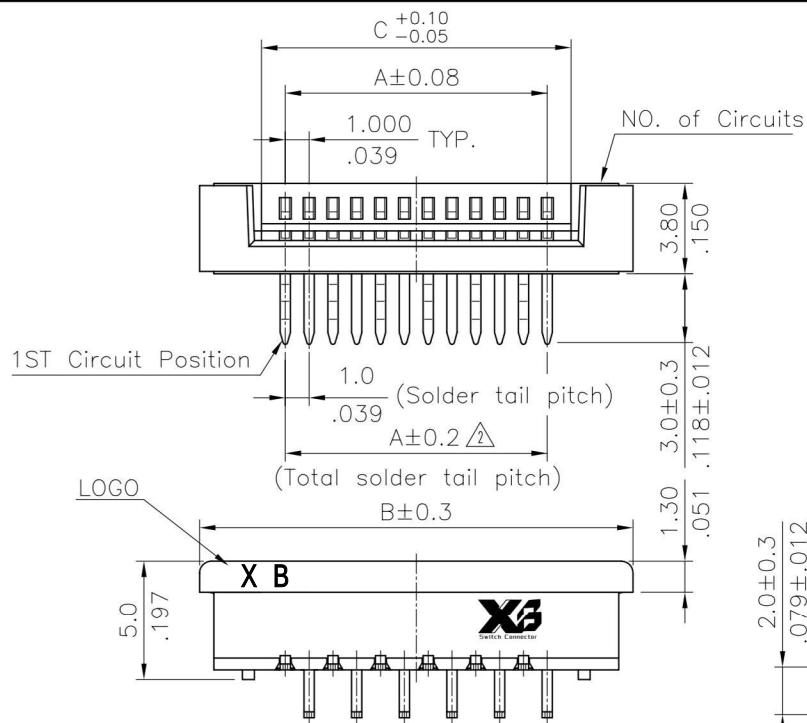


$$A = 1.00 * \text{No. of Spaces}$$




$$B = A + 7.2$$

$$\triangle C = A + 2.1$$



* Available in 4 through 32 circuits

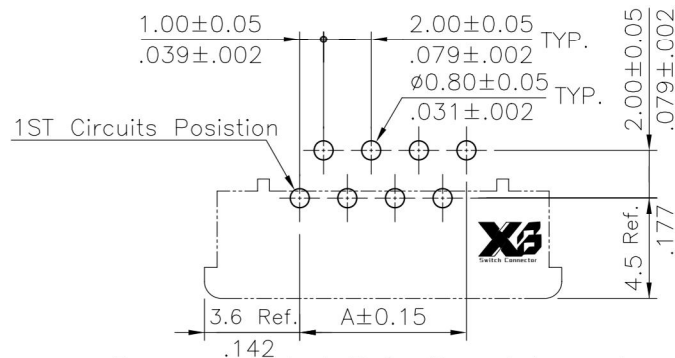


Recommended P.C. Board Layout

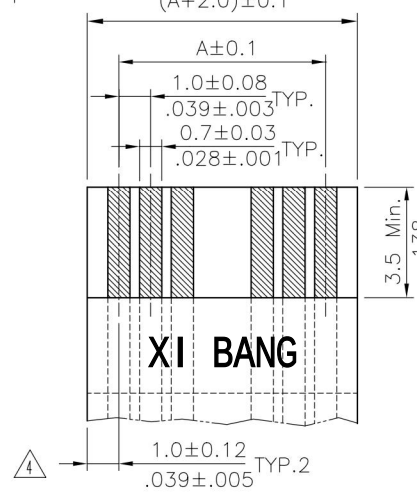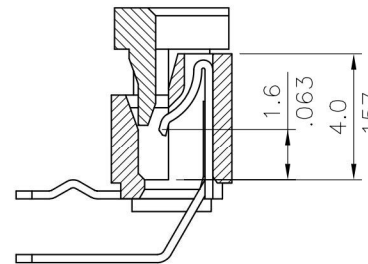

* ACCOMMODATED FFC

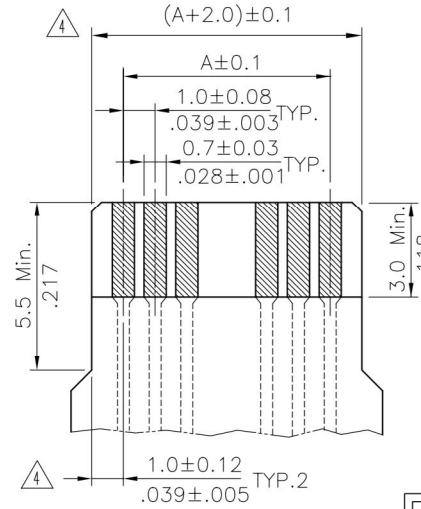

* ACCOMMODATED FPC



Material:

* Insulation: Nylon 6T UL 94V-0

Color Nature

* Slider: Nylon 6T UL 94V-0, Color Brown

* Contact: Phosphor Bronze

Ordering Code

CF10 ** 1 U 0 T 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

1 = Tin plated over Nickel

④ Contact type : U = Up side contact


⑤ Insulation Color: 0 = Nature

⑥ Packing : T = Tube Packaged

⑦ Other option: 0 = Standard


RoHS Compliant

④	Bill	3/26-08'	ECR08027-0/ECN08145			DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") R/A DIP TYPE ZIF FFC/FPC CONNECTOR (UPSIDE CONTACT)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
③	Sandy	9/22-07'	ECN07381/ECR07065-1	DRAWN BY:	Bill	4/10 08'	TOLERANCE UNLESS OTHERWISE SPECIFIED			DRAWING NO.	CF1003SG	PART NO.	CF10**1U0T0		
②	Sun	10/27/05'	ECN05368	ENGINEER:	CLARK	4/14 08'	.X ± 0.15/.006							X." ± 1"	MATERIAL:
①	Sun	8/11/05'	ECN05268	CHECKED BY:	David	4/14 08'	.XX ± 0.10/.004							X." ±	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	4/14 08'	.XXX ± 0.05/.002	X." ±		SCALE	3 / 1	SHEET 1 OF 1			



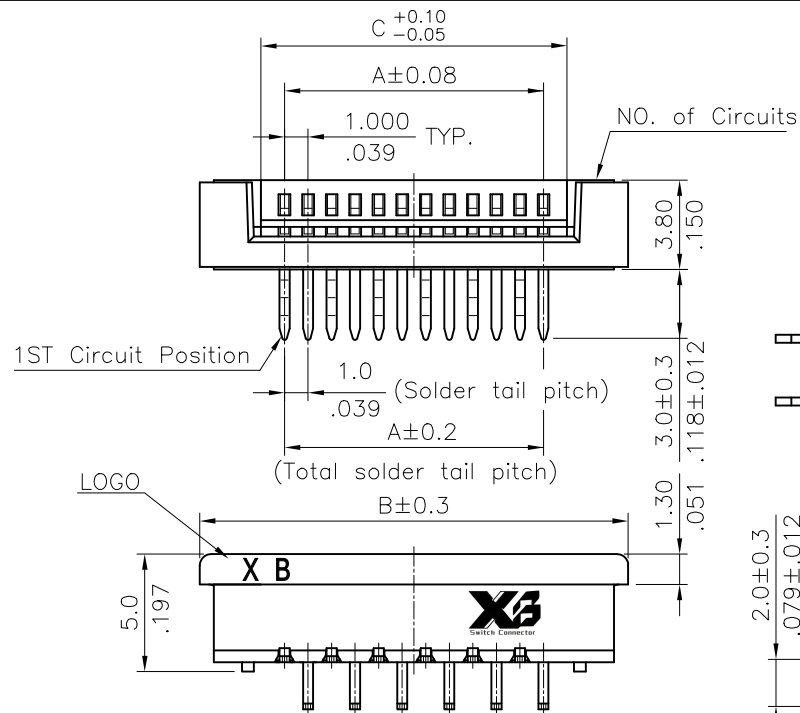


A = 1.00 * No. of Spaces
B = A + 7.2
C = A + 2.1

* Available in 4 through 32 circuits

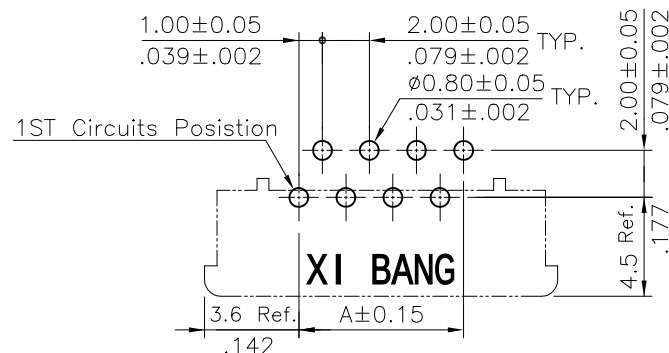

Recommended P.C. Board Layout

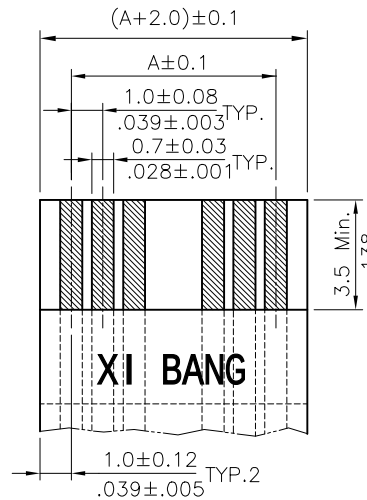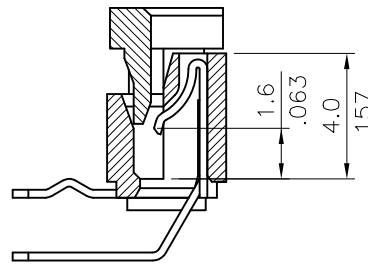

* ACCOMMODATED FFC

Notes:

- * Insulation: High temperature plastic UL 94V-0, Color Nature
- * Slider: High temperature plastic UL 94V-0, Color Black
- * Contact: Phosphor Bronze
- * For Lead Free Wave Flow Process

Ordering Code

CF10 ** 1 U 0 T 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code: 1= Matte Tin plated over Nickel


④ Contact type : U= Up side contact

⑤ Insulation Color: 0= Nature

⑥ Packing : T= Tube Packaged

⑦ Other option: 0= Standard

⑧ -NH= For Lead Free Wave Flow Process and Halogen-Free

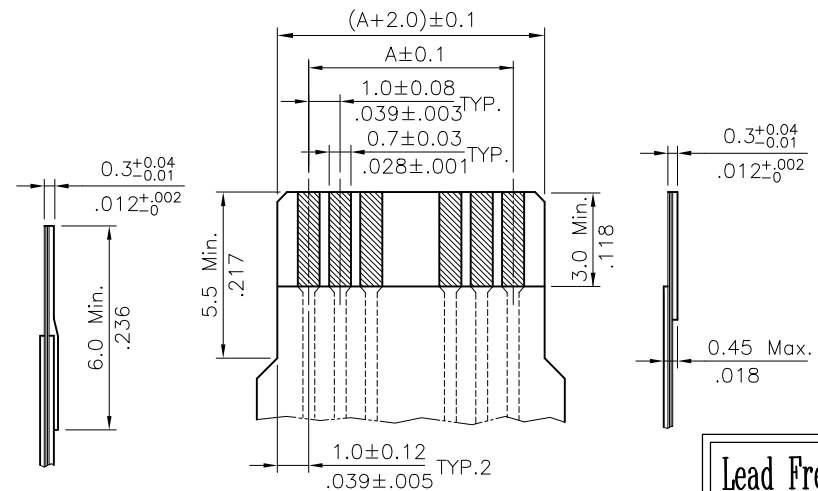

* ACCOMMODATED FPC

Lead Free Process

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") R/A DIP TYPE ZIF FFC/FPC CONNECTOR (UPSIDE CONTACT)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Karen	11/03-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
2				ENGINEER: Karen	11/03-14'	.X ± 0.15/.006	X' ± 1'				FINISH:	
1				CHECKED BY: Eisley	11/03-14'	.XX ± 0.10/.004	.X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	11/03-14'	.XXX ± 0.05/.002	.XX' ±		DRAWING NO. CF1043SA	PART NO. CF10**1U0T0-NH	SCALE 3 / 1	SHEET 1 OF 1

