



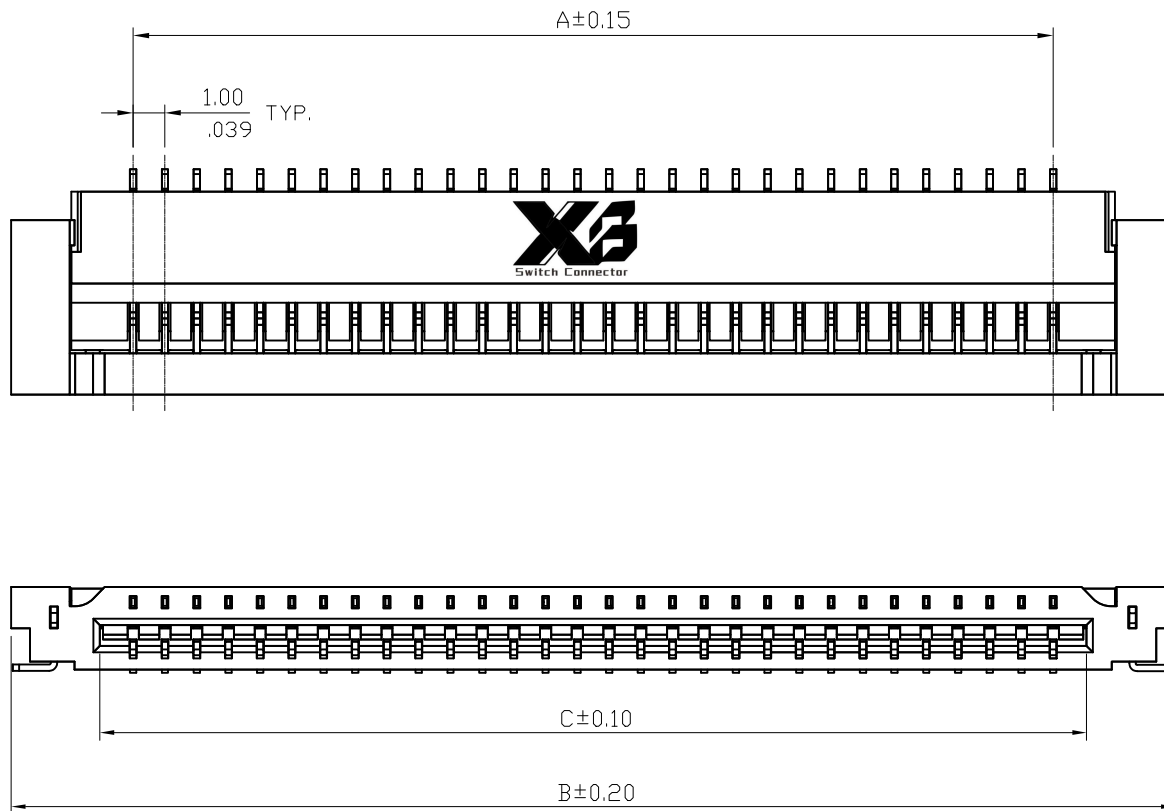


$$A = 1.00 * \text{No. of Spaces}$$

$$B = A + 7.7$$

$$C = A + 2.1$$

$\triangle 3$ * Available 8,10,18,24,30 circuits


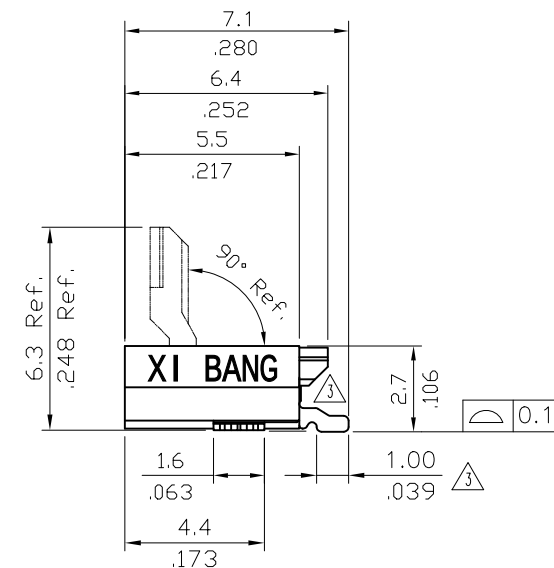
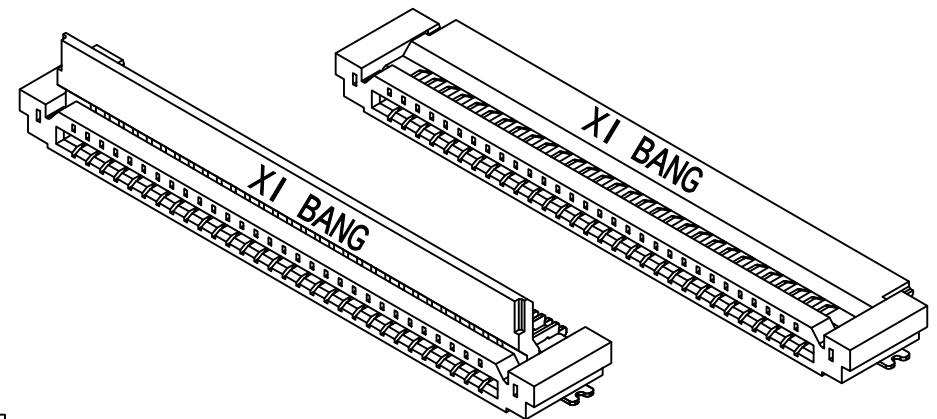


Lead Free Process

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3	Karen	3/31-18'	ECNT118056	DRAWN BY:	Karen	4/2-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2	Enya	4/2-14'	ECNT114047/ECRB114009	ENGINEER:	Sun	4/09-18'	.X ± 0.20/.008 X' ± 1'	MATERIAL:			
1	Clark	12/15-11	ECN11274	CHECKED BY:	Eisley	4/11-18'	.XX ± 0.10/.004 X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/11-18'	.XXX ± 0.05/.002 X' ±	FINISH:			
DRAWING NO.	CF1105SC	PART NO.	CF11**2D0*A-10-NH	SCALE	4 / 1	SHEET	1 OF 3				

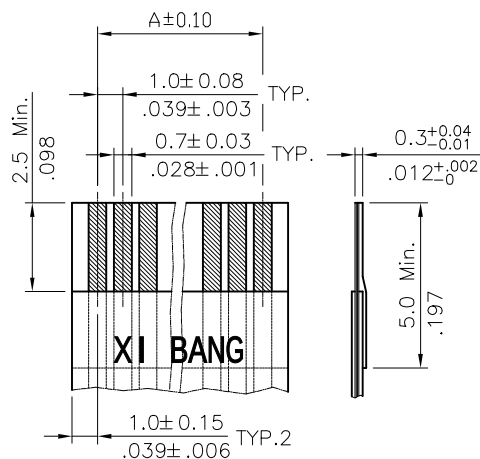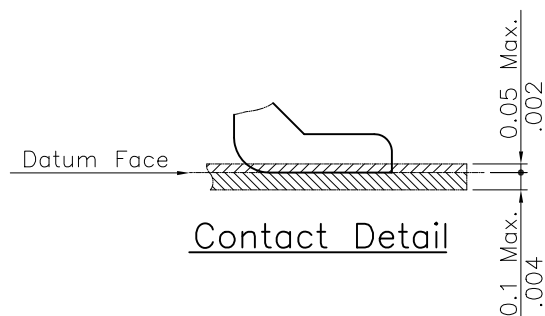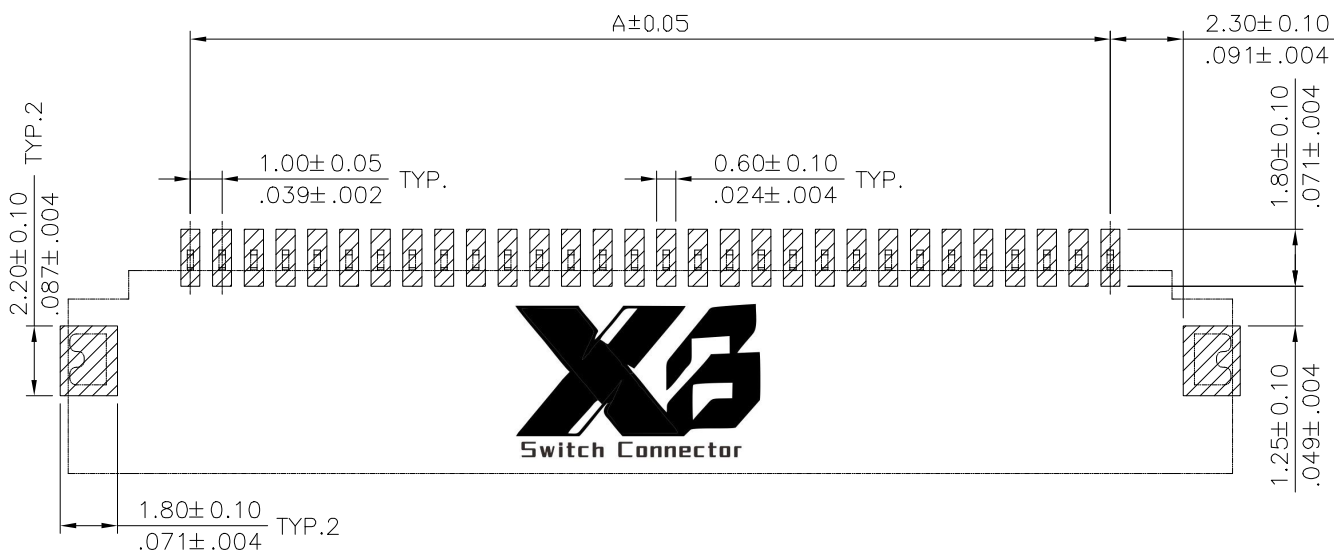

Accommodated FFC/FPC

Material :

- * Body : High temperature plastic UL 94V-0
Color Nature
- * Cover : High temperature plastic UL 94V-0
Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Tin Plated

Ordering Code

CF11 30 2 D 0 * A - 10 - NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No.
- ② No. of Circuits: 8,10,18,24,30 Pin
- ③ Plating code:
2= Gold flash over Nickel
- ④ Contact style: D= Downside contact
- ⑤ Color: 0= Nature
- ⑥ Other option: R= Tape & Reel
T= Tube Packing
- ⑦ A= Special type
- ⑧ 10= Pitch 1.00mm
- ⑨ NH= For Leadfree IR Processes
and Halogen-Free

Lead Free Process

Halogen-Free

RoHS Compliant



4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3	Karen	3/31-18'	ECNT118056	DRAWN BY:	Karen	4/2-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2	Enya	4/2-14'	ECNT114047/ECRB114009	ENGINEER:	Sun	4/09-18'	.X ± 0.20/.008	X' ± 1"	MATERIAL:	
1	Clark	12/15-11	ECN11274	CHECKED BY:	Eisley	4/11-18'	.XX ± 0.10/.004	X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/11-18'	.XXX ± 0.05/.002	.XX' ±		DRAWING NO. CF1105SC PART NO. CF11**2D0*A-10-NH
										SCALE 4 / 1 SHEET 2 OF 3

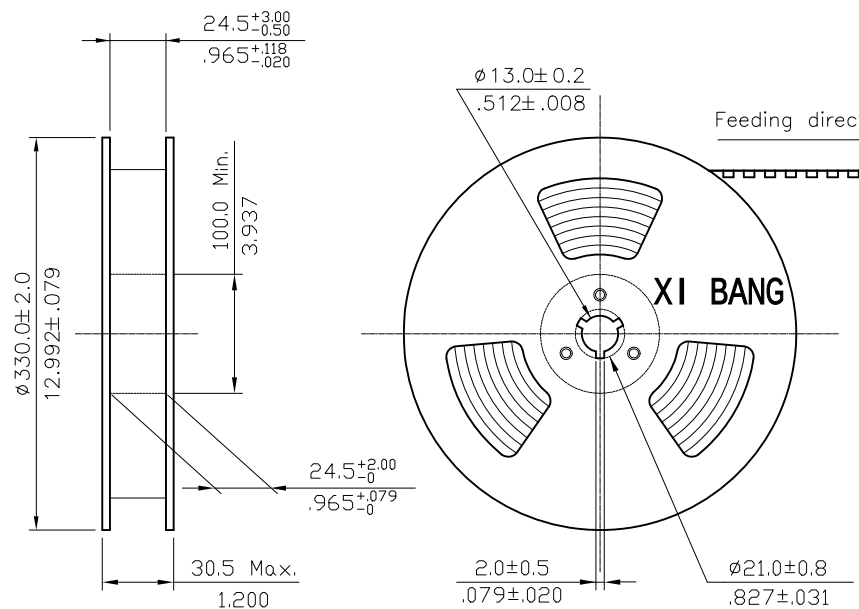

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
30	56.0(2.204)	52.50(2.067)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

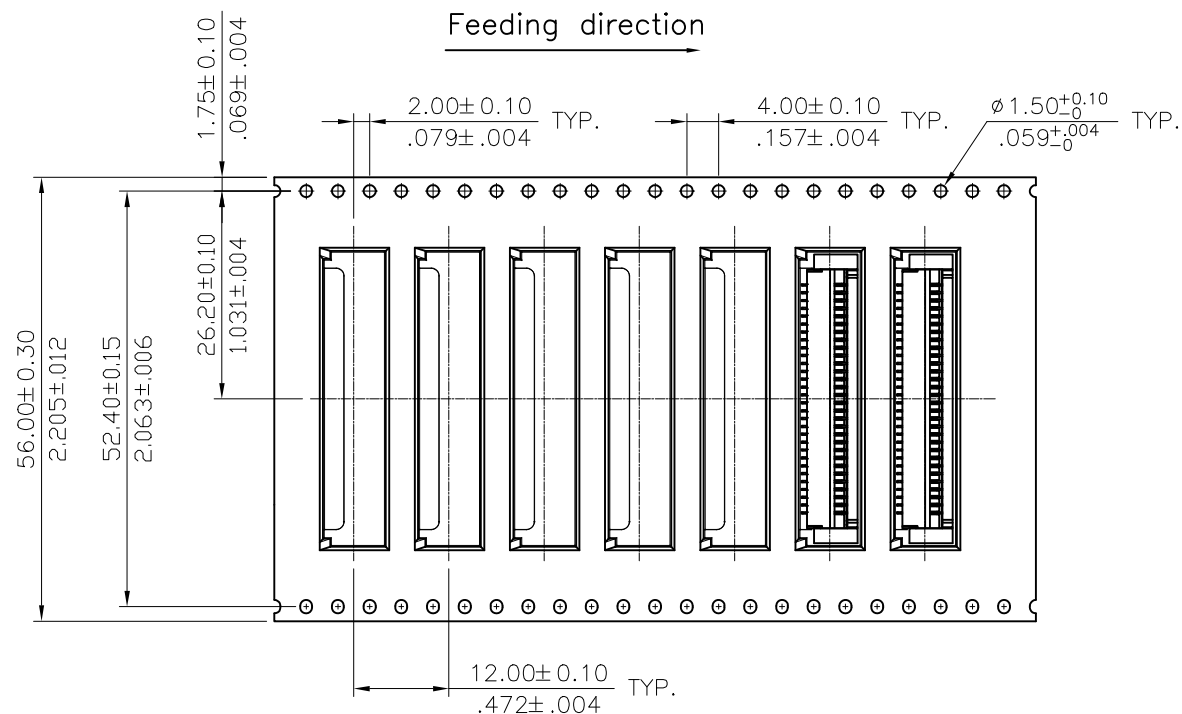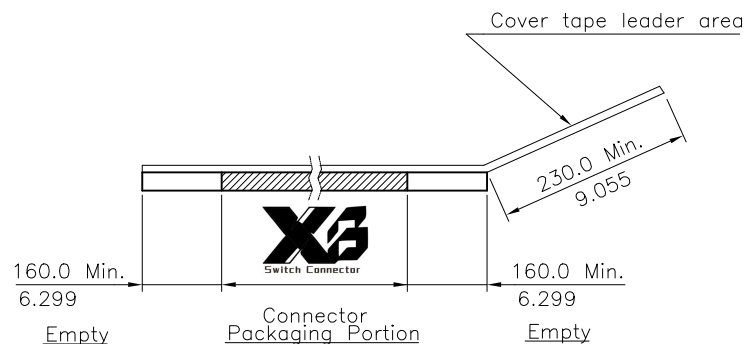

WIDTH : 56 mm Carrier

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3	Karen	3/31-18'	ECNT118056	DRAWN BY:	Karen	4/2-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2	Enya	4/2-14'	ECNT114047/ECRB114009	ENGINEER:	Sun	4/09-18'	.X ±	X' ± 1'	MATERIAL:		DRAWING NO.	CF1105SC	PART NO.	CF11**2D0*A-10-NH
1	Clark	12/15-11	ECN11274	CHECKED BY:	Eisley	4/11-18'	.XX ±	.X' ±	FINISH:		SCALE		SHEET	3 OF 3
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/11-18'	.XXX ±	.XX' ±						