

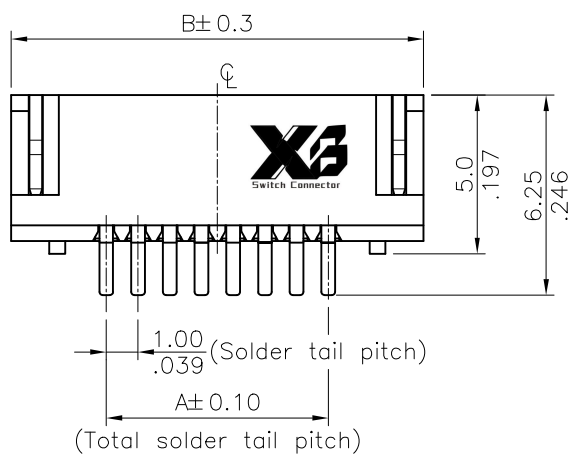


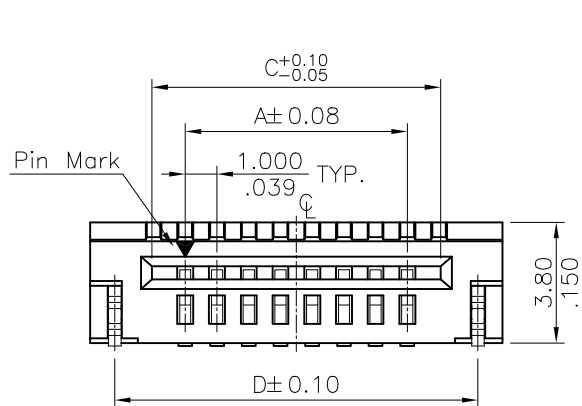


$A = 1.00 * \text{NO. OF SPACES}$
 $B = A + 6.0$
 $C = A + 2.1$
 $D = A + 4.45$

* AVAILABLE IN 3 THROUGH 32 CIRCUITS

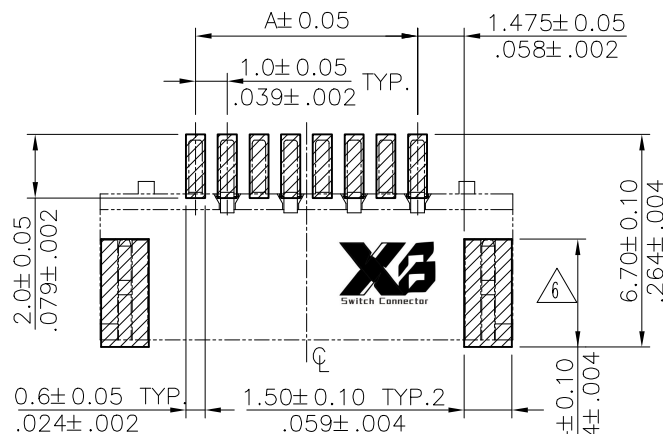

Sold Pad Pattern

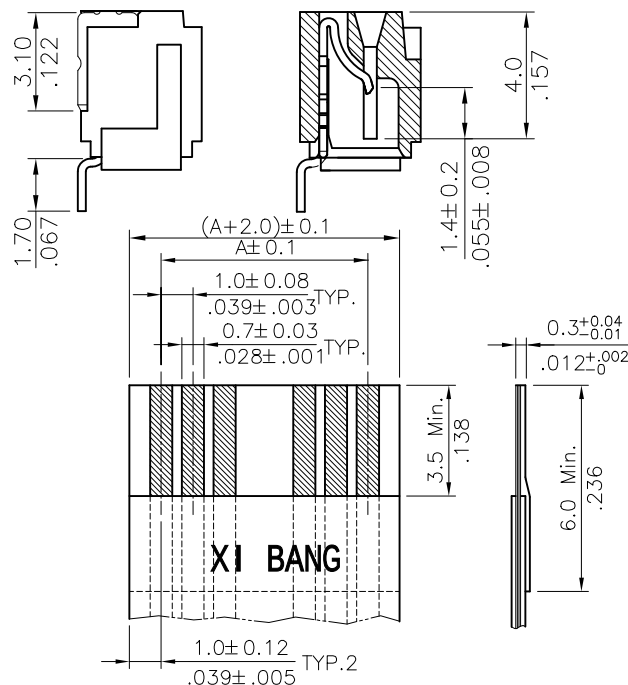

* ACCOMMODATED FFC

Material:

* Insulation:

High Temperature Polyamide UL 94V-0
Color Nature

* Contact: Phosphor Bronze

Ordering Code

CF16 ** 1 S 0 R 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

1 = Matte Tin plated over Nickel


④ Contact type : S = Side entry SMT type

⑤ Insulation Color: 0 = Nature

⑥ Packing : T = Tube Packaged

R = Tape & reel packaged


⑦ Other option: 0 = Standard

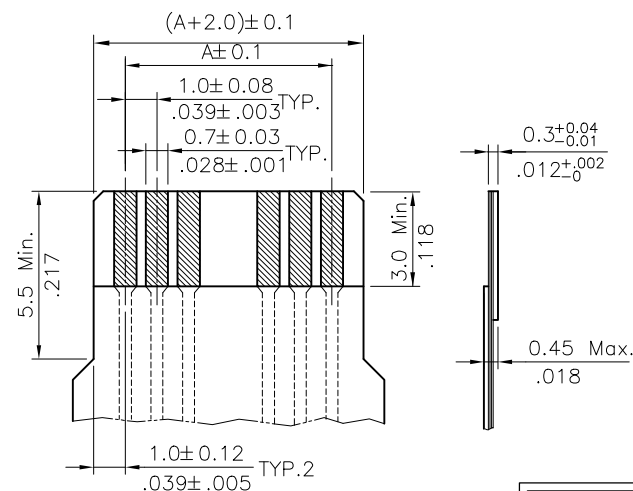

* ACCOMMODATED FPC

RoHS Compliant



⑥	Karen	5/09-17'	ECNT117070/ECRT117004		DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") SIDE ENTRY SMT TYPE LIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
⑤	Sun	6/13-11'	ECR11022-1/ECN11127	DRAWN BY:	Karen	5/9-17'						TOLERANCE UNLESS OTHERWISE SPECIFIED			
④	Sun	4/02-09'	ECR09024-2/ECN09165	ENGINEER:	Sun	5/10-17'	MATERIAL:	DRAWING NO.					CF1638SG	PART NO.	CF16**1S0T0 CF16**1S0R0
③	Hank	6/13/08"	ECN08280	CHECKED BY:	Eisley	5/10-17'						.X ± 0.20/.008			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	5/10-17'	.XX ± 0.15/.006	X' ±							
							.XXX ± 0.10/.004	.XX ±							

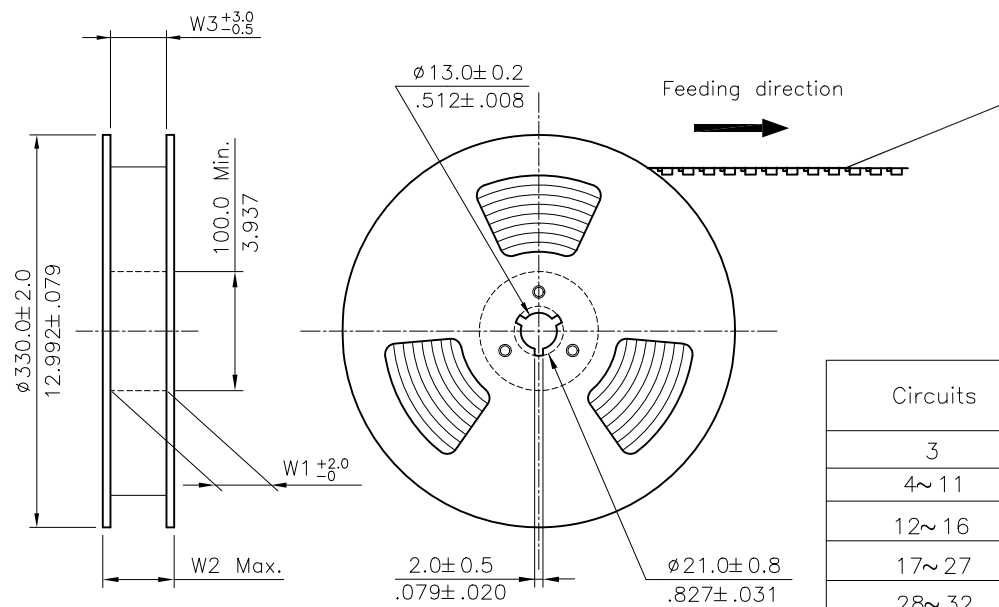

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 1200 PCS/Reel



Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
3	16.0(.630)	---	16.5(.650)	22.5(.886)	16.5(.650)	11
4~ 11	24.0(.945)	---	24.5(.965)	30.5(1.201)	24.5(.965)	9
12~ 16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17~ 27	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
28~ 32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

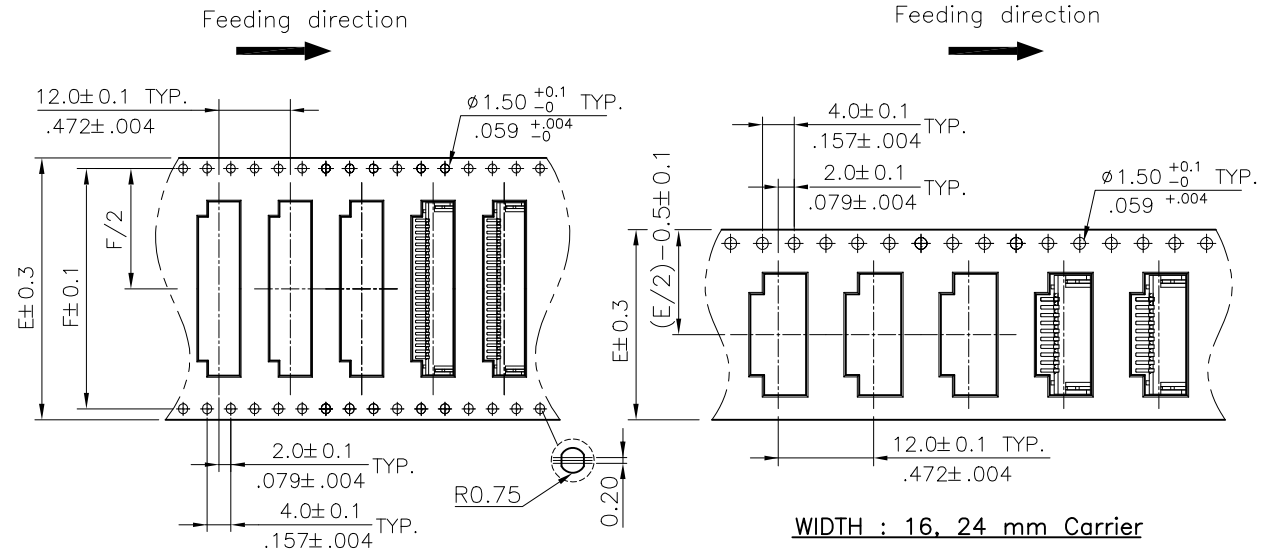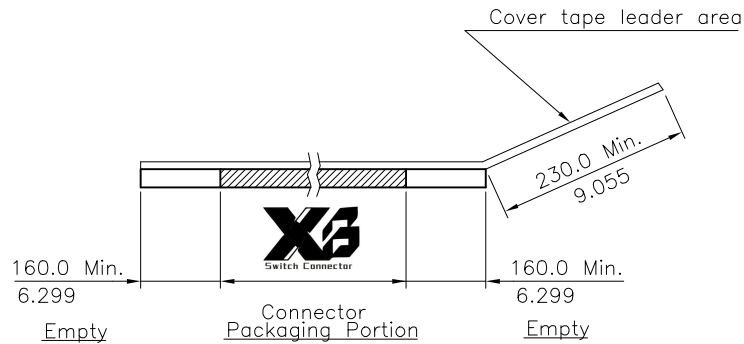

WIDTH : 32, 44 & 56 mm Carrier


RoHS Compliant

6	Karen	5/09-17'	ECNT117070/ECRT117004		DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") SIDE ENTRY SMT TYPE LIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
5	Sun	6/13-11'	ECR11022-1/ECN11127	DRAWN BY:	Karen	5/9-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
4	Sun	4/02-09'	ECR09024-2/ECN09165	ENGINEER:	Sun	5/10-17'	.X ±	MATERIAL:			
3	Hank	6/13/08"	ECN08280	CHECKED BY:	Eisley	5/10-17'	.XX ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	5/10-17'	.XXX ±	FINISH:			
								DRAWING NO.	CF1638SG	PART NO.	CF16**1S0T0 CF16**1S0R0
								SCALE		SHEET	2 OF 2

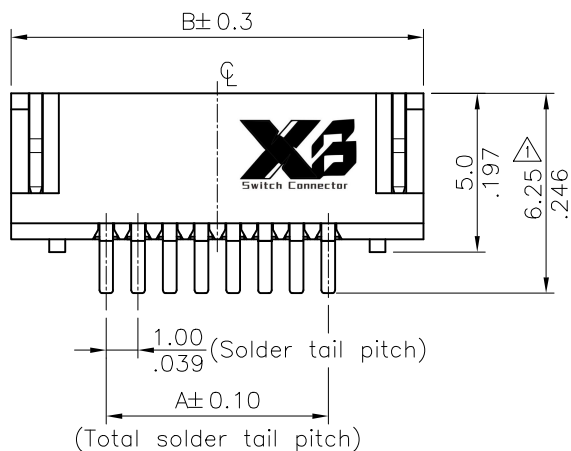
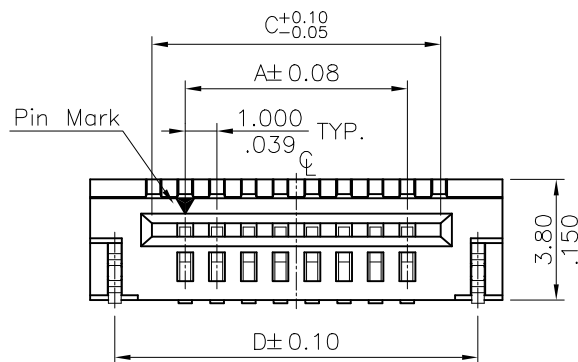


A = 1.00 * NO. OF SPACES
 B = A + 6.0
 C = A + 2.1
 D = A + 4.45


* AVAILABLE IN 3 THROUGH 32
 CIRCUITS

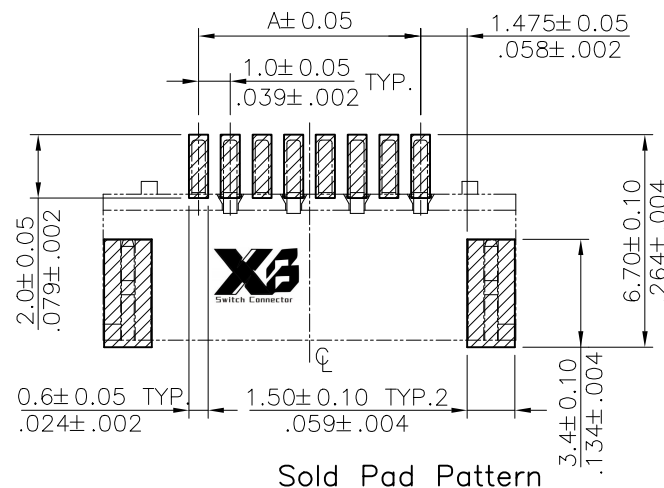

Sold Pad Pattern

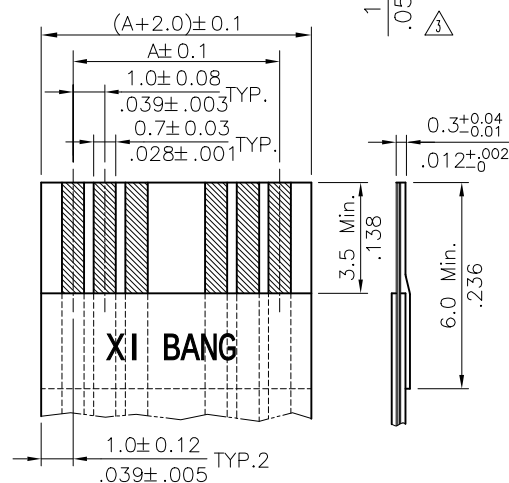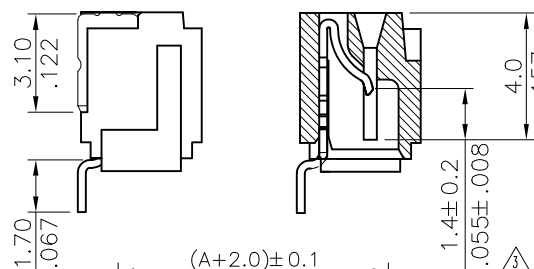

* ACCOMMODATED FFC

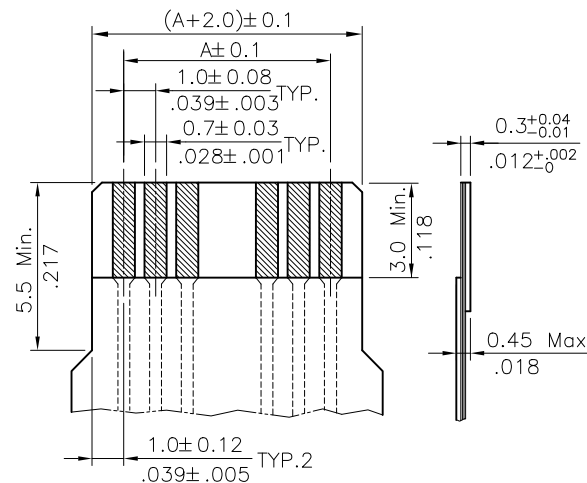

* ACCOMMODATED FPC

Material:

* Insulation:

High Temperature Polyamide UL 94V-0

Color Nature

* Contact: Phosphor Bronze

Ordering Code

CF16 ** 1 S 0 R 0 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1= Matte Tin plated over Nickel

④ Contact type : S= Side entry SMT type

⑤ Insulation Color: 0= Nature

⑥ Packing : T= Tube Packaged

R= Tape & reel packaged

⑦ Option: 0= Standard

⑧ Other option:


NH= For Lead Free IR Processes
 and Halogen-Free

Halogen-Free

Lead Free Process

RoHS Compliant



4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") SIDE ENTRY SMT TYPE LIF FFC/FPC CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3	Ken	6/12-17	ECNT117070/ECRT117004	DRAWN BY:	Ken	6/12-17	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2	Sun	6/13-11	ECR11022-1/ECN11127	ENGINEER:	Sun	6/13-17	.X ± 0.20/.008	X: ± 1"	MATERIAL:		
1	Sun	4/02-09	ECR09024-2/ECN09165	CHECKED BY:	Eisley	6/19-17	.XX ± 0.15/.006	.X ±	FINISH:		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/19-17	.XXX ± 0.10/.004	.XX ±		DRAWING NO. CF1654SD	PART NO. CF16**1S0*0-NH
										SCALE 4 / 1	SHEET 1 OF 2

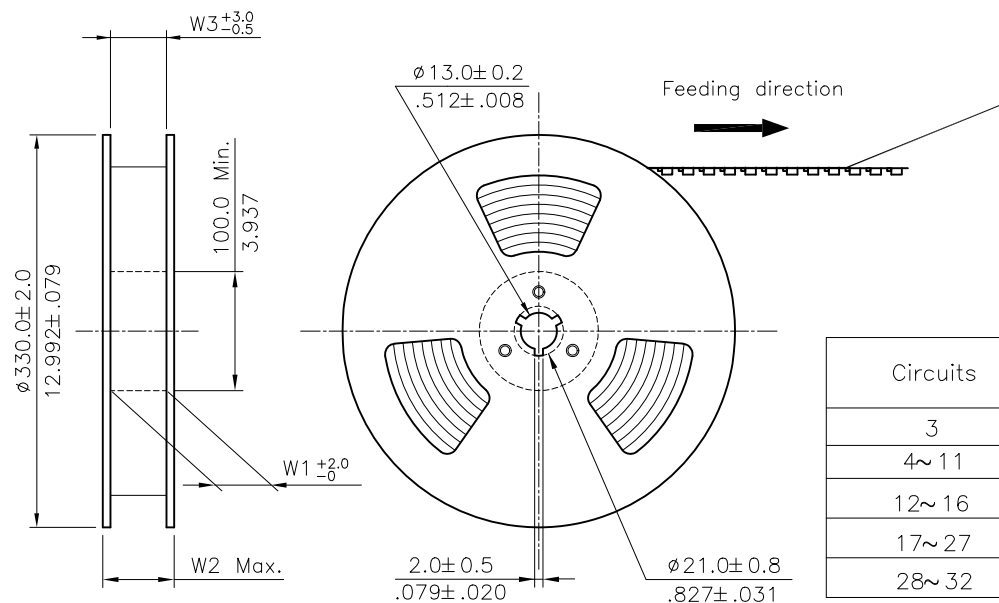

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
3	16.0(.630)	---	16.5(.650)	22.5(.886)	16.5(.650)	11
4~11	24.0(.945)	---	24.5(.965)	30.5(1.201)	24.5(.965)	9
12~16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17~27	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
28~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

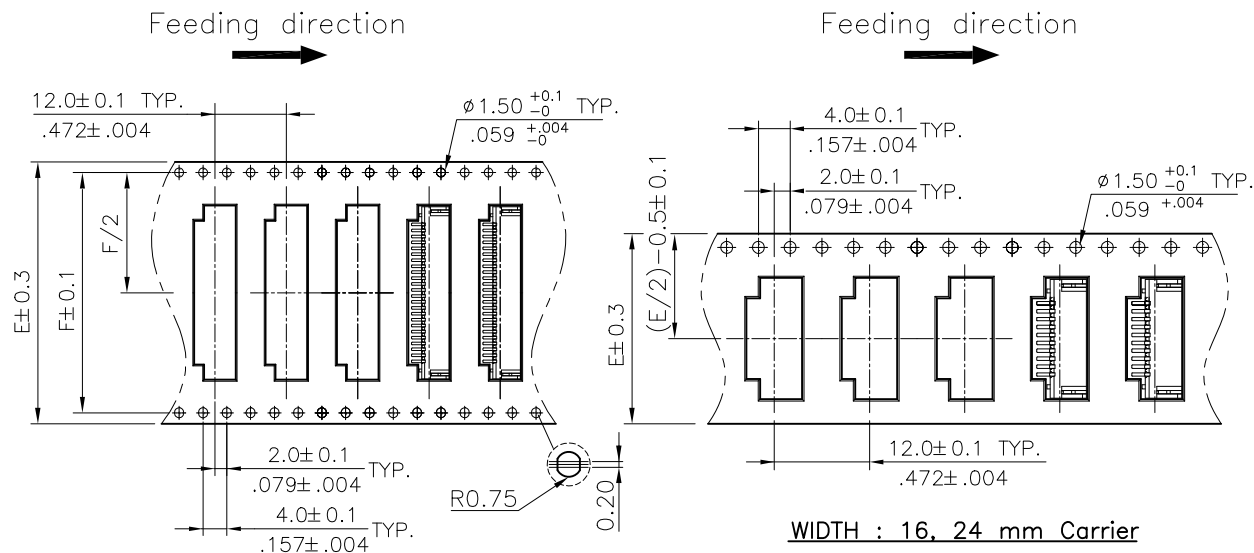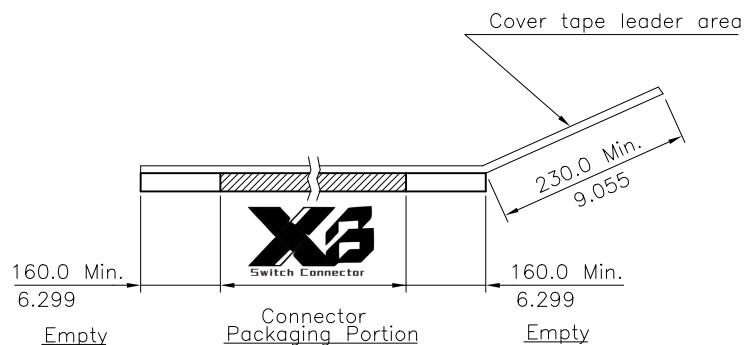

WIDTH : 32, 44 & 56 mm Carrier

WIDTH : 16, 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") SIDE ENTRY SMT TYPE LIF FFC/FPC CONNECTOR	MATERIAL:	FINISH:	DRAWING NO.	PART NO.	SHEET 2 OF 2
3	Ken	6/12-17'	ECNT117070/ECRT117004	DRAWN BY:	Ken	6/12-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Sun	6/13-11'	ECR11022-1/ECN11127	ENGINEER:	Sun	6/13-17'						
1	Sun	4/02-09'	ECR09024-2/ECN09165	CHECKED BY:	Eisley	6/19-17'						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/19-17'						

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.