

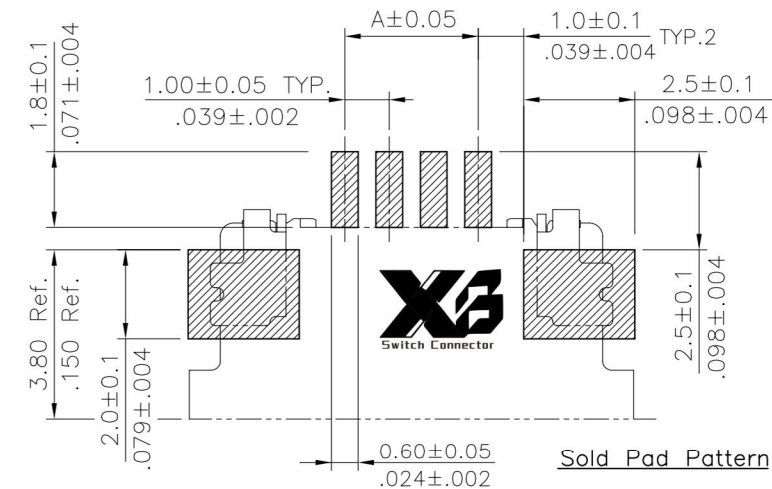
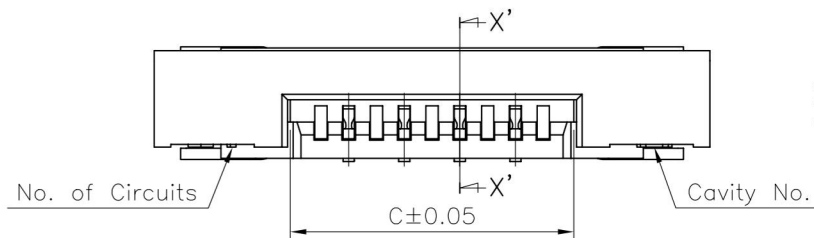


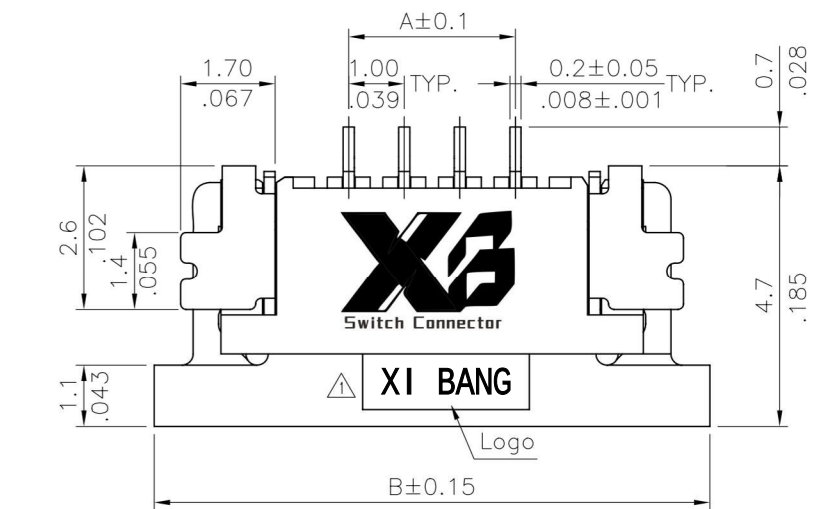

Ordering Code

CF20 ** 1 D 0 ** -10 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
1 = 3.05μm(120μ") Min. Matte Tin
over 0.76μm(30μ") Nickel
- ④ Contact style: D = Downside contact
- ⑤ Color: 0 = Nature
- ⑥ Other option: R0 = Tape & Reel
T0 = Tube Packing
- ⑦ Pitch: 10 = 1.00 mm
- ⑧ Other option:
NH = For Lead Free IR Processes
and Halogen-Free

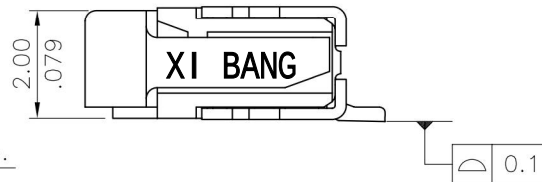


A = 1.0 * No. of Spaces

B = A + 7.0


C = A + 2.1

* Available in 2 through 27 circuits

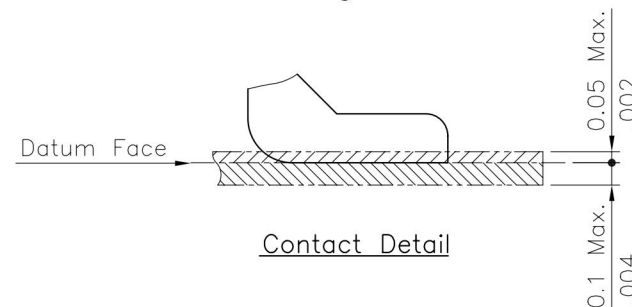


Material :

- * Body : High temperature plastic UL 94V-0
Color Nature(Ivory)
- * Slider : High temperature plastic UL 94V-0
Color Black
- * Contact : Copper alloy with Matte Tin plated
- * Fixed tab : Copper alloy with Matte Tin plated

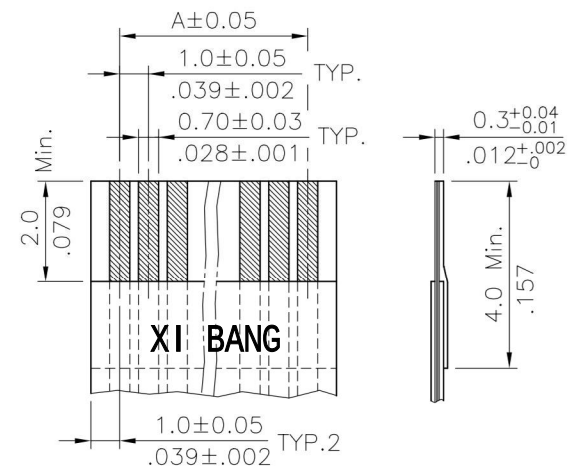

Accommodated FFC/FPC

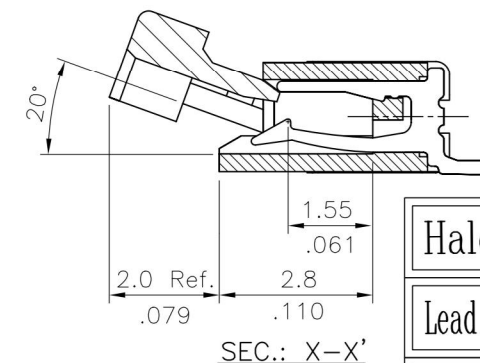


Halogen-Free

Lead Free Process

RoHS Compliant



④						DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") ZIF FFC/FPC DOWNSIDE CONTACT SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY:	Karen	9/29-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
②				ENGINEER:	Eisley	10/5-09'	.X ± 0.15/.006	X.* ± 1"					
①	Karen	8/25-09'	ECN09413/ECR09116-0	CHECKED BY:	David	10/5-09'	.XX ± 0.10/.004	.X.* ±	FINISH:		DRAWING NO.	CF2006AB	PART NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/5-09'	.XXX ± 0.05/.002	.XX.* ±		SCALE	7 / 1	SHEET	1 OF 2

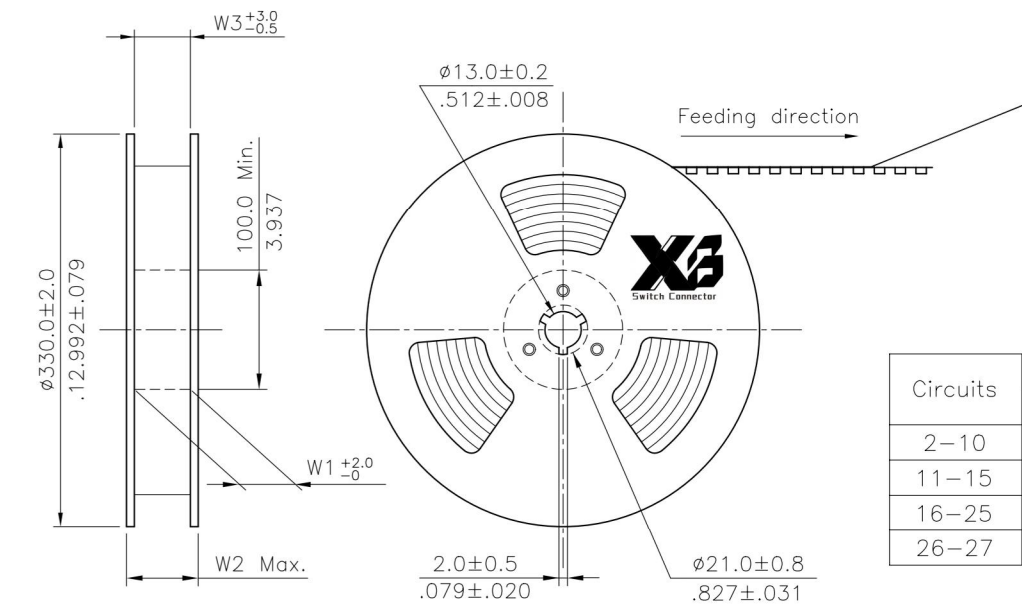


NOTE :

- * Reel Material : HIPS
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N — 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 2000 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
2-10	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
11-15	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16-25	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
26-27	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

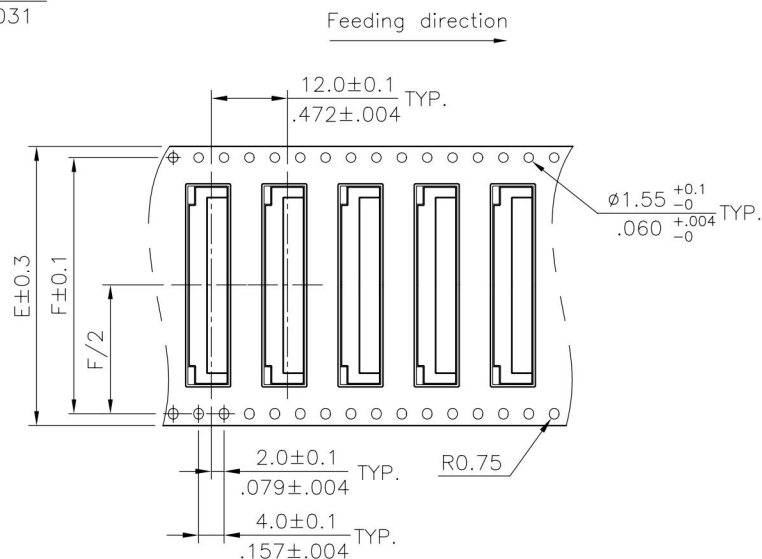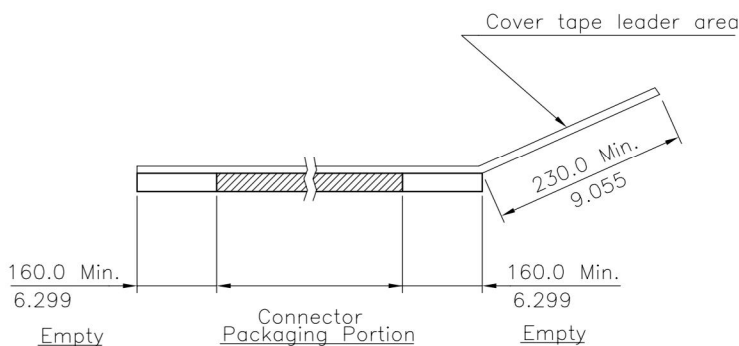

WIDTH : 32,44,56 mm Carrier

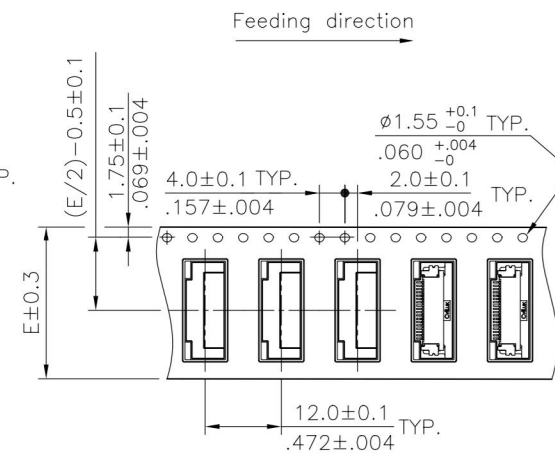

WIDTH : 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") ZIF FFC/FPC DOWNSIDE CONTACT SURFACE MOUNT CONNECTOR	Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Karen	9/29-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	Eisley	10/5-09'	.X ±			X' ± 1'		
1	Karen	8/25-09'	ECN09413/ECR09116-0	CHECKED BY:	David	10/5-09'	.XX ±			.X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/5-09'	.XXX ±	.XX' ±	MATERIAL:			
									FINISH:			
									DRAWING NO.	CF2006AB	PART NO.	CF20**1D0**-10-NH
									SCALE		SHEET	2 OF 2