

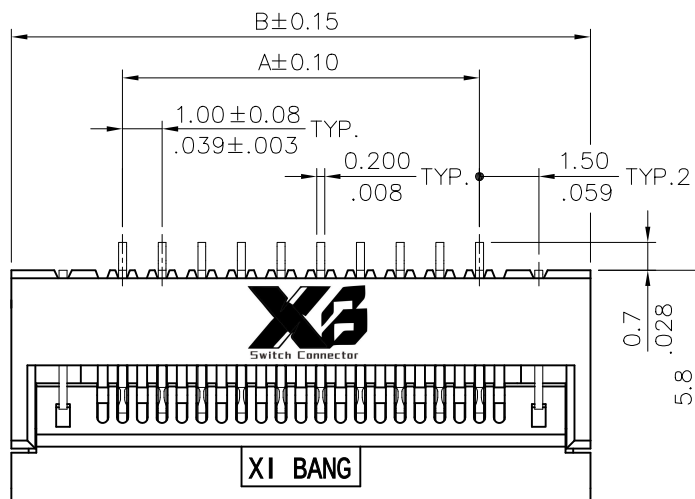
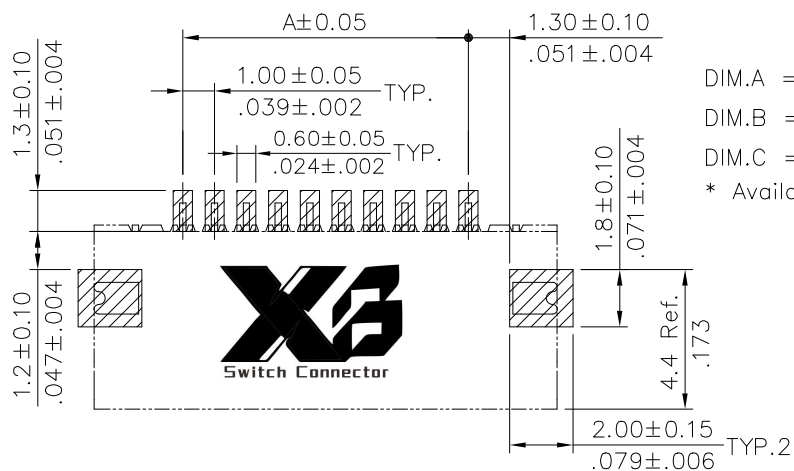


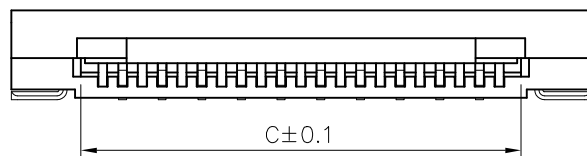


Material :

- * Body : Nylon 6T With 30% GF. UL 94V-0, Color Nature
- * Slider : Nylon 6T With 30% GF. UL 94V-0, Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Tin Plated

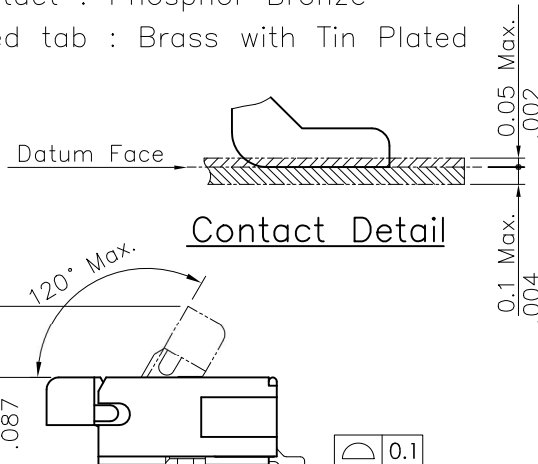

DIM.A = 1.00 x No. of Spaces
 DIM.B = DIM.A + 5.6
 DIM.C = DIM.A + 2.1
 * Available in 4 through 39 circuits

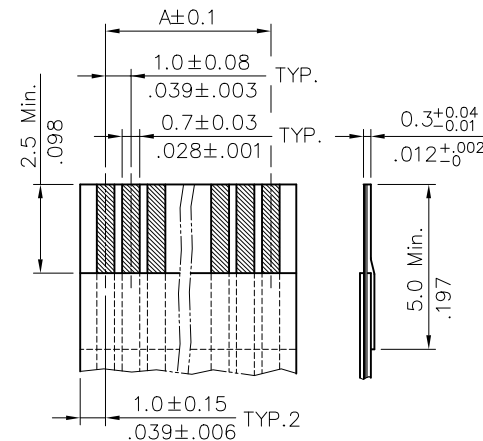


Accommodated FFC/FPC

Ordering Code

CF25 ** F D 0 *0 - 10 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
F = Selective Gold flash plated over Nickel
- ④ Contact style: D = Downside contact
- ⑤ Color: 0 = Nature
- ⑥ Other option: R0 = Tape & Reel
T0 = Tube Packing
- ⑦ Pitch: 10 = 1.00 mm
- ⑧ -NH = For Lead Free IR Processes and Halogen-Free

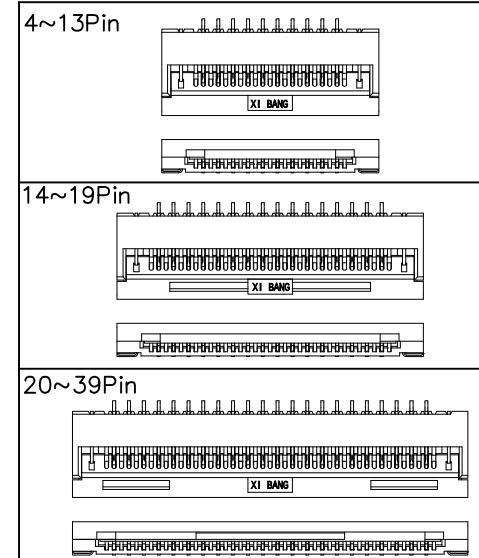


Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS compliant




④						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
③				DRAWN BY:	Sandy	3/08-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CF2592SC	PART NO.
②	Sandy	3/8-16'	ECNT116028/ECRB116002	ENGINEER:	Sun	3/09-16'	.X ± 0.15/.006	X' ± 1"	FINISH:			SCALE	5 / 1	SHEET
①	Enya	11/06-12'	ECN12272-0/ECR12080-1	CHECKED BY:	Eisley	3/14-16'	.XX ± 0.10/.004	X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/14-16'	.XXX ± 0.05/.002	.XX' ±						

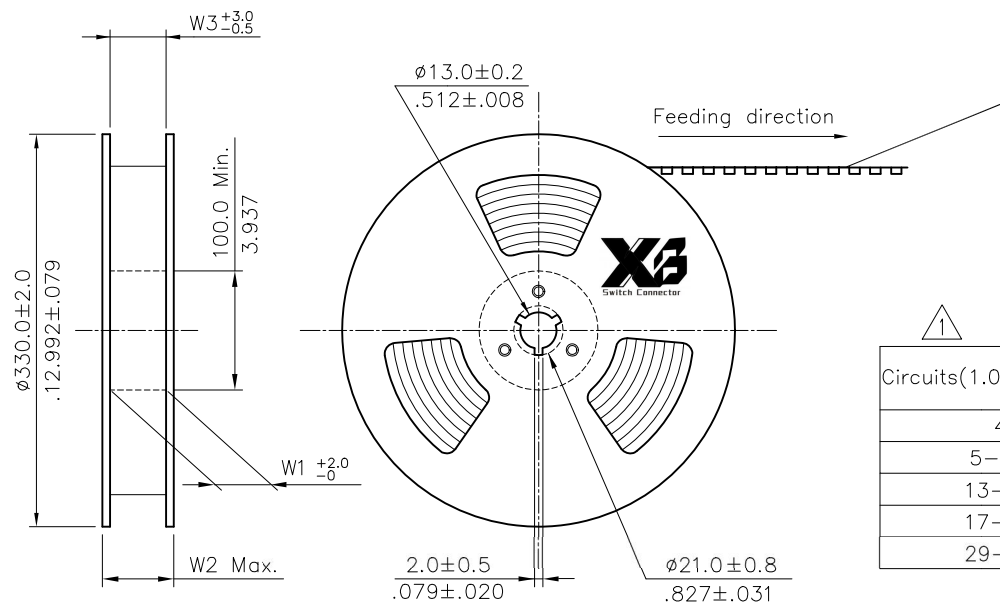

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20
2. Carrier camber is within 1 mm in 250 mm.
3. Material :Transparent Anti-static Polysyrene.
4. All dimensions meet EIA-481-2 requirements.
5. Thickness : 0.35 ± 0.05 mm.
6. Packing length per 22" Reel : 56 Meters.
7. Component load per 13" Reel : 2000 pcs.

Circuits(1.0mm Pitch)	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
5-12	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
13-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-28	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
29-39	56.0(2.204)	52.50(2.067)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

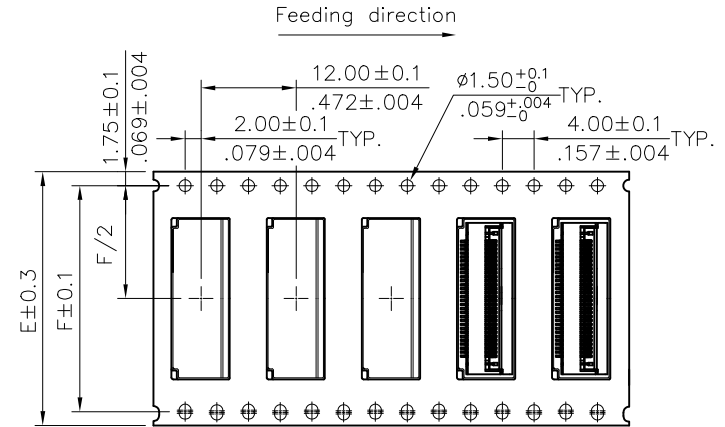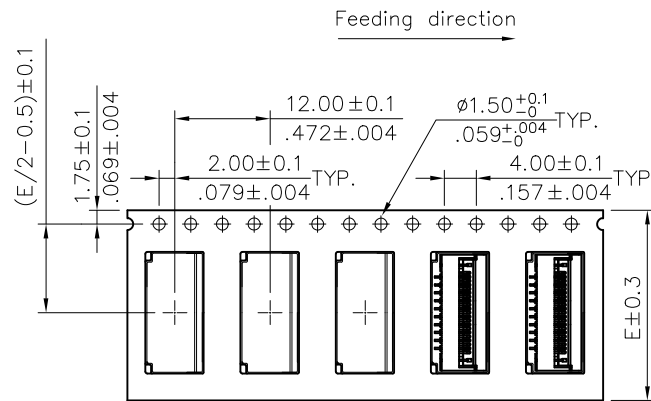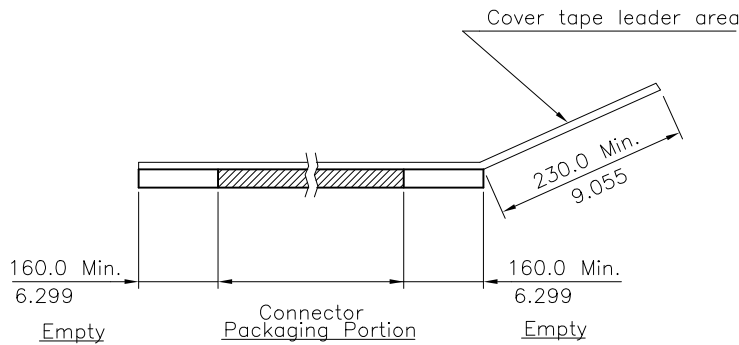

WIDTH : 32,44,56 mm Carrier

WIDTH : 16,24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
3				DRAWN BY: Sandy	3/08-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Sandy	3/8-16'	ECNT116028/ECRB116002	ENGINEER: Sun	3/09-16'	.X ±	MATERIAL:	DRAWING NO. CF2592SC	PART NO. CF25**FD0*0-10-NH	SHEET 2 OF 2	
1	Enya	11/06-12'	ECN12272-0/ECR12080-1	CHECKED BY: Eisley	3/14-16'	.XX ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/14-16'	.XXX ±	FINISH:	SCALE			