

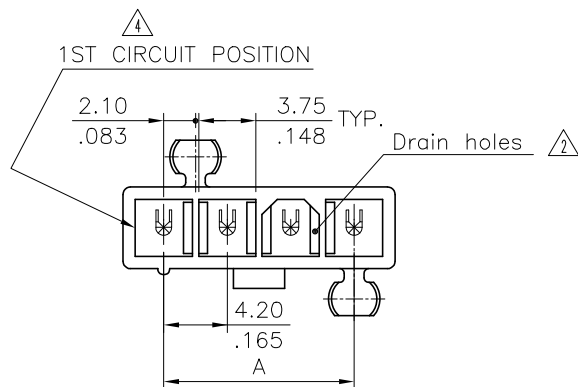


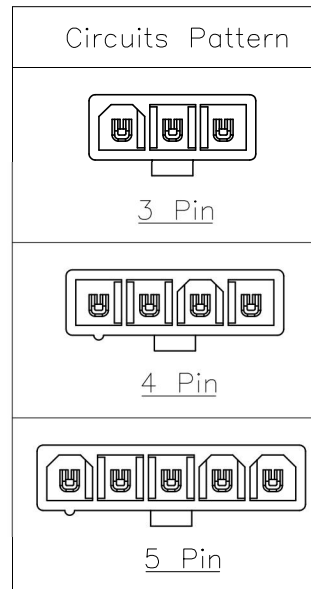

Material:

- * Insulation: Nylon 66, Color Nature
- * Contact: Brass

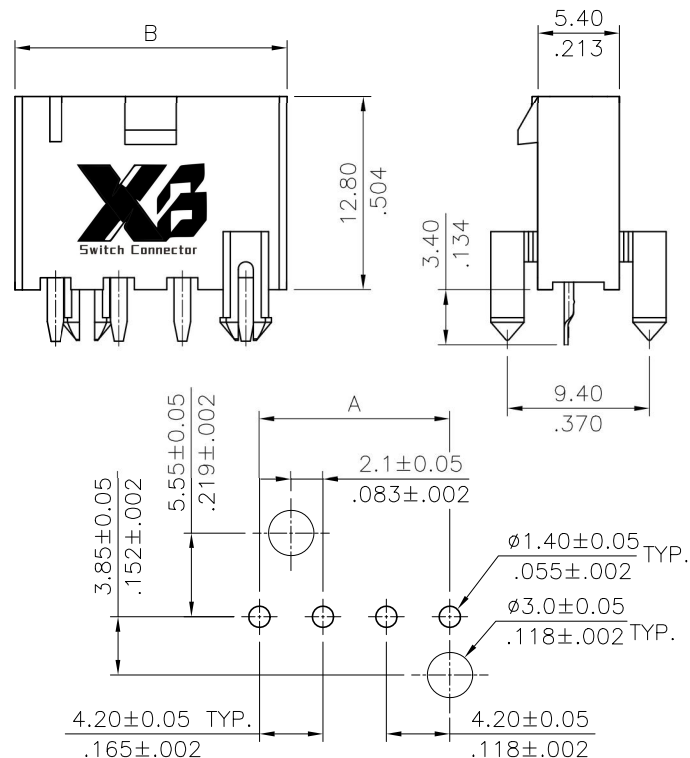

Ordering Code:

CP-01 3 ** * * S
① ② ③ ④ ⑤ ⑥

① Series No.

② Type of Connector:

3= Straight PCB mount header

③ No of Circuits:

④ Plating Code:

1= 2.54μm(100μ") Tin over 1.02μm(40μ") Nickel

2= Gold flash plated over 1.27μm(50μ") Nickel

A= Selective Gold flash plated over 1.27μm(50μ") Nickel

B= Selective 0.38μm(15μ") gold plated over 1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") gold plated over 1.27μm(50μ") Nickel

⑤ Variation:

4= UL 94V-2, With mounting pegs
With Drain holes

5= UL 94V-0, With mounting pegs
With Drain holes

8= UL 94V-2, With mounting pegs
Without Drain holes

9= UL 94V-0, With mounting pegs
Without Drain holes

⑥ S= Single Row Header

Circuits	Dimension	
	A	B
3	8.4(.331)	13.8(.543)
4	12.6(.496)	18.0(.709)
5	16.8(.661)	22.2(.874)

Tin-Lead Process

RoHS Compliant

Recommended P.C. Board Layout

⑤	Una	11/25-10'	ECN10382		DATE	UNIT: mm / inch	TITLE: STRAIGHT HEADER	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
④	Sandy	9/19-08'	ECN08463	DRAWN BY: Una	11/25-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CP-01 POWER CONNECTOR				
③	Sandy	5/12-08'	ECN08219	ENGINEER: Clark	11/30-10'	.X ± 0.38/.015 X* ± r	MATERIAL:				
②	Hank	1/14 08'	ECN08022	CHECKED BY: David	11/30-10'	.XX ± 0.25/.010 X* ±	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	11/30-10'	.XXX ± 0.10/.004 X* ±					
								DRAWING NO.	CP0160AF	PART NO.	CP-013****S
								SCALE	3 / 1	SHEET	1 OF 1