


Materials:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0303S*

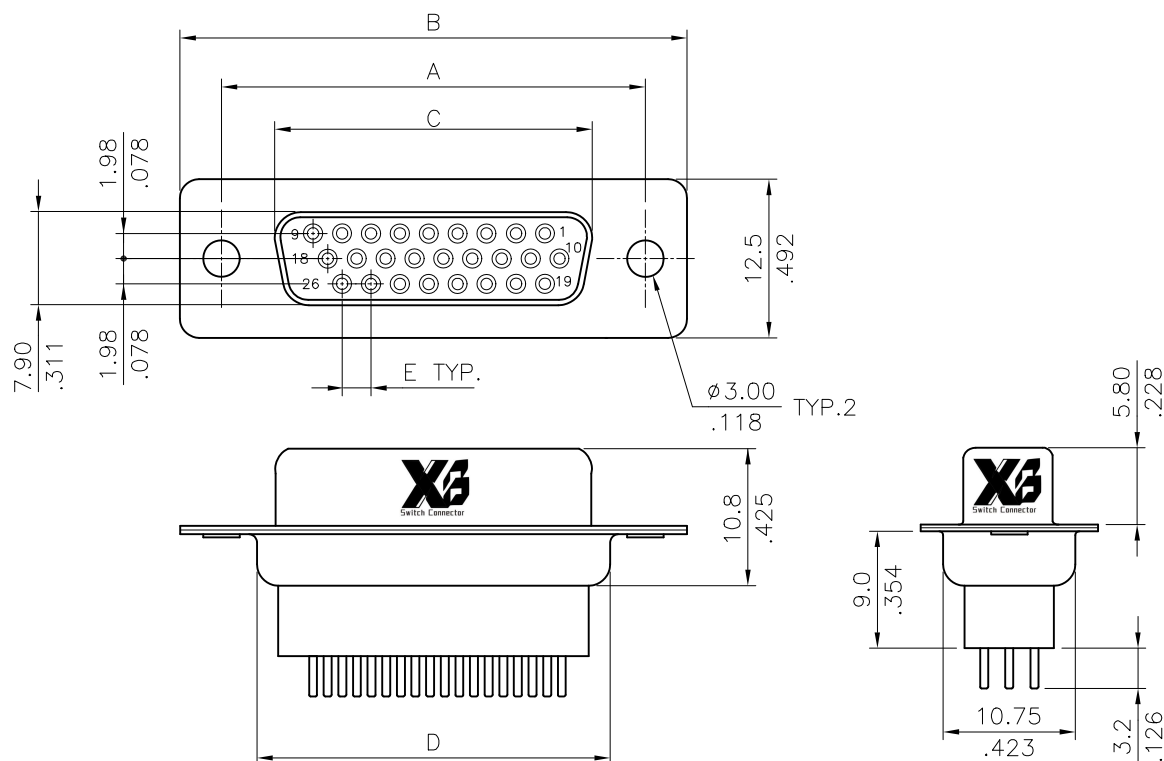

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.30(.642)	19.20(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	24.60(.969)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.30(2.256)	2.41(.095)

Ordering Code :

CD04 26 S 2 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type:S= Receptacle(Female)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective $0.38\mu\text{m}(15\mu)$ Gold plated over $1.27\mu\text{m}(50\mu)$ Nickel

C= Selective $0.76\mu\text{m}(30\mu)$ Gold plated over $1.27\mu\text{m}(50\mu)$ Nickel

⑤ Color: 1= Black

⑥ Other Option:

△ 00= With $\phi 3.00\text{mm}$ holes on shell(Standard)

B0= Riveted #4-40 UNC open nuts on front shell

C0= Riveted #4-40 UNC open nuts on rear shell

D*= Riveted #4-40 UNC close ground stand-off on rear shell

Lead Free Process

RoHS Compliant

Mounting Style

Code	00	Code	B0	Code	C0	Code	D*
		DIM. L= 4.0mm 		DIM. L= 4.0mm 			

④						DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB TOP ENTRY HIGH PROFILE BOARD MOUNT FEMALE CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
③				DRAWN BY:	Ken	3/12-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②	Ken	3/12-18'	ECRT117079/ECNT118047	ENGINEER:	Sun	3/13-18'	.X ± 0.30/.012 X' ± 1'	FINISH:	
①	Sandy	3/25-10'	ECN10079	CHECKED BY:	Eisley	3/15-18'	.XX ± 0.20/.010 X" ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/15-18'	.XXX ± 0.10/.004 XX' ±		DRAWING NO. CD0403SE PART NO. CD04**S*1**
									SCALE 2 / 1 SHEET 1 OF 1