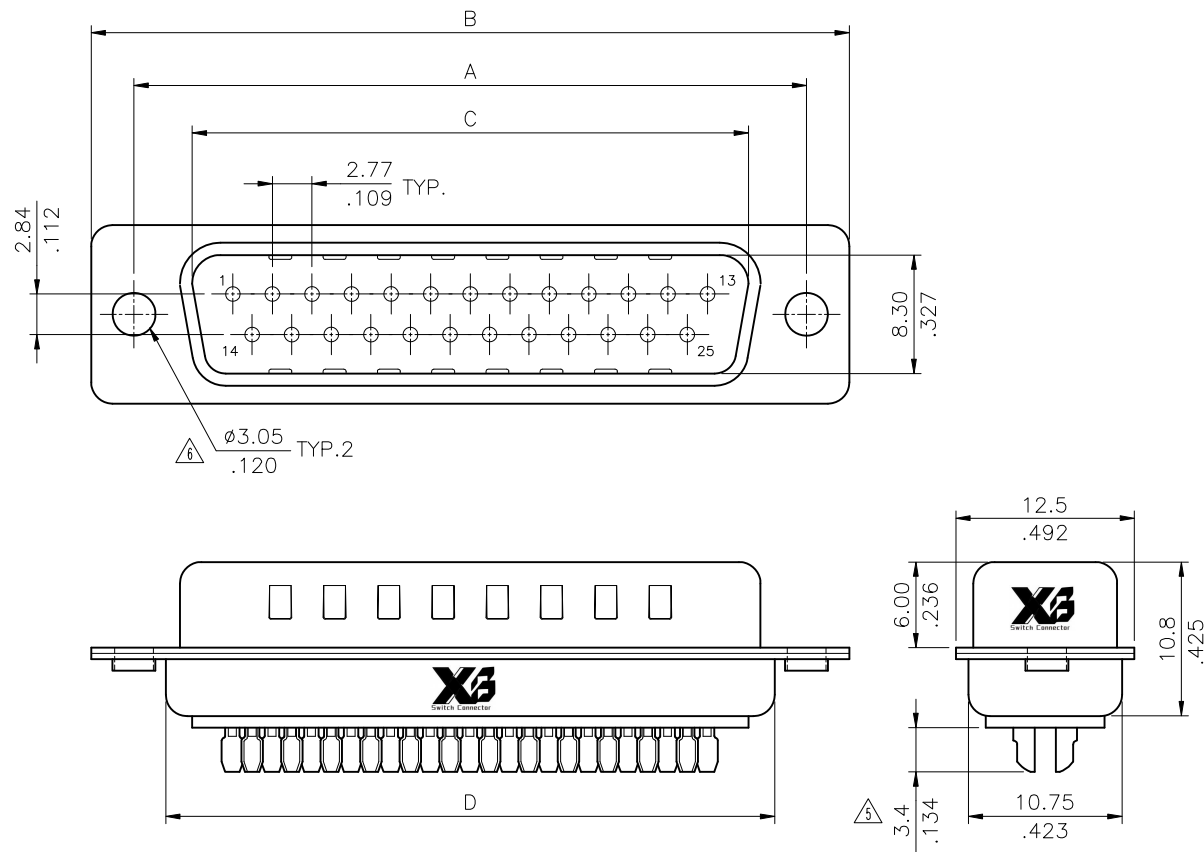




Material:

Insulator: Glass filled polyester UL 94V-0

Contact: Brass

△ Shell: Steel, Nickel plated as standard

Ordering Code

CD51 25 P A 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits: 09, 15, 25, 37

③ Contact type: P= Plug(Male)

④ Plating option:

A= Selective Gold flash plated over Nickel

⑤ Color: 1= Black, 7= Blue, 0= White

⑥ Other Option:

00 = With $\phi 3.05$ mm holes on shell(Standard)





A0 = Riveted #4-40 UNC close nuts on front shell

B0 = Riveted #4-40 UNC open nuts on front shell

C0 = Riveted #4-40 UNC open nuts on rear shell

△ (C0 Type only 15, 25, 37 circuits)

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)

Mounting Style		Lead Free Process		RoHS Compliant			
Code	00	Code	A0	Code	B0	Code	C0
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

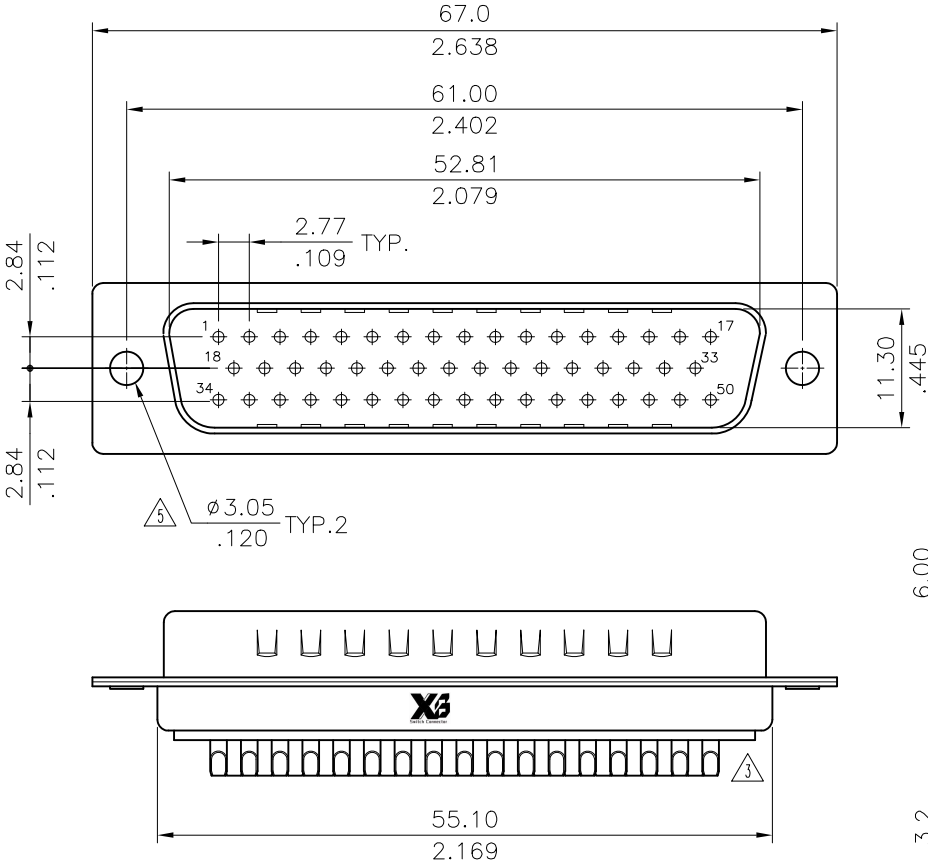
△8	Karen	5/31-22'	ECNT122042/ECRT122006		DATE	UNIT: mm / inch	SOLDER CUP SERIES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
△7	Ken	3/15-18'	ECRT117079/ECNT118047	DRAWN BY:	Karen	7/26-22'				
△6	Sandy	3/25-10'	ECN10079	ENGINEER:	Sun	7/26-22'	MATERIAL:		DRAWING NO.	CD5101SJ
△5	Sun	9/30-09'	ECR09128-0/ECN09488	CHECKED BY:	Eisley	8/1-22'				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	8/1-22'	FINISH:		SCALE	2 / 1
									SHEET	1 OF 1

Material:

Insulator: Glass filled polyester UL 94V-0

Contact: Brass

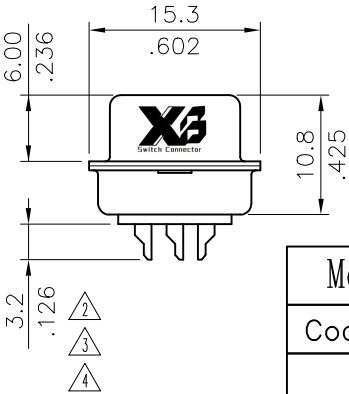
△ Shell: Steel, Nickel plated as standard







Ordering Code

CD51 50 P 2 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: P= Plug(Male)
- ④ Plating option:
 - 2= Gold flash plated over Nickel
 - A= Selective Gold flash plated over Nickel
- ⑤ Color: 1= Black, 7= Blue, 0= White
- ⑥ Other Option:
 - 00 = With $\phi 3.05$ mm holes on shell(Standard)
 - A0 = Riveted #4-40 UNC close nuts on front shell
 - B0 = Riveted #4-40 UNC open nuts on front shell
 - C0 = Riveted #4-40 UNC open nuts on rear shell



Mounting Style		Lead Free Process		RoHS Compliant			
Code	00	Code	A0	Code	B0	Code	C0
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

△6	Ken	3/13-18'	ECRT117079/ECNT118047		DATE	UNIT: mm / inch	TITLE: D-SUB MALE 50P SOLDER CUP TYPE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△5	Sandy	3/25-10'	ECN10079	DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△4	Sun	9/30-09'	ECR09128-0/ECN09488	ENGINEER:	Sun	3/16-18'	.X ±0.30/.012 .X' ± 1'	DRAWING NO. CD5103SH PART NO. CD5150P****			
△3	Sun	9/18-06	ECRN06329	CHECKED BY:	Eisley	3/23-18'	.XX ±0.20/.008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/23-18'	.XXX ±0.10/.004 .X' ±	SCALE 2 / 1 SHEET 1 OF 1			