


Materials:

* Insulator: Glass filled polyester UL 94V-0

* Contact: Brass

△* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD5303S*

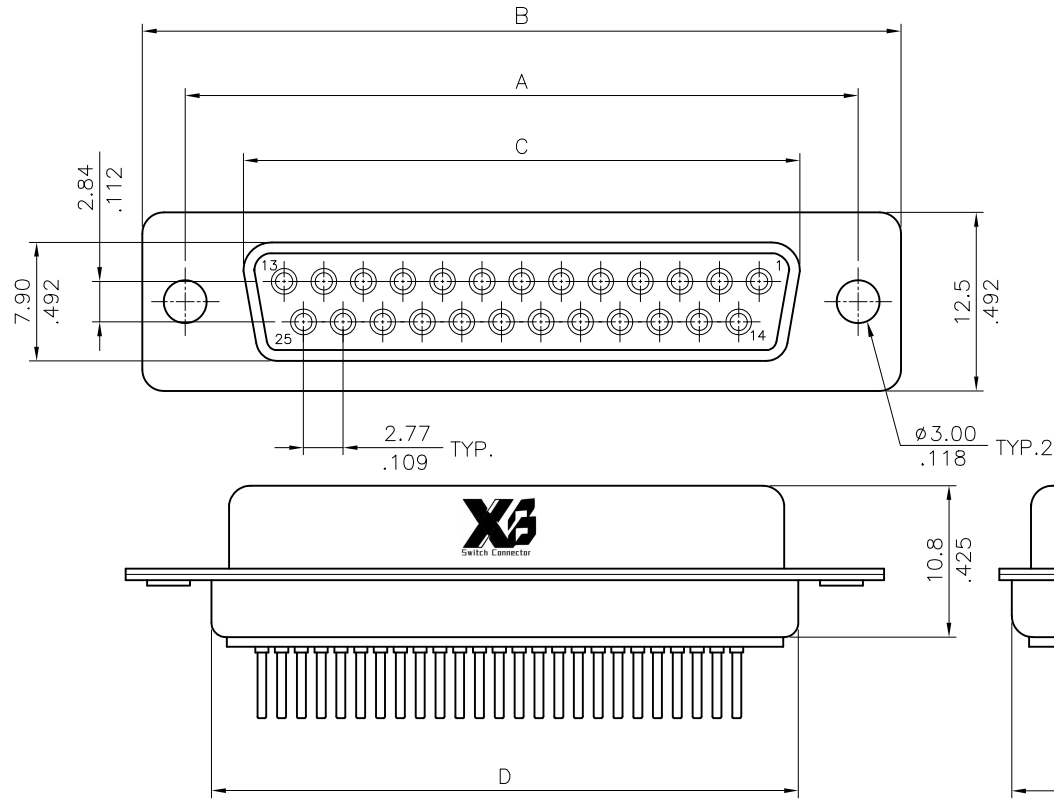

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.30(.642)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	24.60(.969)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.30(2.256)

Ordering Code:

CD53 25 S 2 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts: 9,15,25,37

③ Contact type: S=Receptacle(Female)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel

C= Selective 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel

⑤ Color: 1= Black, 0= White, 7= Blue

⑥ Other Option:

△00 = With ϕ 3.00mm holes on shell(Standard)

B0 = Riveted #4-40 UNC open nuts on front shell

C0 = Riveted #4-40 UNC open nuts on rear shell

△D0 = Riveted #4-40 UNC ground stand-off on rear shell

Lead Free Process

RoHS Compliant

Mounting Style

Code	00	Code	B0	Code	C0	Code	D0
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 6.0mm

4						DATE	UNIT: mm / inch		TITLE: D-SUB TOP ENTRY BOARD MOUNT FEMALE CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD				
3	Ken	3/15-18'	ECRT117079/ECNT118047	DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CD5301SJ	PART NO.
2	Sandy	3/25-10'	ECN10079	ENGINEER:	Sun	3/16-18'	.X ±0.30/.012	X' ±1"	FINISH:					
1	SUN	8/27/03'	ECN03269	CHECKED BY:	Eisley	3/23-18'	.XX ±0.20/.008	.X ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/23-18'	.XXX ±0.10/.004	.XX ±						
SCALE 2 / 1 SHEET 1 OF 1														