


Material:

* Insulator: Glass filled polyester UL 94V-0

* Contact: Brass

△ * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD5303S*

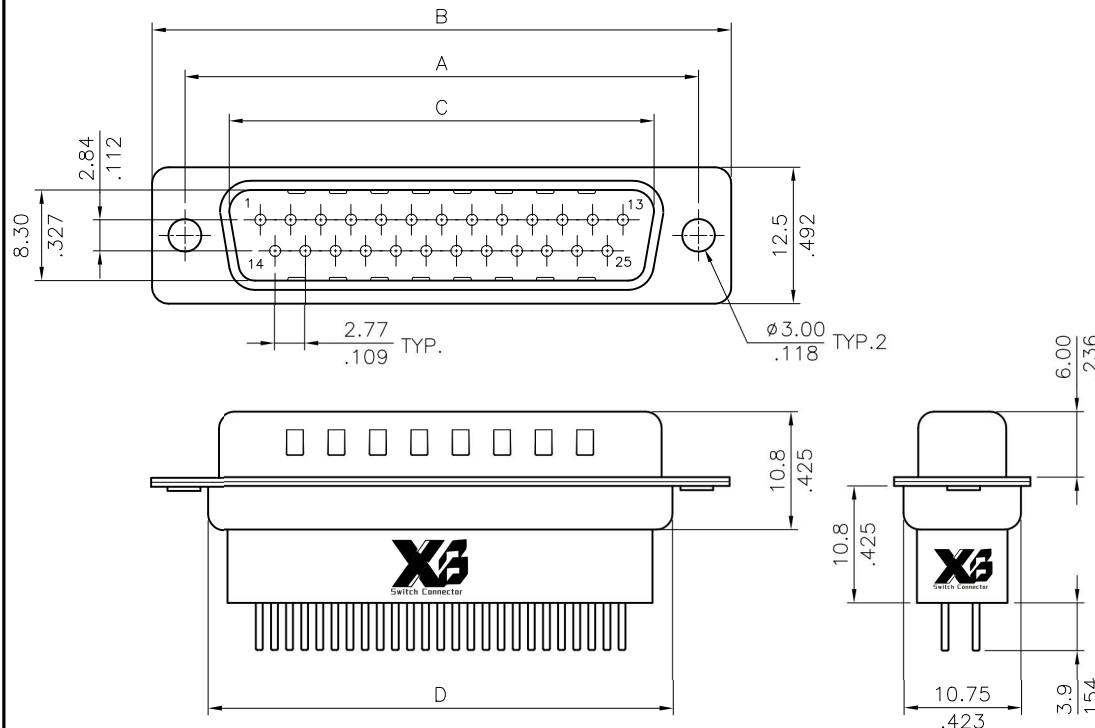

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)

Ordering Code:

CD54 25 P 2 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts

③ Contact type: P= Plug (Male)

④ Plating option:

2= Gold flash plated over 1.27μm(50μ") Nickel

A= Selective Gold flash plated over 1.27μm(50μ") Nickel

B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Color: 1= Black

⑥ Other Option:

△ 00 = With Ø3.00mm holes on shell(Standard)

B0 = Riveted #4-40 UNC open nuts on front shell

C0 = Riveted #4-40 UNC open nuts on rear shell

D0 = Riveted #4-40 UNC close ground stand-off on rear shell

Lead Free Process

RoHS Compliant

Mounting Style

Code	00	Code	B0	Code	C0	Code	D0

4						DATE	UNIT: mm / inch		TITLE: D-SUB TOP ENTRY HIGH PROFILE BOARD MOUNT MALE CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3	Ken	3/15-18'	ECRT117079/ECNT118047	DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2	Sandy	3/25-10'	ECN10079	ENGINEER:	Sun	3/16-18'	.X ±0.30/.012	X' ±1"	MATERIAL:	DRAWING NO.	CD5402SF	PART NO.	CD54**P*1**
1	Jessie	9/24-03'	ECN03310	CHECKED BY:	Eisley	3/23-18'	.XX ±0.20/.008	X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/23-18'	.XXX ±0.10/.004	.XX' ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1