


Material:

- * Insulator: Glass filled polyester UL 94V-0
- * Contacts: Copper alloy
- △ * Shell: Steel, Nickel plated as standard
- * Recommended P.C. Board Layout see drawing No. CD6113S*

Ordering Code:

CD61 25 P 2 1 F0
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts
- ③ Contact type: P= Plug (Male)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76um(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black , T= Turquoise
- ⑥ Other Option:
F0= Riveted ground hooks with #4-40 UNC open (Standard)
G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screws
J0= Assembly ground hooks by #4-40 UNC Hex screws

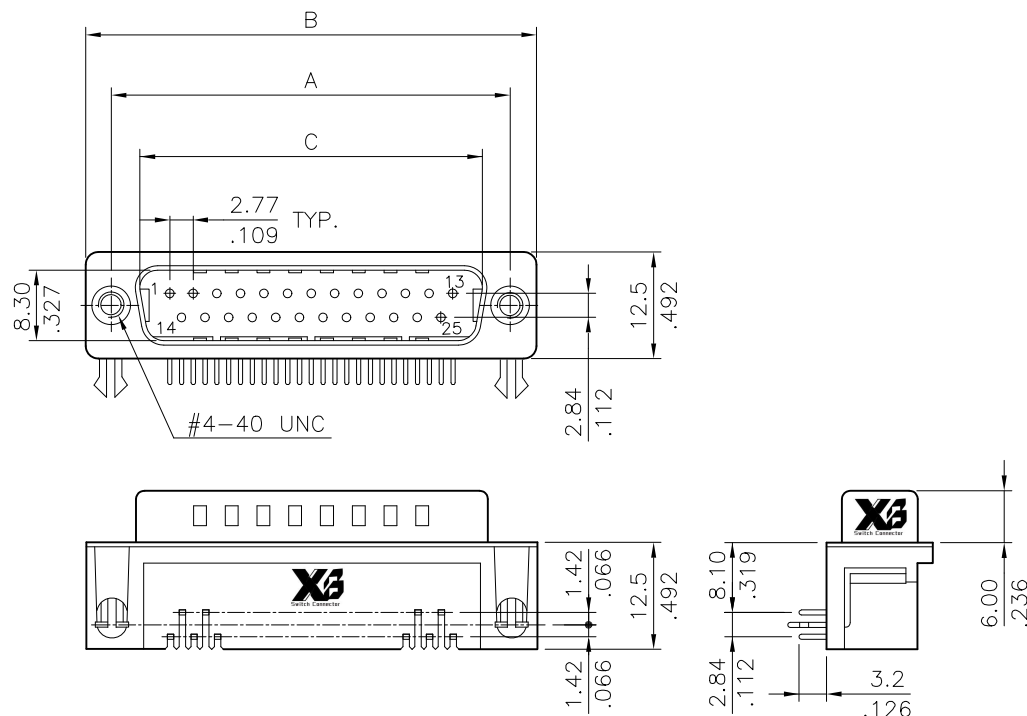

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Lead Free Process

RoHS Compliant

Mounting Style

Code	F0	Code	G0	Code	J0
		DIM. L= 4.8mm 		DIM. L= 4.8mm 	

4					DATE	UNIT: mm / inch	TITLE: D-SUB PCB MOUNT (8.1mm) MALE CONNECTOR	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3	Ken	3/12-18'	ECRT117079/ECNT118047	DRAWN BY: Ken	3/22-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2	SUN	7/13-11'	ECN11148/ECR11034-1	ENGINEER: Sun	3/23-18'	.X ± 0.30/.012 X' ± 1"	FINISH:	DRAWING NO. CD6107SH	PART NO.	CD61**P****	
1	SUN	12/11/03'	ECN03464/ECR03065-0	CHECKED BY: Eisley	3/26-18'	.XX ± 0.20/.010 X' ±		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/26-18'	.XXX ± 0.10/.004 X' ±					