


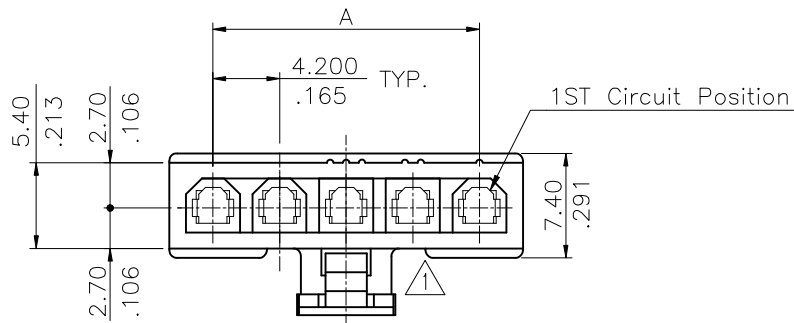


Material:

* Insulation: Nylon 66, Color Nature




Ordering Code:

CP-01 1 ** 0 * S
① ② ③ ④ ⑤ ⑥


- ① Series No.
② Contact Type: 1= Receptacle
③ No of Circuits:
④ Plating Code: 0= Non plating
⑤ Variation: 1= UL 94V-2
3= UL 94V-0
⑥ Option: S= Single Row

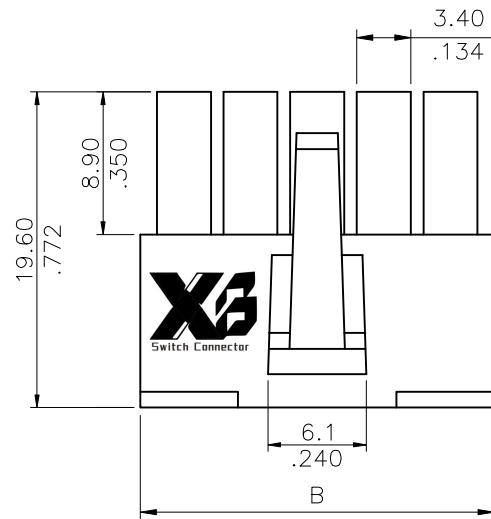


FOR 4 , 5 CIRCUITS

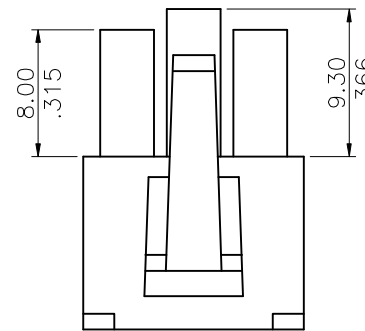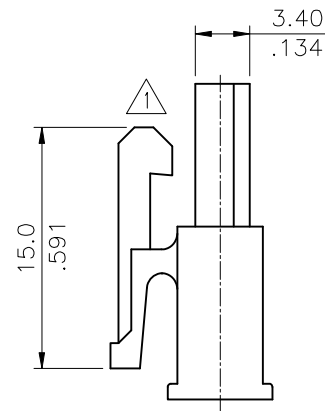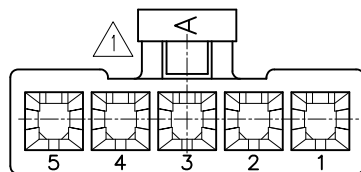


FOR 3 CIRCUITS



3 CIRCUITS



4 CIRCUITS



5 CIRCUITS

Circuits	Dimension	
	A	B
3	8.40(.331)	13.8(.543)
4	12.60(.496)	18.0(.709)
5	16.80(.661)	22.2(.874)

CIRCUIT PATTERN SCHEDULE

Halogen-Free

④						DATE	UNIT: mm / inch		TITLE: 4.20mm PICH RECEPTACLE CONN. (SINGLE ROW)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.					
③				DRAWN BY:	Karen	11/12-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CP0178SB	PART NO.	CP-011**0*S
②				ENGINEER:	Sun	11/13-20'	.X ± 0.38/.015	X* ± 1"				SCALE	2 / 1	SHEET	1 OF 1
①	Karen	11/10-20'	ECNT120261/ECRB120046	CHECKED BY:	Eisley	11/18-20'	.XX ± 0.25/.010	.X* ±	FINISH:						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/18-20'	.XXX ± 0.10/.004	.XX* ±							