
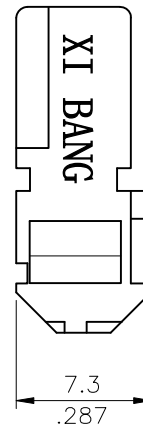
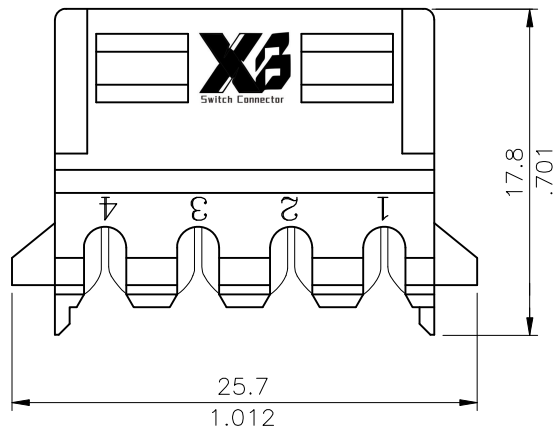


Material:

* Insulation: Nylon 66 94V-2 or 94V-0

* Contact: Phosphor Bronze

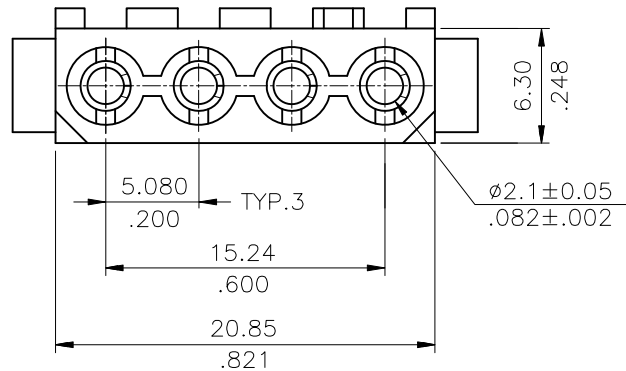

Ordering Code:

CP33 04 S 1 00 *
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits: 4 Circuits

③ Contact type: S=Female

④ Contact plated: 1= $1.52\mu\text{m}$ ($60\mu''$) Min. Tin over
 $0.38\mu\text{m}$ ($15\mu''$) Nickel

⑤ Color code: 00= Color Nature


⑥ Option: 0= 94V-2, Accepts AWG#18~20

A= 94V-2, Accepts AWG#22

B= 94V-0, Accepts AWG#18~20

C= 94V-0, Accepts AWG#22

Cavity No.

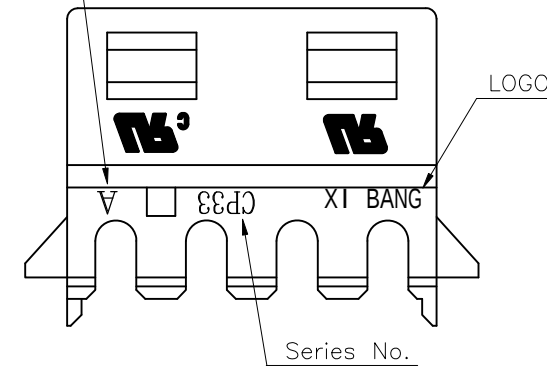

④						DATE	UNIT: mm / inch	TITLE: 5.08MM(.200")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY:	Karen	4/13-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED	IDC RECEPTACLE CONNECTOR				
②				ENGINEER:	Sun	4/13-20'	.X ± 0.30/.012	MATERIAL:	DRAWING NO. CP3301SE PART NO. CP3304S100*			
①	Karen	4/13-20'	ECNT120089/ECRB120007	CHECKED BY:	Eisley	4/13-20'	.XX ± 0.20/.008	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/13-20'	.XXX ± 0.10/.004		SCALE	2 / 1	SHEET	1 OF 1