

Material:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD6113S*

Ordering Code:

CD62 25 P 2 1 F0
① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts

③ Contact type: P= Plug(Male)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective 0.38μm(15μ") Gold plated over
1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") Gold plated over
1.27μm(50μ") Nickel

⑤ Color: 1= Black


⑥ Other Option:

F0= Riveted ground hooks with #4-40 UNC open (Standard)

G0= Riveted ground hooks pre-loaded #4-40 UNC
Hex screws

I0= Riveted ground tabs thread #4-40 UNC open and
ground tabs with ø3.2mm holes

J0= Assembly ground hooks by #4-40 UNC Hex screws

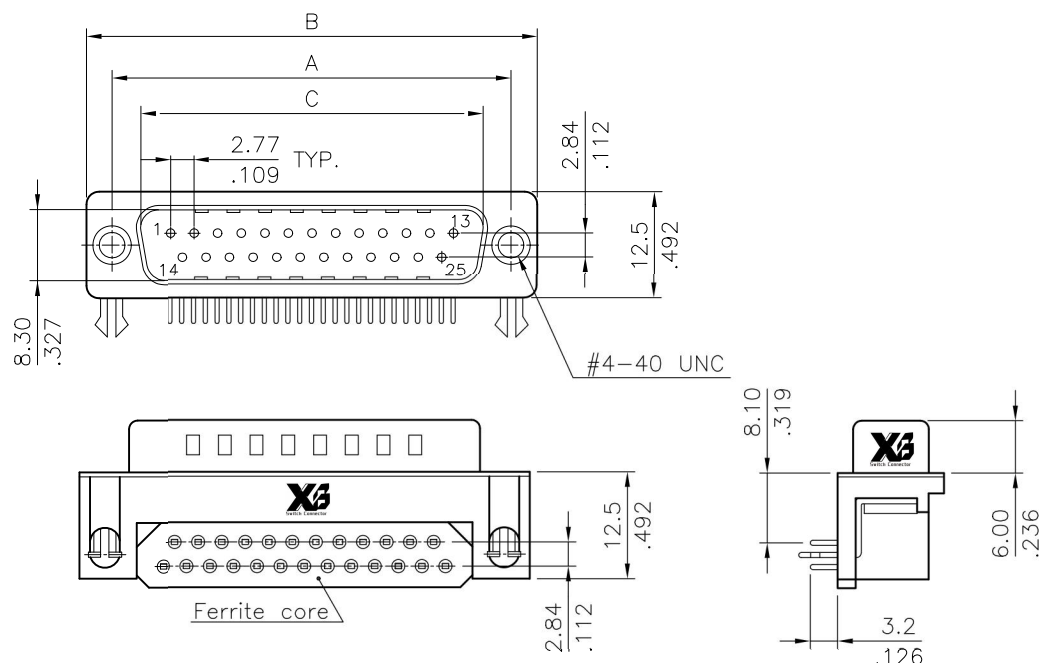

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.087)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Mounting Style

Code	F0	Code	G0	Code	I0	Code	J0
			DIM. L= 4.8mm		ø A= 3.2mm		DIM. L= 4.8mm

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: D-SUB WITH FERRITE CORE PCB MOUNT (8.1mm) MALE CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3				DRAWN BY: Ken	3/16-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER: Sun	3/19-18'	.X ± 0.30/.012 X* ± 1"	MATERIAL:	DRAWING NO.	CD6202SE	PART NO.	CD62**P*1**
1	Ken	3/12-18'	ECRT117079/ECNT118047	CHECKED BY: Eisley	3/23-18'	.XX ± 0.20/.010 X* ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/23-18'	.XXX ± 0.10/.004 X* ±					