

Notes:




* Materail:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White

Contact: Brass

△ Shell: Steel, Nickel plated as standard

* For Lead Free Wave Flow Process

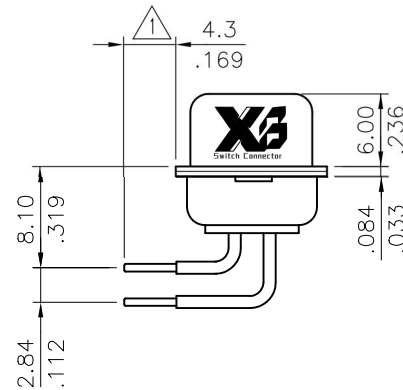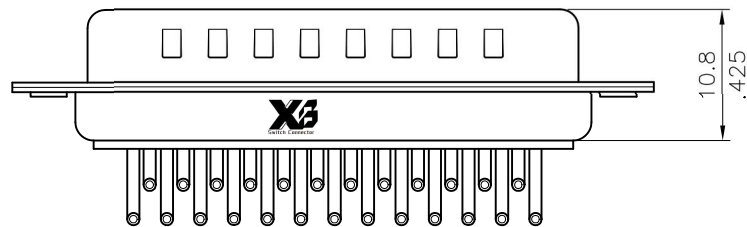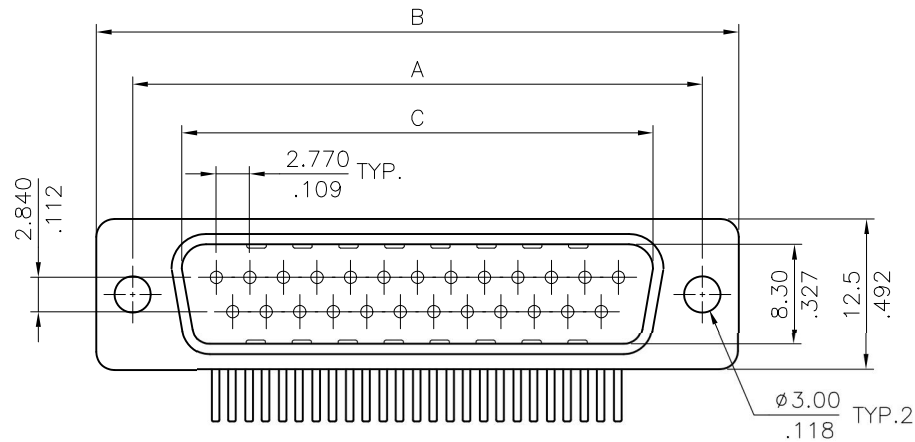

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Ordering Code :

CD73 25 P * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : P=Plug
- Contact Plating :
2 = Gold flash plated over 1.27μm(50μ") Nickel
3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
- Insulator Color :
1=Black , 0=White
- Other option :
00 = With Ø3.00mm holes on shell

Lead Free Process

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: D-SUB SIDE ENTRY (8.1mm) MALE CONNECTOR (MACHINED CONTACTOR)
△3				DRAWN BY: Karen	2/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
△2	Karen	2/23-18'	ECNT117262/ECRT117074	ENGINEER: Sun	2/27-18'	.X ±0.30/.012 X' ± 1'	MATERIAL:
△1	Karen	10/04-11'	ECN11215/ECR11080-0	CHECKED BY: Eisley	3/02-18'	.XX ±0.20/.008 X' ±	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/02-18'	.XXX ±0.10/.004 .XX ±	

DRAWING NO.	CD7301SF	PART NO.	CD73**P**00
SCALE	2 / 1	SHEET	1 OF 1

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD