

Notes:

* Material:




Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

△ Shell: Steel, Nickel plated as standard

* For Lead Free Wave Flow Process

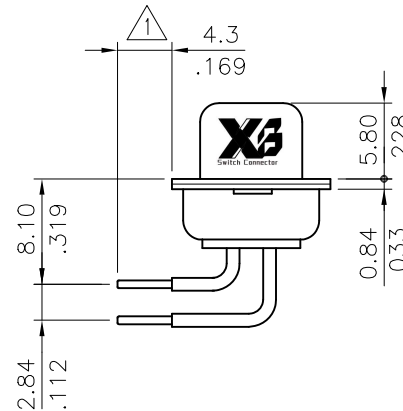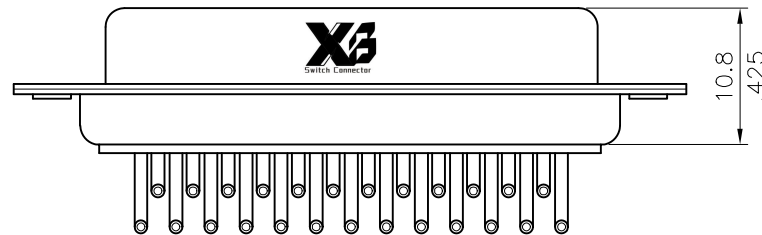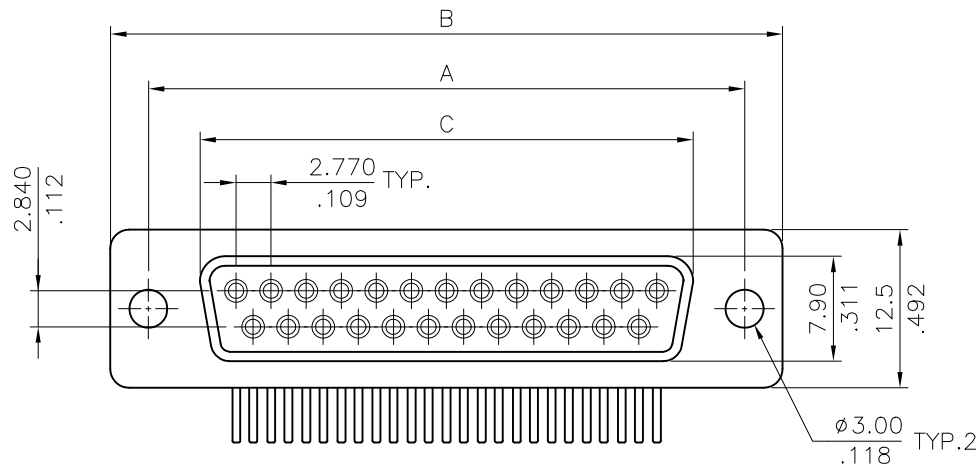

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.30(.642)
15	33.32(1.312)	39.2(1.543)	24.60(.969)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)

Ordering Code :

CD73 25 S * * 00

① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 9,15,25,37
3. Contact type : S=Receptacle
4. Contact Plating :
2 = Gold flash plated over 1.27 μ m(50 μ ") Nickel
3 = 0.38 μ m(15 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
4 = 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
5 = 1.27 μ m(50 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
5. Insulator Color :
1=Black , 0=White
6. Other option :
00 = With Ø3.00mm holes on shell

Lead Free Process

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: D-SUB SIDE ENTRY (8.1mm) FEMALE CONNECTOR (MACHINED CONTACTOR)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		
3				DRAWN BY:	Karen	2/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Karen	2/23-18'	ECNT117262/ECRT117074	ENGINEER:	Sun	2/27-18'	.X ±0.30/.012	X' ± 1'	MATERIAL:			
1	Karen	10/04-11'	ECN11215/ECR11080-0	CHECKED BY:	Eisley	3/02-18'	.XX ±0.20/.008	.X' ±	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/02-18'	.XXX ±0.10/.004	.XX' ±		DRAWING NO. CD7302SE	PART NO. CD73**S**00	
										SCALE	2 / 1	SHEET 1 OF 1