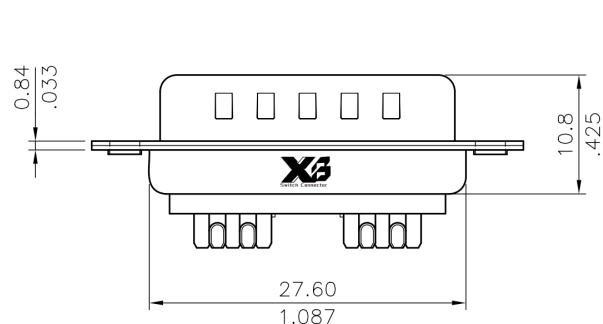
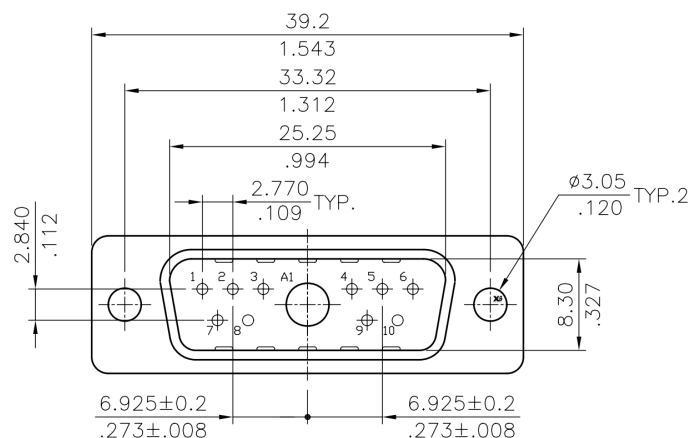


Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

11W1 P0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:
P0= Plug

③ Contact tail Style:
S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15μ" Gold plated over Nickel

C= Seletive 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green

⑥ Mounting Style:

000= With 3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

4						DATE	UNIT: mm / inch		TITLE: 11W1 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD								
3				DRAWN BY:	James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED											
2				ENGINEER:	David	11/19-02'	.X	±0.30/.012	X'	± 1'	MATERIAL:							
1				CHECKED BY:	David	11/19-02'	.XX	±0.20/.008	X'	±								
	SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	11/19-02'	.XXX	±0.10/.004	.XX'	±	FINISH:	DRAWING NO.	11W101SC	PART NO.	11W1P0S0**00*00	
														SCALE	2 / 1	SHEET	1	OF