
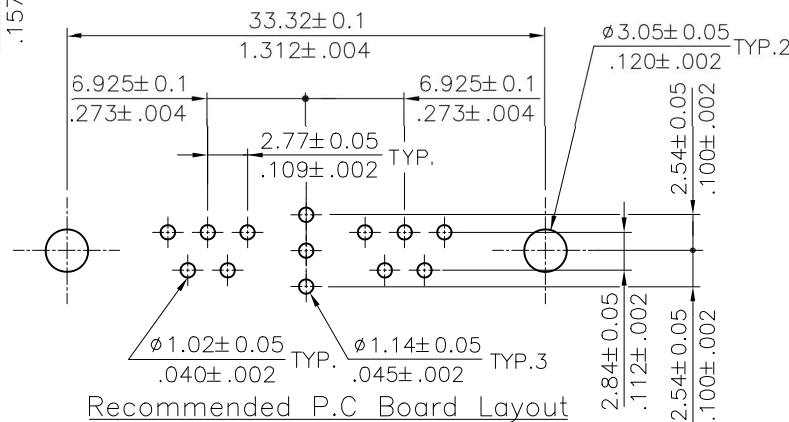
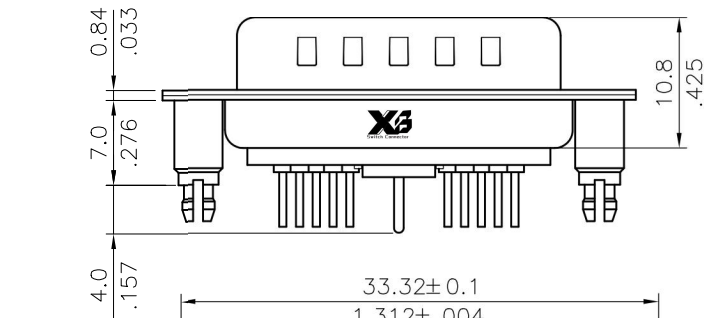


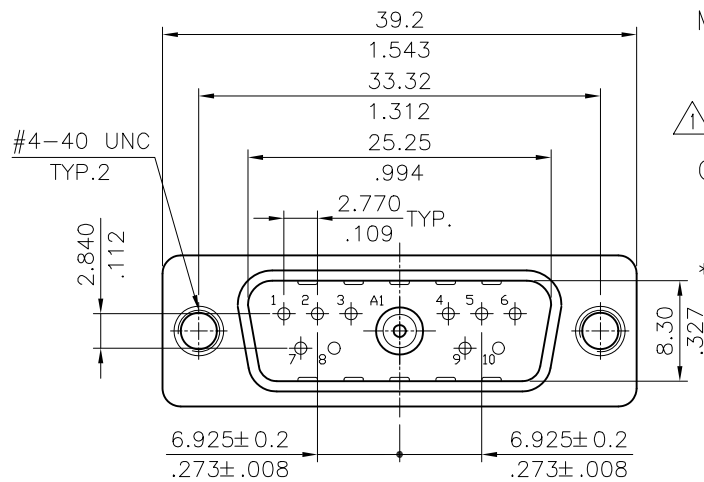

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy


① Shell: Steel, Nickel plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0, Color white

Contact: Brass

* For Lead Free Wave Flow Process

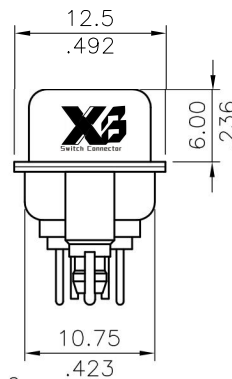

Ordering Code

11W1 P C V 3 2 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 50= 50Ω, 75= 75Ω





- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style		Lead Free Process		RoHS Compliant			
Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		DIM. L= 7.0mm 	

④					DATE	UNIT: mm / inch	TITLE: 11W1 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
③					DRAWN BY: Karen	1/09-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②					ENGINEER: Sun	1/10-18'	.X ± 0.30/.012 X' ± 1'		
①	Karen	1/09-18'	ECNT117262/ECRT117074		CHECKED BY: Eisley	1/11-18'	.XX ± 0.20/.008 X' ±		
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	1/11-18'	.XXX ± 0.10/.004 X' ±	DRAWING NO. 11W103SC	PART NO. 11W1PCV*****00
								SCALE 2 / 1	SHEET 1 OF 1