


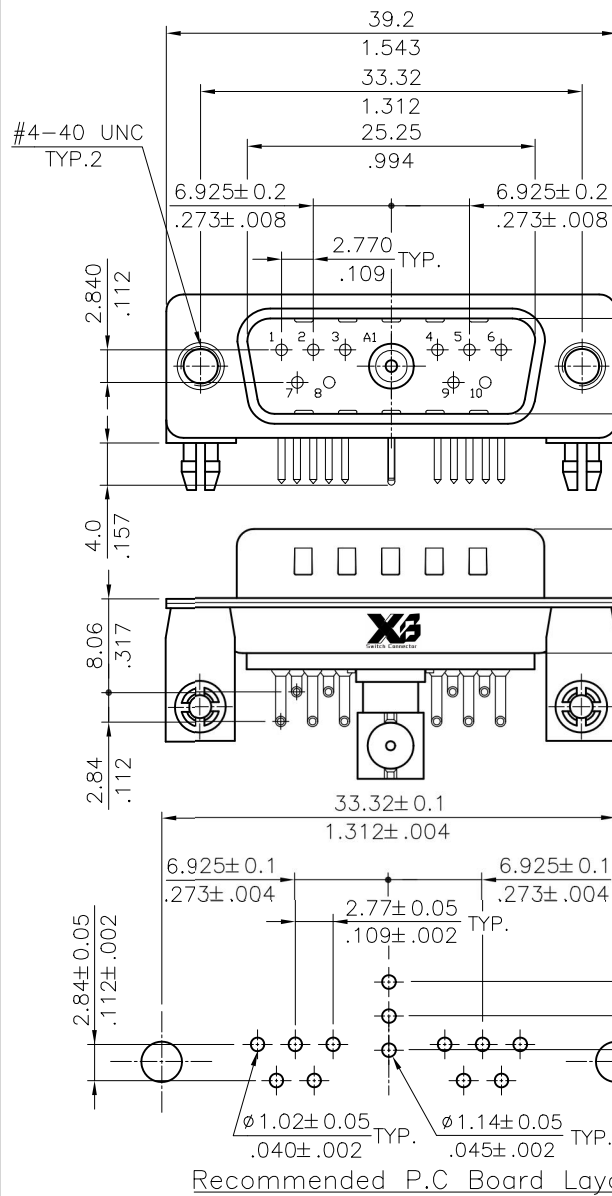

Notes:

- Insulator: Glass filled Polyester UL 94V-0
Contact: Copper alloy
△Shell: Steel, Nickel plated as standard
Coaxial terminal
Insulator: Teflon UL 94V-0, Color white
Contact: Brass
*For Lead Free Wave Flow Process

Ordering Code

11W1 P C H 3 2 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Connector Type: P= Plug
③ Contact type: C= Coaxial Contact
④ Contact tail style: H= Right Angle Dip type
⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
⑥ Signal contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
⑦ Insulator color: 1= Black, 6= Green
⑧ Performance: 50= 50Ω, 75= 75Ω
⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs
with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs
with board locks(standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	I00	Code	I10

4					DATE	UNIT: mm / inch	TITLE: 11W1 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3	Karen	1/09-18'	ECNT117262/ECRT117074	DRAWN BY:	Karen	1/09-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWING NO. 11W105SE PART NO. 11W1PCH***** SCALE 2 / 1 SHEET 1 OF 1			
2	Karen	4/07-17'	ECNT117049/ECRT117003	ENGINEER:	Sun	1/10-18'	.X ± 0.30/.012 X' ± 1"				
1	Sun	12/10-08'	ECN08604	CHECKED BY:	Eisley	1/11-18'	.XX ± 0.20/.008 X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/11-18'	.XXX ± 0.10/.004 X' ±				