


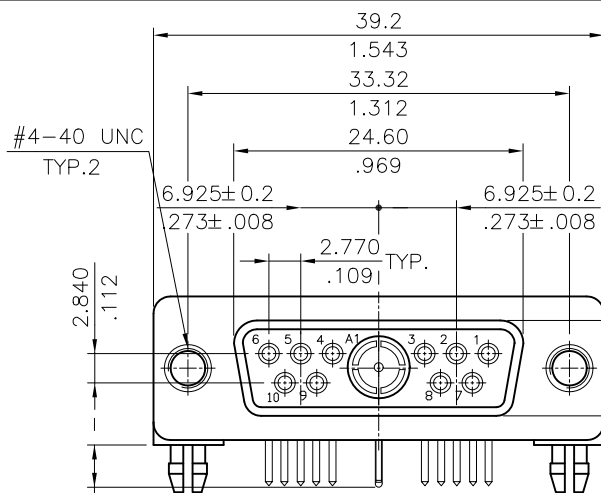

Notes:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy




③ Shell: Steel, Nickel plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0, Color white

Contact: Brass

*For Lead Free Wave Flow Process

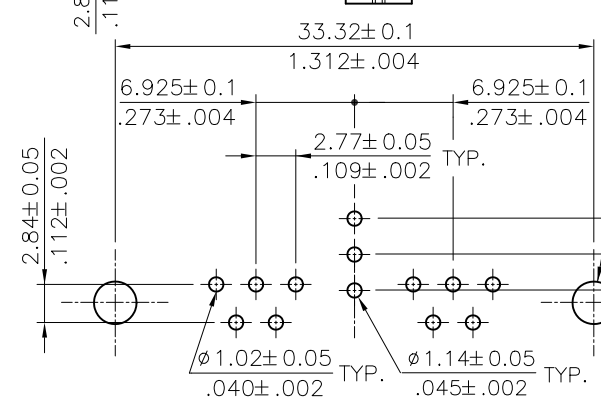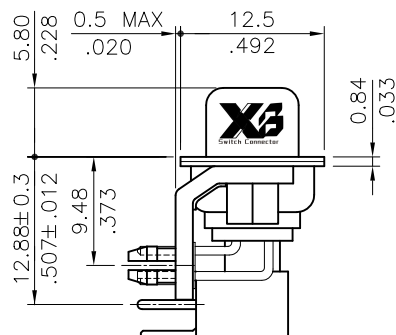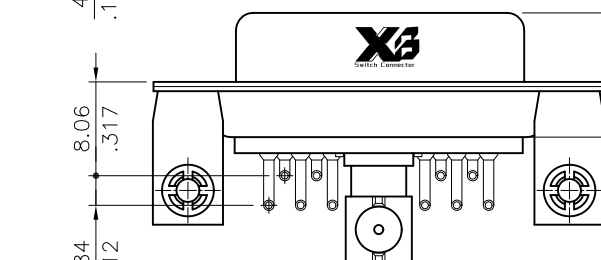

Recommended P.C Board Layout

Ordering Code

11W1 S C H 3 2 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 50= 50Ω, 75= 75Ω

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes

I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code

000

Code

B00

Code






C00

Code

I00

Code

I10



④

③

②

①

SYM

Karen

1/09-18'

ECNT117262/ECRT117074

DRAWN BY:

Karen

1/09-18'

ENGINEER:

Sun

1/10-18'

CHECKED BY:

Eisley

1/11-18'

APPROVED BY:

Eisley

1/11-18'

DATE

UNIT: mm / inch

TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012 .X' ± 1"

.XX ± 0.20/.008 .X' ±

.XXX ± 0.10/.004 .X' ±

TITLE: 11W1 COAXIAL FEMALE D-SUB
CONNECTOR (RIGHT ANGLE PCB
MOUNT TYPE)

MATERIAL:

FINISH:



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

DRAWING NO.

11W106SE

PART NO.




11W1SCH*****

SCALE

2 / 1

SHEET

1 OF 1

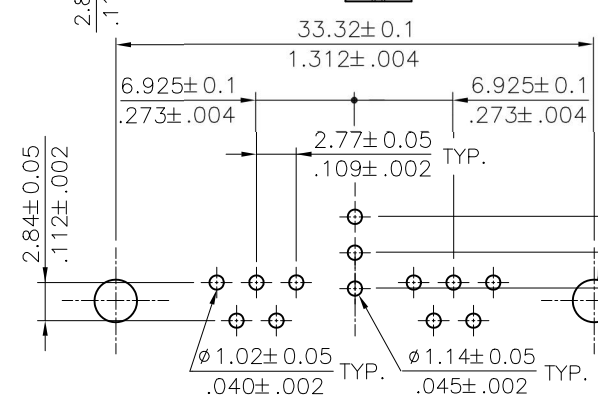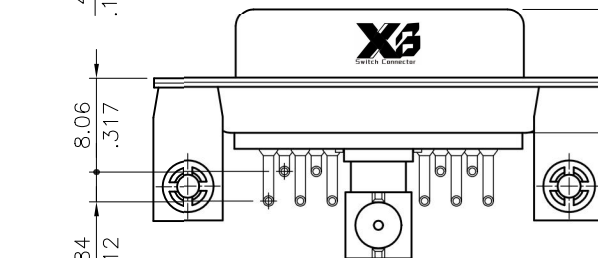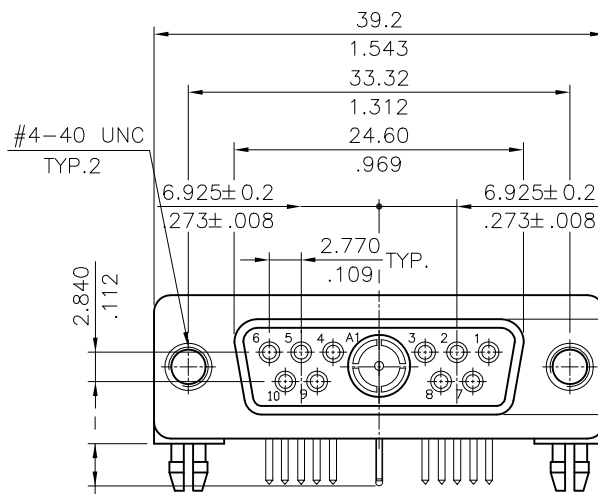


Notes:

Insulator: Glass filled Polyester UL 94V-0
Contact: Copper alloy
Shell: Steel, Nickel plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0, Color white
Contact: Brass
*For Lead Free Wave Flow Process

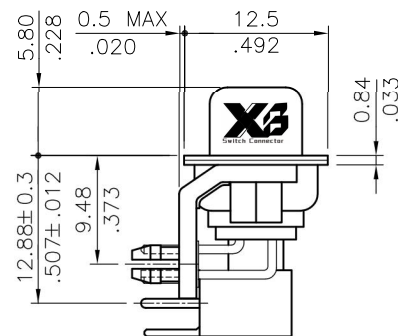

Recommended P.C Board Layout

Ordering Code

11W1 S C H 3 2 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	I00	Code	I10

④						DATE	UNIT: mm / inch	TITLE: 11W1 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
③	Karen	1/09-18'	ECNT117262/ECRT117074	DRAWN BY:	Karen	1/09-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②	Karen	4/07-17'	ECNT117049/ECRT117003	ENGINEER:	Sun	1/10-18'			
①	Sun	12/10-08'	ECN08604	CHECKED BY:	Eisley	1/11-18'	.X ± 0.30/.012 .X' ± 1"	MATERIAL:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/11-18'	.XX ± 0.20/.008 .X' ±	FINISH:	
							.XXX ± 0.10/.004 .XX' ±		
									DRAWING NO. 11W106SE PART NO. 11W1SCH*****
									SCALE 2 / 1 SHEET 1 OF 1