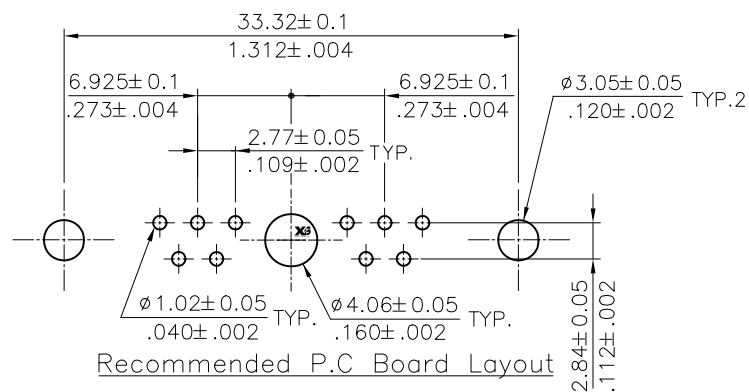
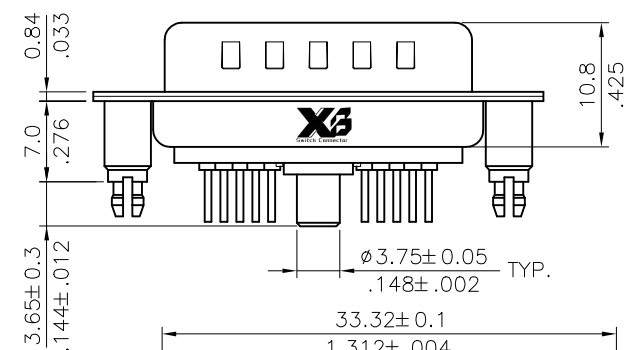
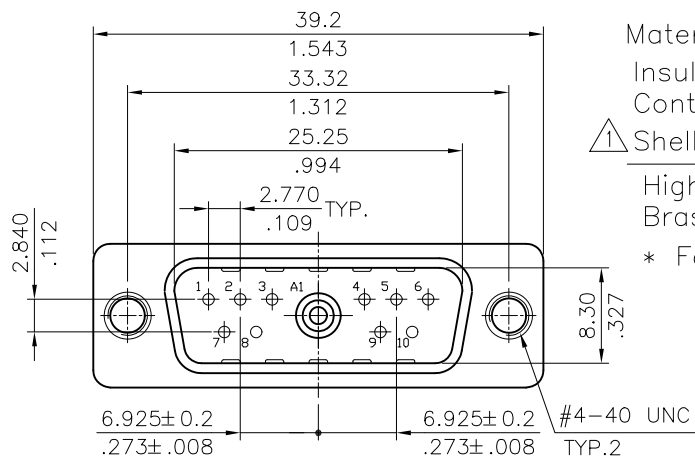




Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

① Shell: Steel, Nickel plated as standard

High power Contact :
Brass with Gold plated

* For Lead Free Wave Flow Process

Ordering Code

11W1 P P V 3 2 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Connector Type: P= Plug
③ Contact type: P= High Power Contact
④ Contact tail style: V= Straight Dip type
⑤ High power contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 40= 40A





- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off
on rear shell(standard)

Mounting Style		Lead Free Process		RoHS Compliant			
Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		DIM. L= 7.0mm 	

④						DATE	UNIT: mm / inch		TITLE: 11W1 40A HIGH POWER MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
③				DRAWN BY:	Karen	1/09-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
②				ENGINEER:	Sun	1/10-18'	.X ± 0.30/.012	X' ± 1"			
①	Karen	1/09-18'	ECNT117262/ECRT117074	CHECKED BY:	Eisley	1/11-18'	.XX ± 0.20/.008	.X ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/11-18'	.XXX ± 0.10/.004	.XX ±	FINISH:	DRAWING NO. 11W109SC	PART NO. 11W1PPV***40*00
										SCALE 2 / 1	SHEET 1 OF 1



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD