


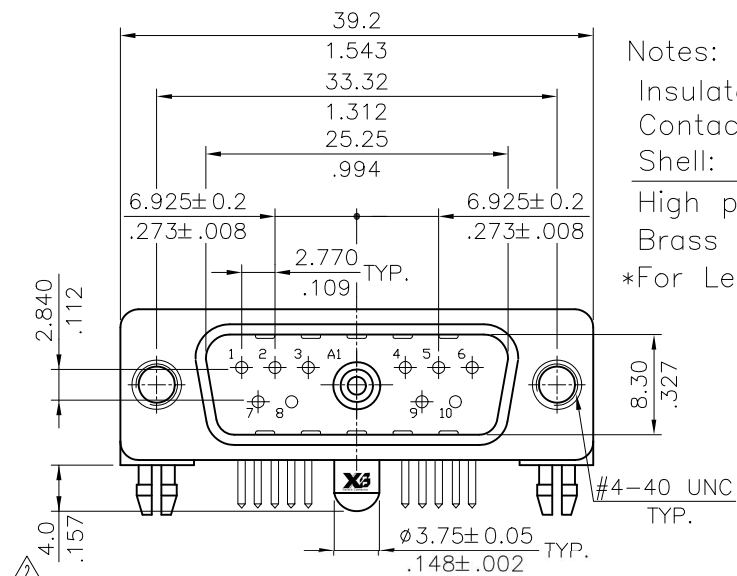

Notes:
 Insulator: Glass filled Polyester UL 94V-0
 Contact: Copper alloy
 Shell: Steel, Tin plated as standard
 High power Contact :
 Brass with Gold plated
 *For Lead Free Wave Flow Process

Ordering Code

11W1 P P H 3 2 1 40 I10
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
 5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
 000= With ø3.05mm holes on shell
 B00= Riveted #4-40 UNC open nuts on front shell
 C00= Riveted #4-40 UNC open nuts on rear shell
 I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
 I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Lead Free Process

RoHS Compliant

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
	DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		øA=3.2mm		

Recommended P.C Board Layout

4	Karen	4/07-17'	ECNT117049/ECRT117003		DATE	UNIT: mm / inch		TITLE: 11W1 40A HIGH POWER MALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3	Sun	12/10-08'	ECN08604	DRAWN BY:	Karen	4/10-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Jim	10/13/06'	ECR06094-0/ECN06369	ENGINEER:	Sun	4/10-17'	.X ± 0.30/.012 X* ± 1"					
1	Sun	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	Eisley	4/14-17'	.XX ± 0.20/.008 X* ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/14-17'	.XXX ± 0.10/.004 XX ±	MATERIAL:				
								FINISH:				
									DRAWING NO.	11W113SF	PART NO.	11W1PPH***40***
									SCALE	2 / 1	SHEET	1 OF 1