


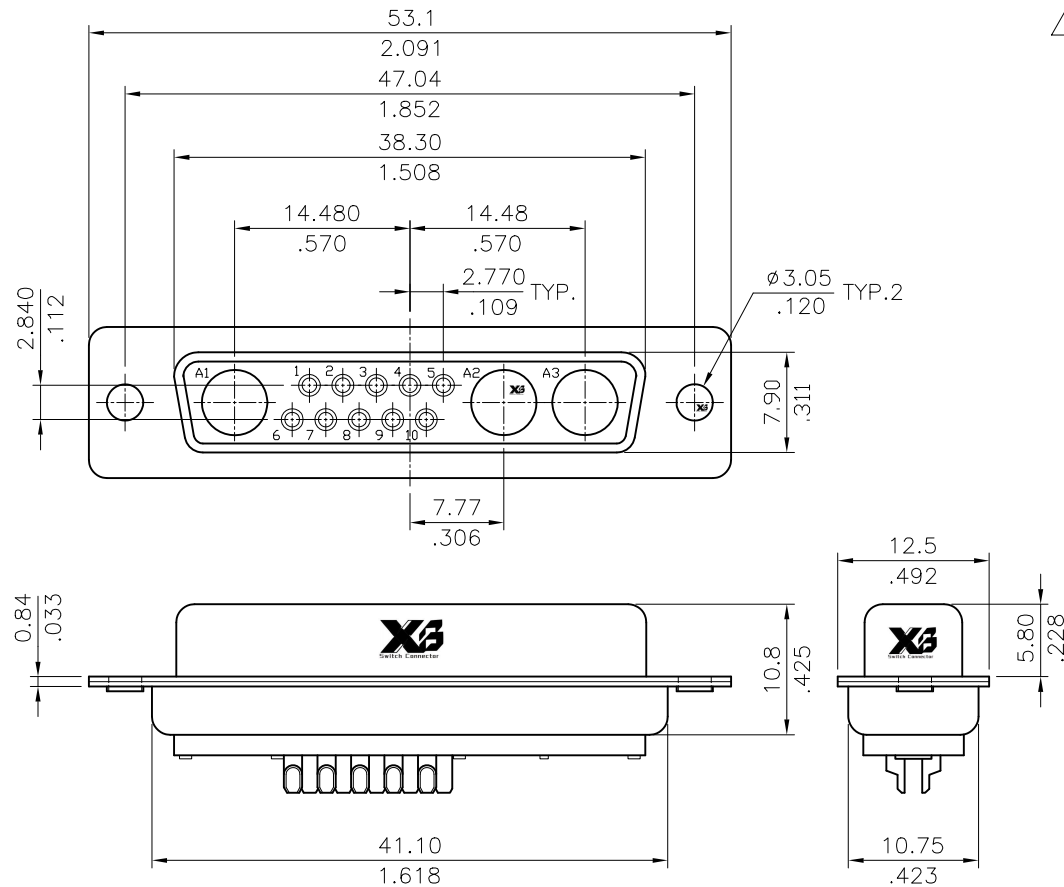

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

△ Shell: Steel, Nickel plated as standard

Ordering Code

13W3 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15μ" Gold plated over Nickel

C= Seletive 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green

⑥ Mounting Style:

000= With ø3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4					DATE	UNIT: mm / inch	TITLE: 13W3 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		
3				DRAWN BY: Karen	1/10-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CONNECTOR (SOLDER CUP TYPE)			
2				ENGINEER: Sun	1/11-18'	.X ±0.30/.012 X' ± 1"	MATERIAL:	DRAWING NO. 13W302SD PART NO. 13W3S0S0**00*00		
1	Karen	1/10-18'	ECNT117262/ECRT117074	CHECKED BY: Eisley	1/11-18'	.XX ±0.20/.008 X' ±	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	1/11-18'	.XXX ±0.10/.004 X' ±		SCALE	2 / 1	SHEET 1 OF 1