

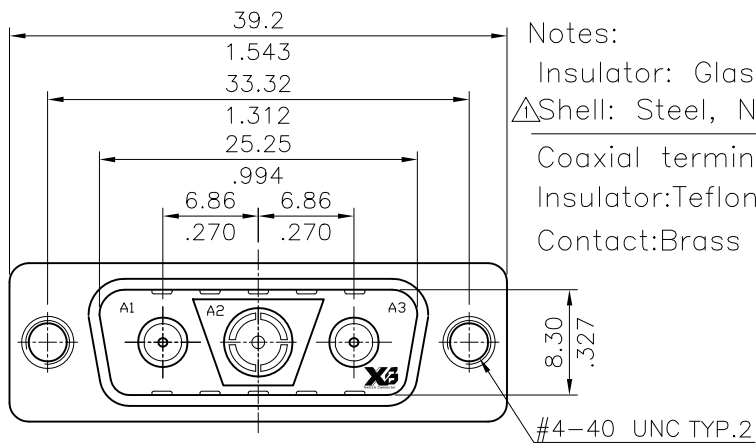
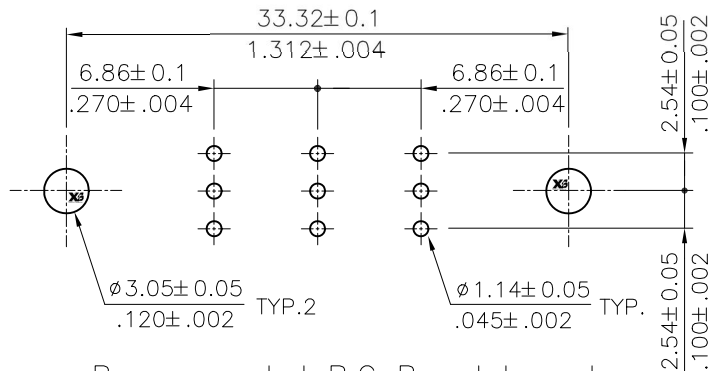


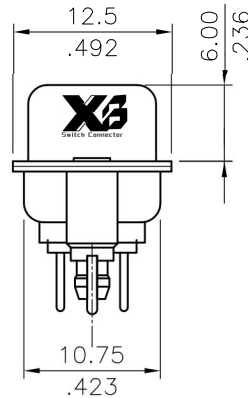

Ordering Code

3W3C P C V 3 0 1 75 D00
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug (2 Male + 1 Female Contacts)
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
 5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
 0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
 000= With ø3.05mm holes on shell
 B00= Riveted #4-40 UNC open nuts on front shell
 C00= Riveted #4-40 UNC open nuts on rear shell
 D00= Riveted #4-40 UNC ground stand-off on rear shell (standard)

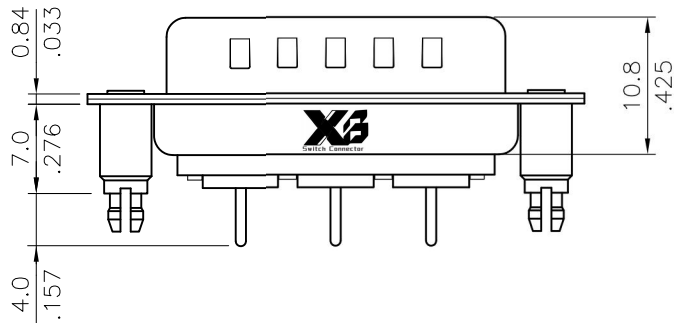

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
	DIM. L = 4.0mm		DIM. L = 4.0mm		DIM. L = 4.0mm		DIM. L = 7.0mm

4					DATE	UNIT: mm / inch	TITLE: 3W3C MALE COAXIAL D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3				DRAWN BY:	Karen	1/17-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER:	Sun	1/17-18'	.X ± 0.30/.012 X' ± 1'	DRAWING NO. 3W3C12SB PART NO. 3W3CPCV*0****00			
1	Karen	1/16-18'	ECNT117262/ECRT117074	CHECKED BY:	Eisley	1/19-18'	.XX ± 0.20/.008 X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/19-18'	.XXX ± 0.10/.004 XX' ±	SCALE 2 / 1 SHEET 1 OF 1			