
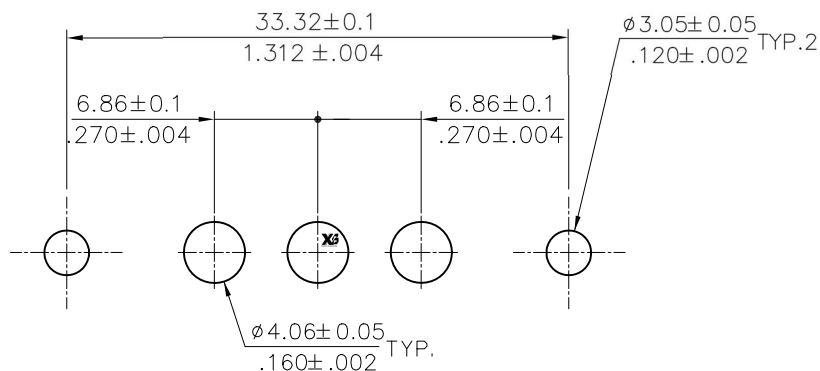
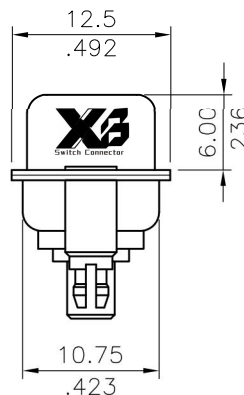
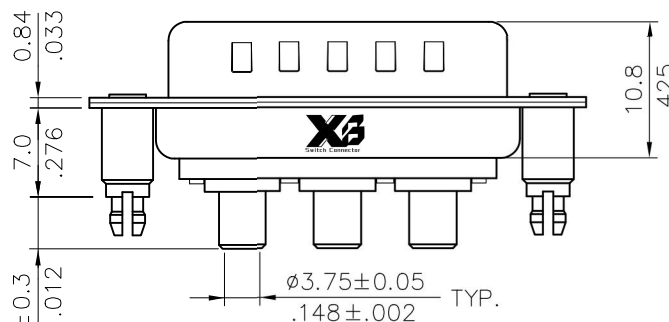


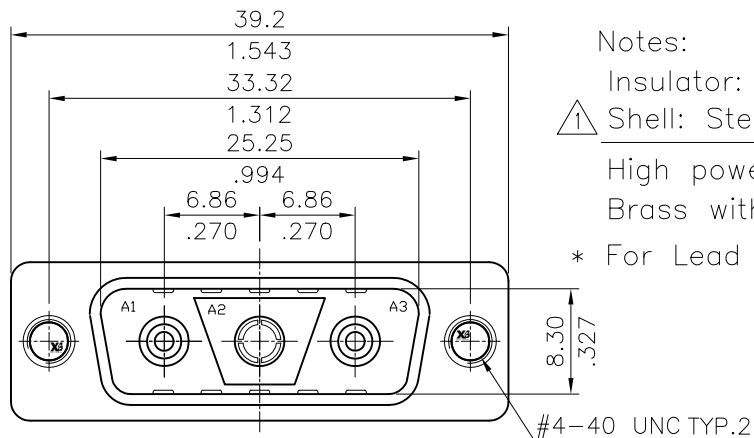

Recommended P.C Board Layout

Notes:

Insulator: Glass filled Polyester UL 94V-0

⚠ Shell: Steel, Nickel plated as standard

High power Contact :

Brass with Gold plated

* For Lead Free Wave Flow Process

Ordering Code





3W3C P P V 3 0 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug (2 Male + 1 Female Contacts)
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40=40A
- ⑨ Mounting Style:
000= With Ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell (standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		DIM. L= 7.0mm 	

④					DATE	UNIT: mm / inch		TITLE: 3W3C 40A HIGH POWER D-SUB CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
③				DRAWN BY: Karen	1/17-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
②				ENGINEER: Sun	1/23-18'			MATERIAL:	
①	Karen	1/17-18'	ECNT117262/ECRT117074	CHECKED BY: Eisley	1/25-18'	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	1/25-18'		.X ± 0.30/.012	X' ± 1'	DRAWING NO. 3W3C18SB
						.XX ± 0.20/.008	X' ±	SCALE 2 / 1	SHEET 1 OF 1
						.XXX ± 0.10/.004	XX' ±		