


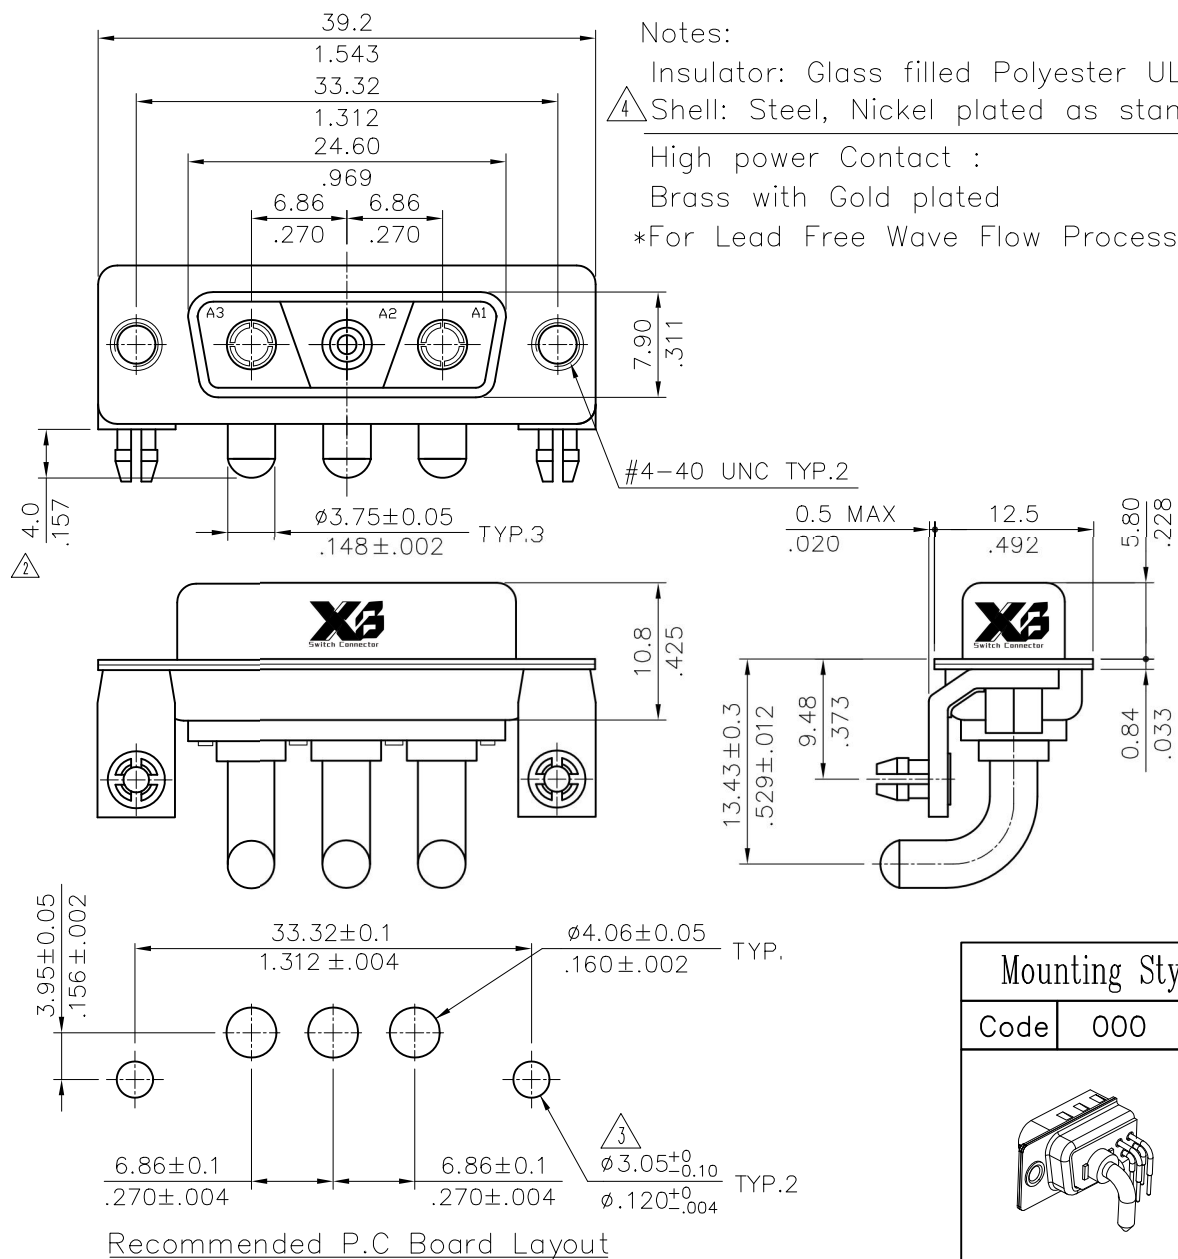

Ordering Code

3W3C S P H 3 0 1 40 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type:
S= Receptacle (2 Female + 1 Male Contacts)
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Lead Free Process

RoHS Compliant

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10

△4	Karen	1/17-18'	ECNT117262/ECRT117074		DATE	UNIT: mm / inch	TITLE: 3W3C 40A HIGH POWER D-SUB CONNECTOR(RIGHT ANGLE BOARD MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		DRAWING NO. 3W3C22SE PART NO. 3W3CSPH*0*40***	
△3	Karen	4/07-17'	ECNT117049/ECRT117003	DRAWN BY:	Karen	1/17-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△2	Jim	10/13/06'	ECR06094-0/ECN06369	ENGINEER:	Sun	1/23-18'	.X ± 0.30/.012 X' ± .1'	MATERIAL:		SCALE 2 / 1	
△1	SUN	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	Eisley	1/25-18'	.XX ± 0.20/.008 X' ± .1'				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/25-18'	.XXX ± 0.10/.004 X' ± .1'	FINISH:		SHEET 1 OF 1	