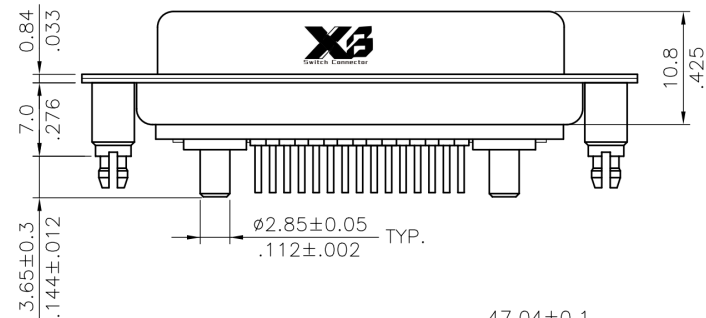
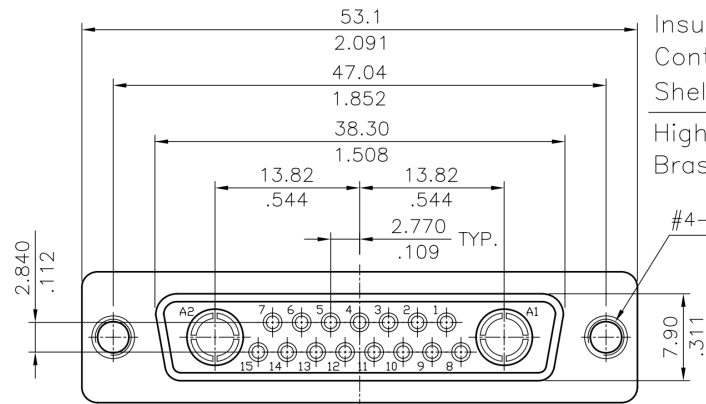


Recommended P.C Board Layout

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact :

Brass with Gold plated

#4-40 UNC TYP.2

Ordering Code

17W2 S P V 3 2 1 20 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High Power contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 20= 20A

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4						DATE	UNIT: mm / inch	TITLE: 17W2 20A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
3					DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
2					ENGINEER:	David	10/19-01'	.X ± 0.30/.012 .X' ± 1'	
1					CHECKED BY:	David	10/19-01'	.XX ± 0.20/.008 .X' ±	
								.XXX ± 0.10/.004 .X' ±	
SYM	NAME	DATE		REVISIONS	APPROVED BY:	Alex	10/19-01'	FINISH:	DRAWING NO. 17W208SB PART NO. 17W2SPV***20*00 SCALE 2 / 1 SHEET 1 OF 1