

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

21W4 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Selective Gold flash plated over Nickel

B= Selective 15 μ " Gold plated over Nickel

C= Selective 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green




⑥ Mounting Style:

000= With $\phi 3.05$ mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

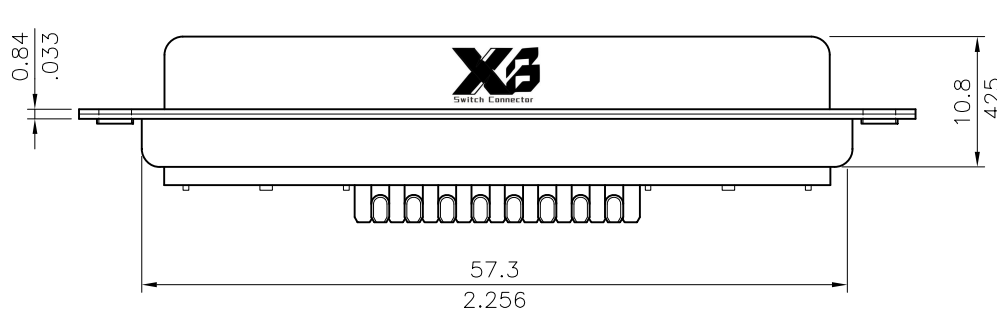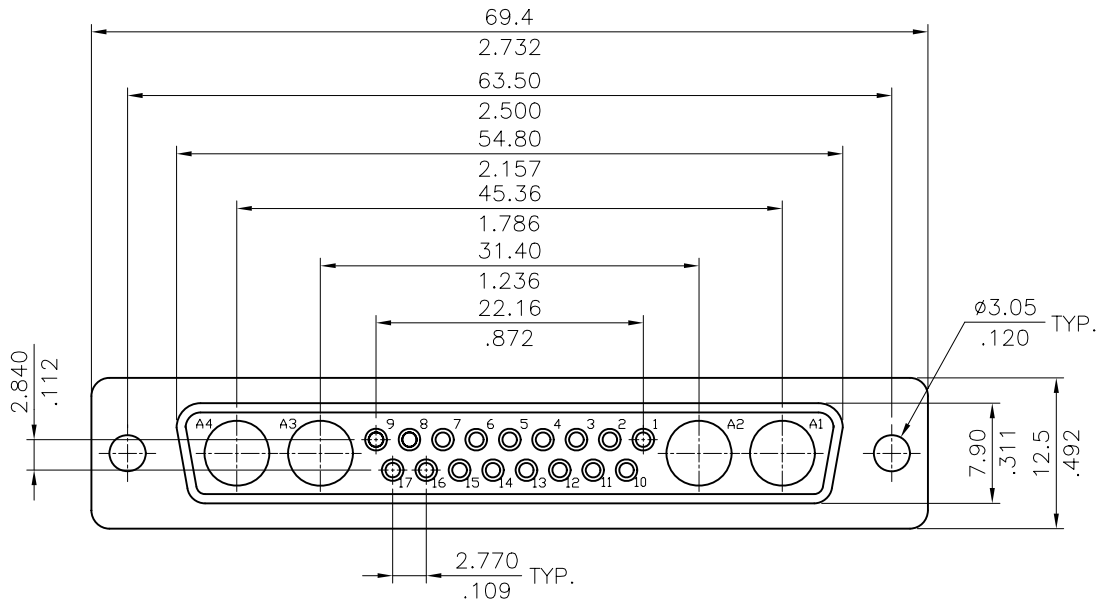

Mounting Style

Code	000	Code	A00	Code	B00	Code	C00
	DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 21W4 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
3				DRAWN BY:	James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER:	David	11/19-02'	.X $\pm 0.30/.012$ X' $\pm$ 1'		
1				CHECKED BY:	David	11/19-02'	.XX $\pm 0.20/.008$ X' $\pm$		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/19-02'	.XXX $\pm 0.10/.004$ XX' $\pm$	FINISH:	
DRAWING NO.		21W402SC		PART NO.		21W4S0S0**00*00		SCALE	2 / 1
SHEET		1		OF		1			