

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

25W3 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Selective Gold flash plated over Nickel

B= Selective 15 μ " Gold plated over Nickel

C= Selective 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green

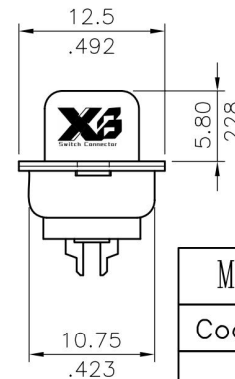
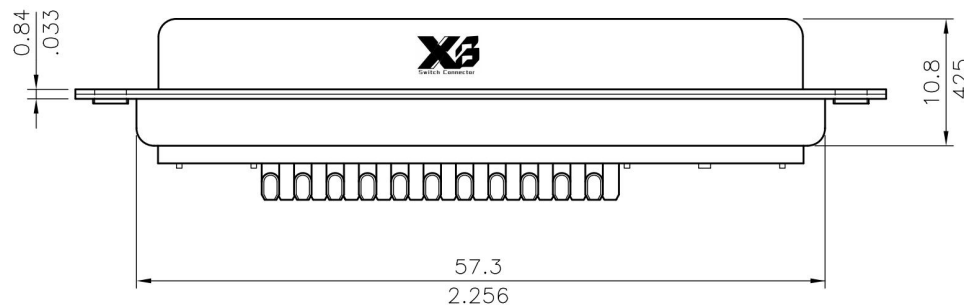
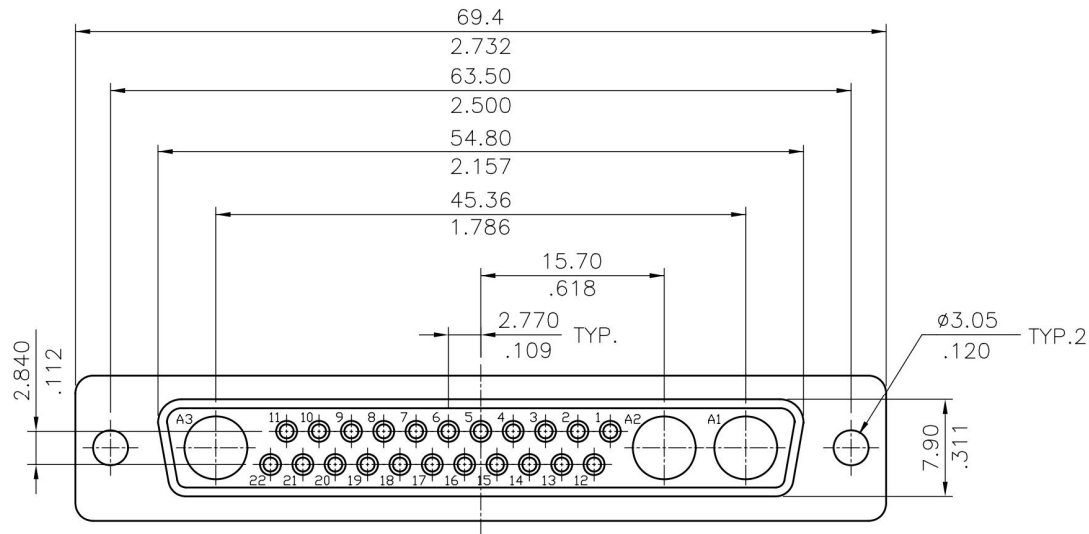
⑥ Mounting Style:

000= With $\varnothing 3.05$ mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell





B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell



Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm
							

4					DATE	UNIT: mm / inch	TITLE: 25W3 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER: David	11/18-02'	.X $\pm 0.30/012$.X' ± 1	FINISH:	DRAWING NO. 25W302SC	PART NO. 25W3S0S0**00*00	SHEET 1 OF 1	
1				CHECKED BY: David	11/18-02'	.XX $\pm 0.20/008$.X' $\pm$		SCALE 2 / 1			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/18-02'	.XXX $\pm 0.10/004$.XX $\pm$					