


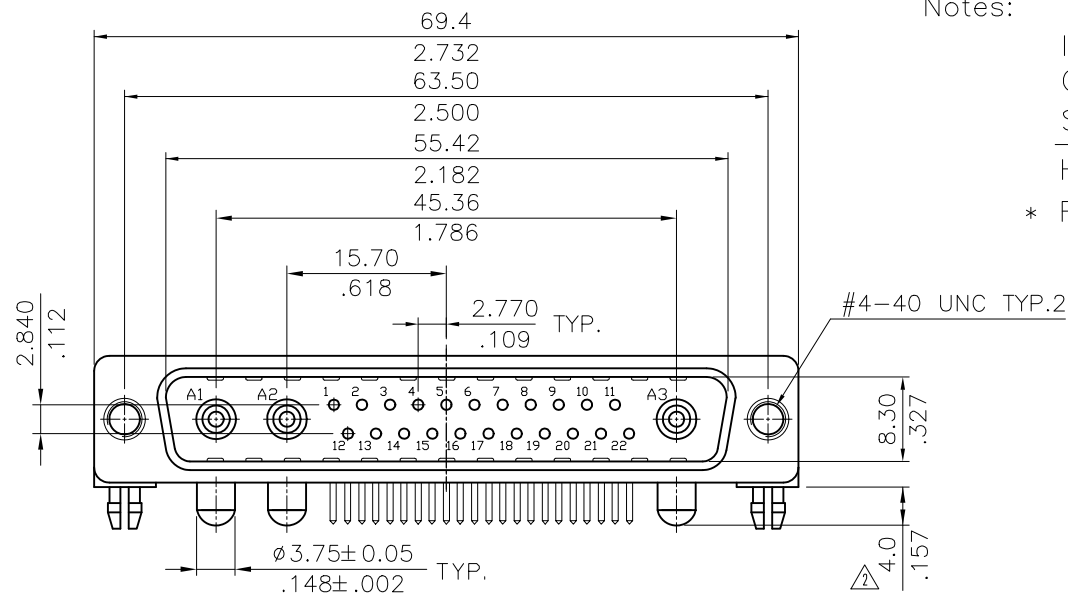

Notes:



Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

\* For Lead Free Wave Flow Process

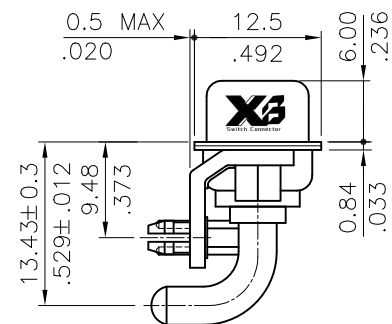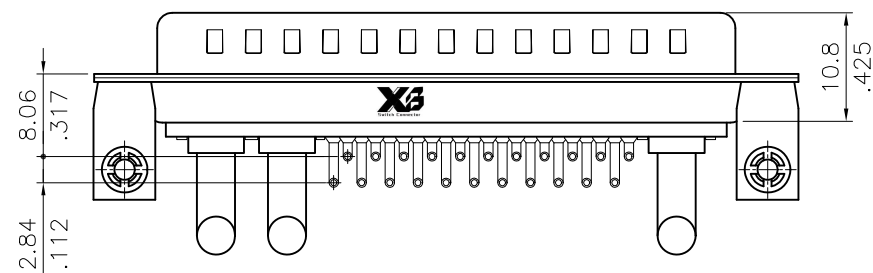

Lead Free Process

RoHS Compliant

|              |       |           |                       |              |        |          |                                         |         |                                                                          |                                                                                                                               |          |          |                 |
|--------------|-------|-----------|-----------------------|--------------|--------|----------|-----------------------------------------|---------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|-----------------|
| <div>4</div> |       |           |                       |              |        | DATE     | UNIT: mm / inch                         |         | TITLE: 25W3 40A HIGH POWER MALE<br>D-SUB CONNECTOR (RIGHT<br>ANGLE TYPE) | <div><div>X3</div><div>Switch Connector</div></div> <div>东莞市溪榜电子有限公司</div> <div>DONG GUAN XI BANG ELECTRONICS CO., LTD.</div> |          |          |                 |
| <div>3</div> | Karen | 4/18-17'  | ECNT117049/ECRT117003 | DRAWN BY:    | Karen  | 4/20-17' | TOLERANCE<br>UNLESS OTHERWISE SPECIFIED |         |                                                                          |                                                                                                                               |          |          |                 |
| <div>2</div> | Jim   | 10/13/06' | ECR06094-0/ECN06369   | ENGINEER:    | Sun    | 4/21-17' | .X ± 0.30/.012                          | X' ± 1" | MATERIAL:                                                                |                                                                                                                               |          |          |                 |
| <div>1</div> | SUN   | 3/24/05'  | ECR05025-0/ECN05095   | CHECKED BY:  | Eisley | 4/21-17' | .XX ± 0.20/.008                         | X' ±    |                                                                          |                                                                                                                               | FINISH:  |          |                 |
| SYM          | NAME  | DATE      | REVISIONS             | APPROVED BY: | Eisley | 4/21-17' | .XXX ± 0.10/.004                        | .XX' ±  |                                                                          |                                                                                                                               |          |          |                 |
|              |       |           |                       |              |        |          |                                         |         |                                                                          | DRAWING NO.                                                                                                                   | 25W313SE | PART NO. | 25W3PPH***40*** |
|              |       |           |                       |              |        |          |                                         |         |                                                                          | SCALE                                                                                                                         | 2 / 1    | SHEET    | 1 OF 2          |

