

Notes:



Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

* For Lead Free Wave Flow Process

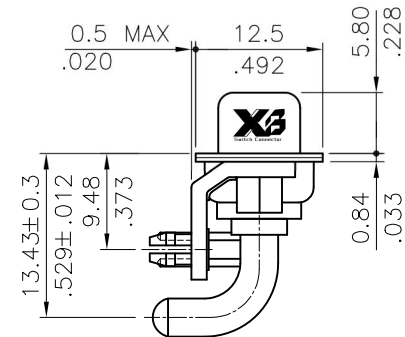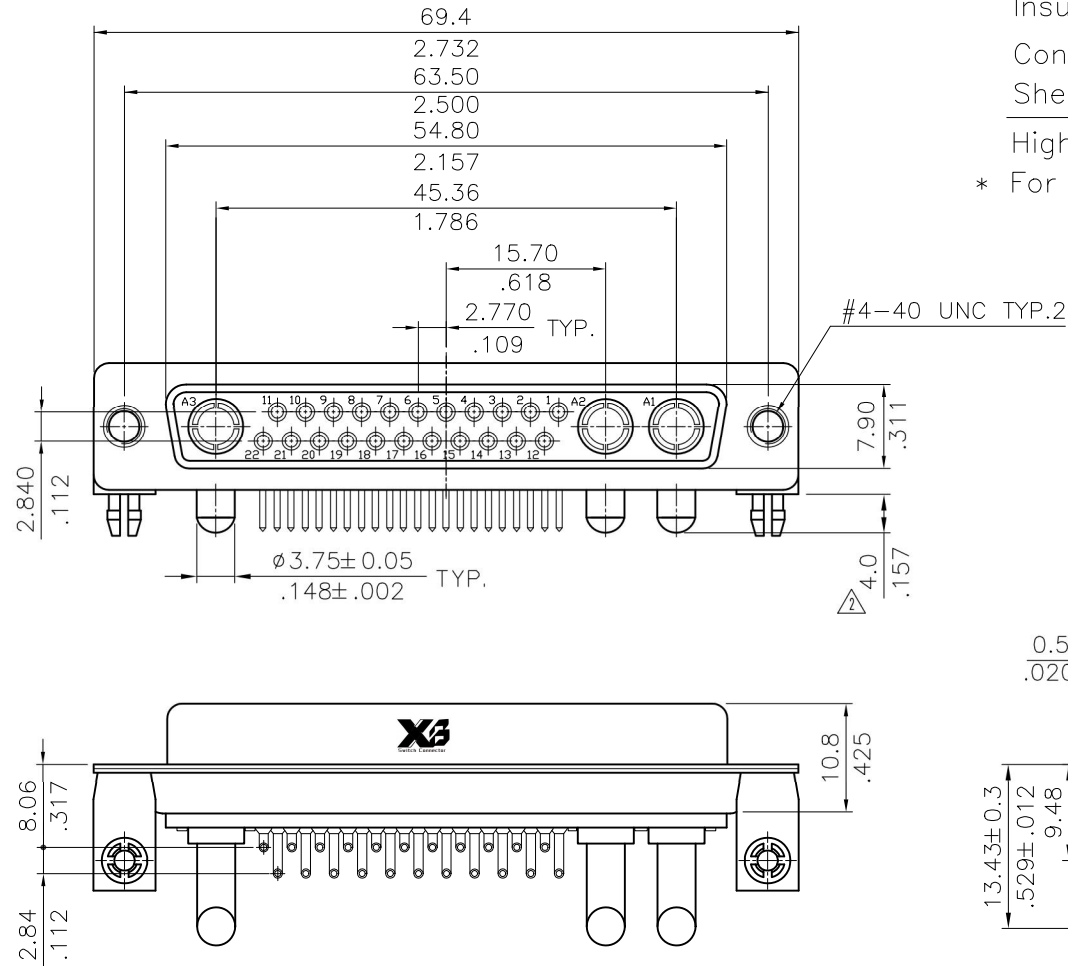

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 25W3 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3	Karen	4/18-17'	ECNT117049/ECRT117003	DRAWN BY:	Karen	4/20-17'		
2	Jim	10/13/06	ECR06094-0/ECN06369	ENGINEER:	Sun	4/21-17'	MATERIAL:	DRAWING NO. 25W314SE
1	SUN	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	Eisley	4/21-17'		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/21-17'	FINISH:	PART NO. 25W3SPH***40***
							SCALE 2 / 1	
							SHEET 1 OF 2	

Ordering Code

25W3 S P H 3 2 1 40 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Connector Type: S= Receptacle
③ Contact type: P= High Power Contact
④ Contact tail style: H= Right Angle Dip type
⑤ High power contact plating:

2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green


- ⑧ Performance: 40= 40A

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Lead Free Process

RoHS Compliant

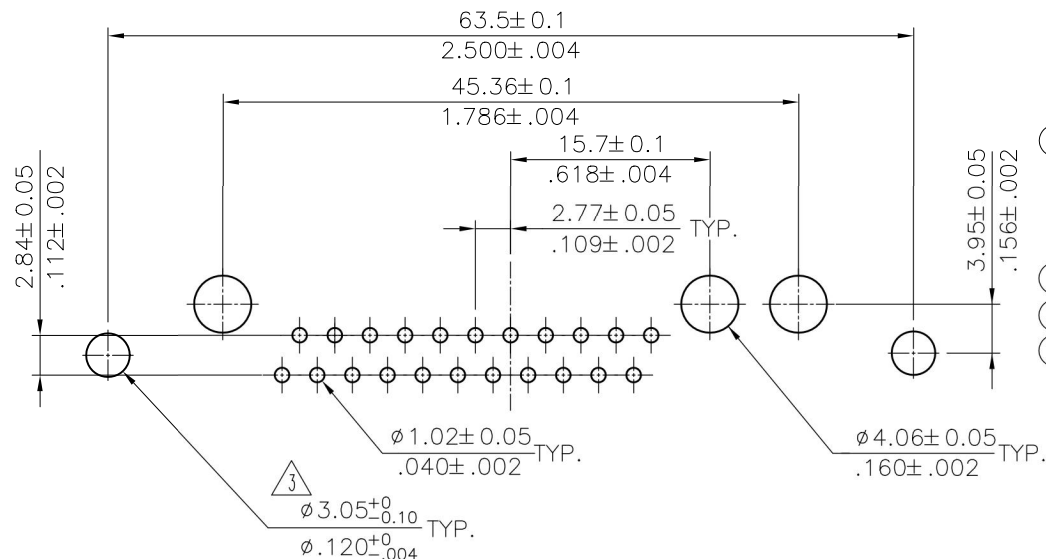

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm 		DIM. L= 4.0mm 		øA=3.2mm 		

4					DATE	UNIT: mm / inch		TITLE: 25W3 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3	Karen	4/18-17'	ECNT117049/ECRT117003	DRAWN BY:	Karen	4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Jim	10/13/06'	ECR06094-0/ECN06369	ENGINEER:	Sun	4/21-17'	.X ± 0.30/.012			X' ± 1'		
1	SUN	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	Eisley	4/21-17'	.XX ± 0.20/.008			X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/21-17'	.XXX ± 0.10/.004	XX' ±	MATERIAL:			
									FINISH:			
									DRAWING NO.	25W314SE	PART NO.	25W3SPH***40**
									SCALE	2 / 1	SHEET	2 OF 2