

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code

36W4 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15μ" Gold plated over Nickel

C= Seletive 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green




⑥ Mounting Style:

000= With ø3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

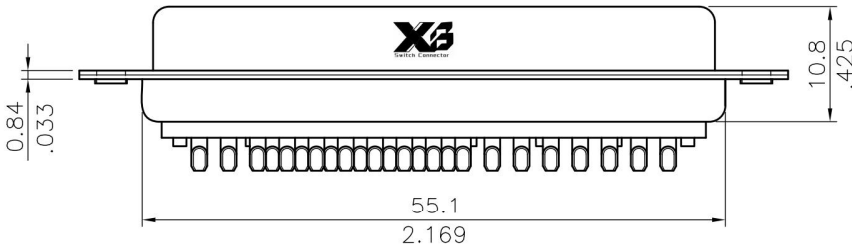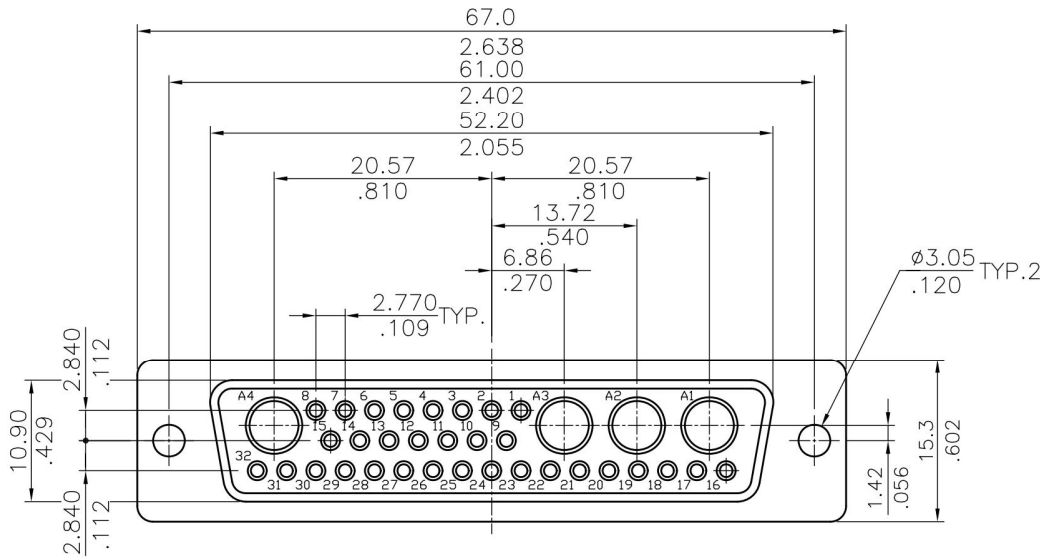

Mounting Style

Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 36W4 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY: James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER: David	11/18-02'	X ±0.30/.012 X' ± 1'	MATERIAL:		DRAWING NO. 36W402SC	PART NO. 36W4S0S0**00*00
1				CHECKED BY: David	11/18-02'	.XX ±0.20/.008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/18-02'	.XXX ±0.10/.004 .XX' ±	FINISH:		SCALE	2 / 1
								SHEET 1 OF 1		