

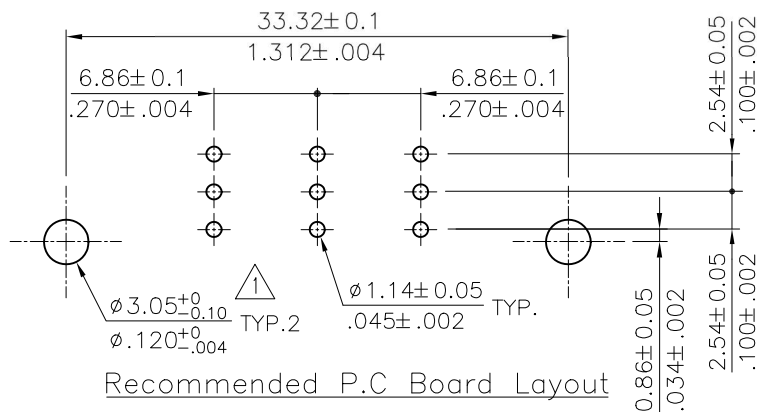
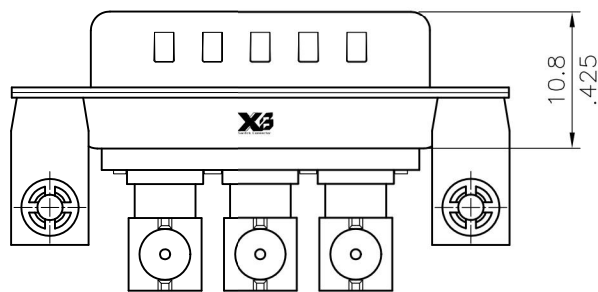


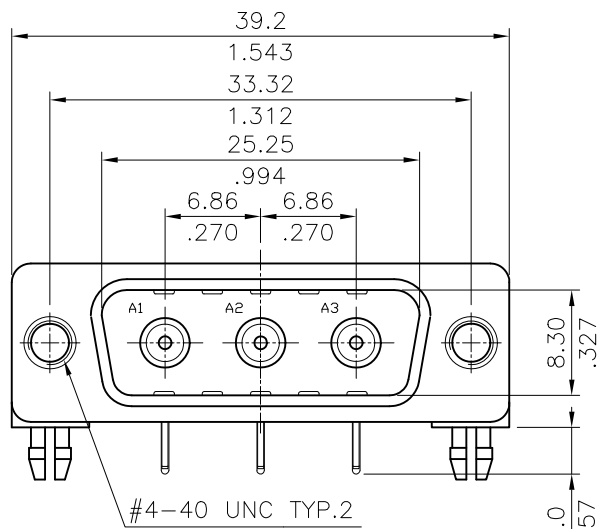

Notes:

- * Insulator: Glass filled Polyester UL 94V-0
- * Shell: Steel, Tin plated as standard
- * Coaxial terminal
Insulator: Teflon UL 94V-0
Color white
Contact: Brass with Gold plated
- * For Lead Free Wave Flow Process

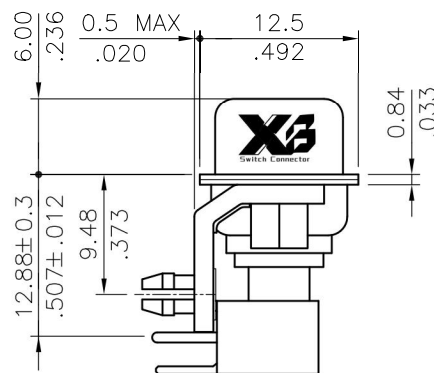

Ordering Code

C3W3 P C H 3 0 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With Ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with Ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks (standard)

Lead Free Process

RoHS Compliant

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm 		DIM. L= 4.0mm 		ØA=3.2mm 		

4					DATE	UNIT: mm / inch	TITLE: C3W3 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		DRAWING NO. C3W305SC PART NO. C3W3PCH*0****0	
3				DRAWN BY: Karen	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER: Sun	3/20-17'	.X ± 0.30/.012 X' ± .1'	MATERIAL:	SCALE 2 / 1		SHEET 1 OF 1	
1	Karen	3/3-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	3/22-17'	.XX ± 0.20/.008 X' ± .1'	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/22-17'	.XXX ± 0.10/.004 X' ± .1'					