
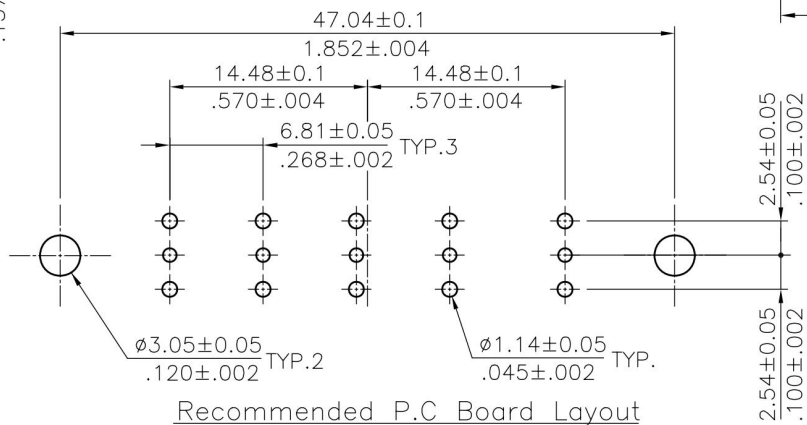
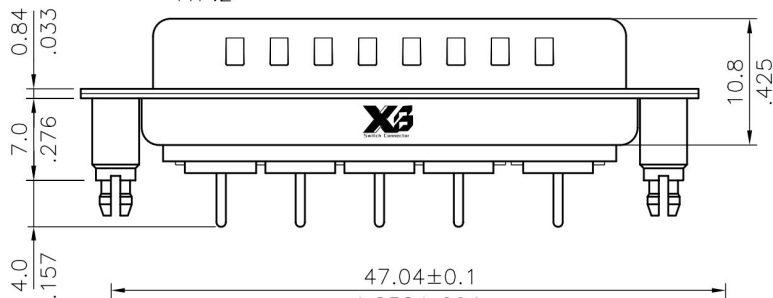


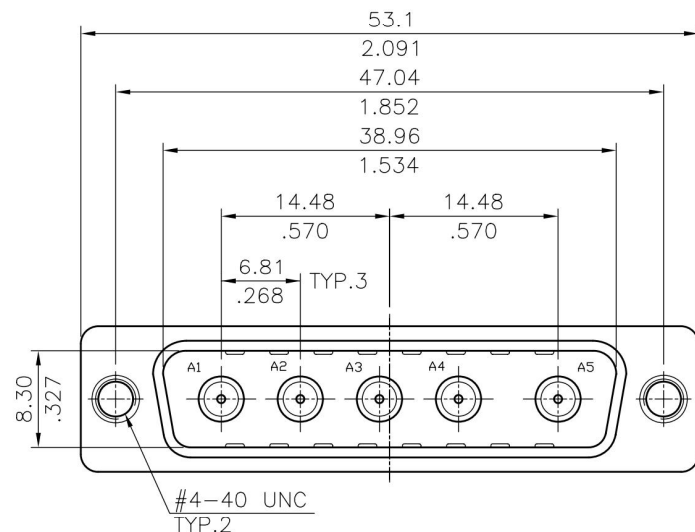

Material:

Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

Ordering Code

C5W5 P C V 3 0 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

Code	000	Code	B00	Code	C00	Code	D00
	DIM. L = 4.0mm		DIM. L = 4.0mm		DIM. L = 4.0mm		DIM. L = 7.0mm

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: C5W5 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3				DRAWN BY:	Eisley	10/09-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	David	10/15-01'	.X ± 0.30/.012	X' ± 1'	MATERIAL:	DRAWING NO. C5W503SB PART NO. C5W5PCV*0****00			
1				CHECKED BY:	David	10/15-01'	.XX ± 0.20/.008	.X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/15-01'	.XXX ± 0.10/.004	.XX' ±	FINISH:	SCALE 2 / 1 SHEET 1 OF 1			