


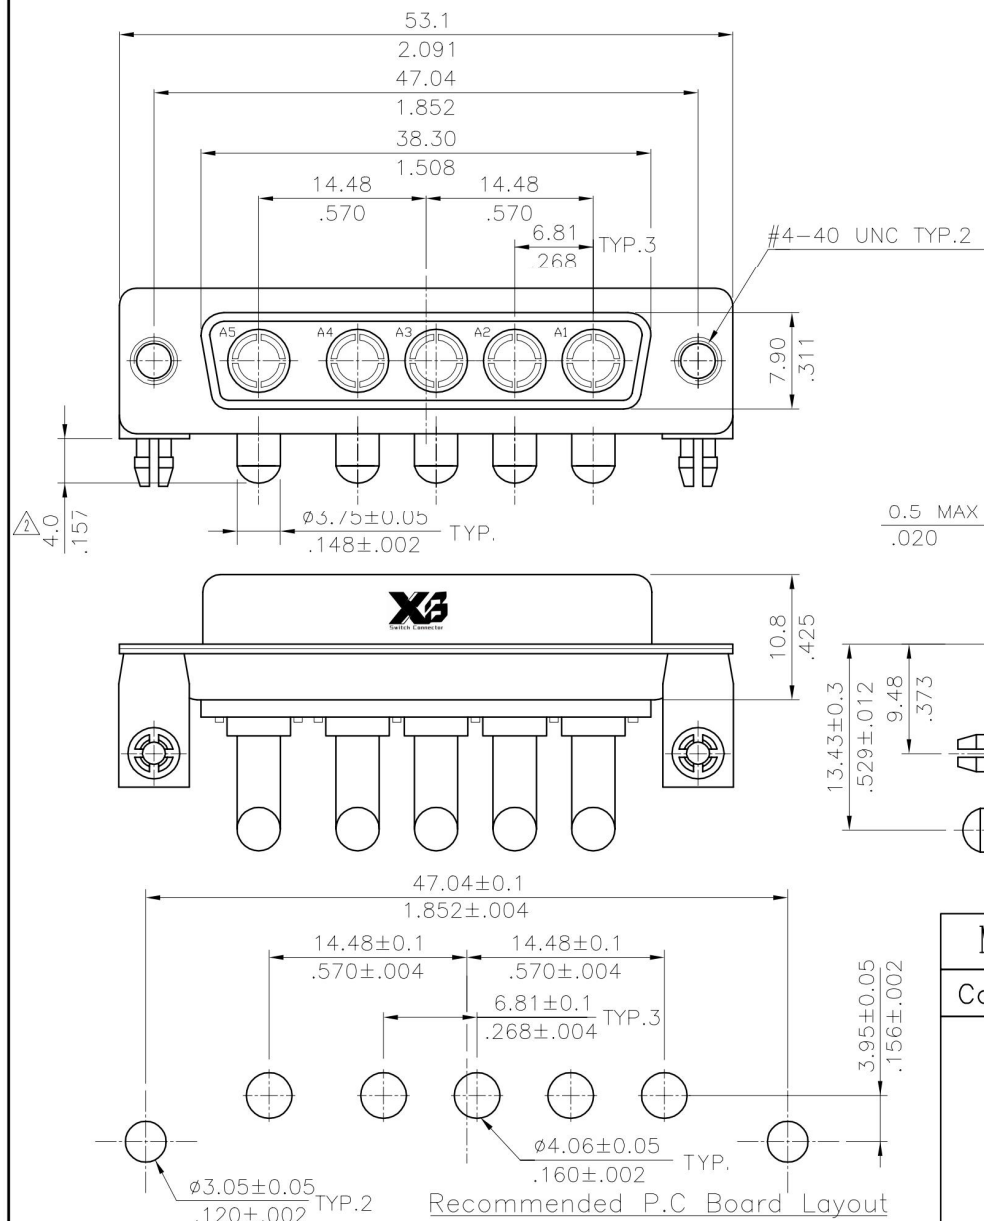

Material: Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

Ordering Code

C5W5 S P H 3 0 1 40 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm		DIM. L= 4.0mm		øA=3.2mm		

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: C5W5 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3					DRAWN BY:	Jim	10/14/ 06'			TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	DRAWING NO.	C5W514SD	PART NO.
2	Jim	10/13/06'	ECR06094-0/ECN06369	ENGINEER:	Eisley	10/17/ 06'	.X ± 0.30/.012	X' ± 1'		FINISH:				
1	SUN	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	David	10/17/ 06'	.XX ± 0.20/.008	.X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/17/ 06'	.XXX ± 0.10/.004	.XX' ±						