


Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

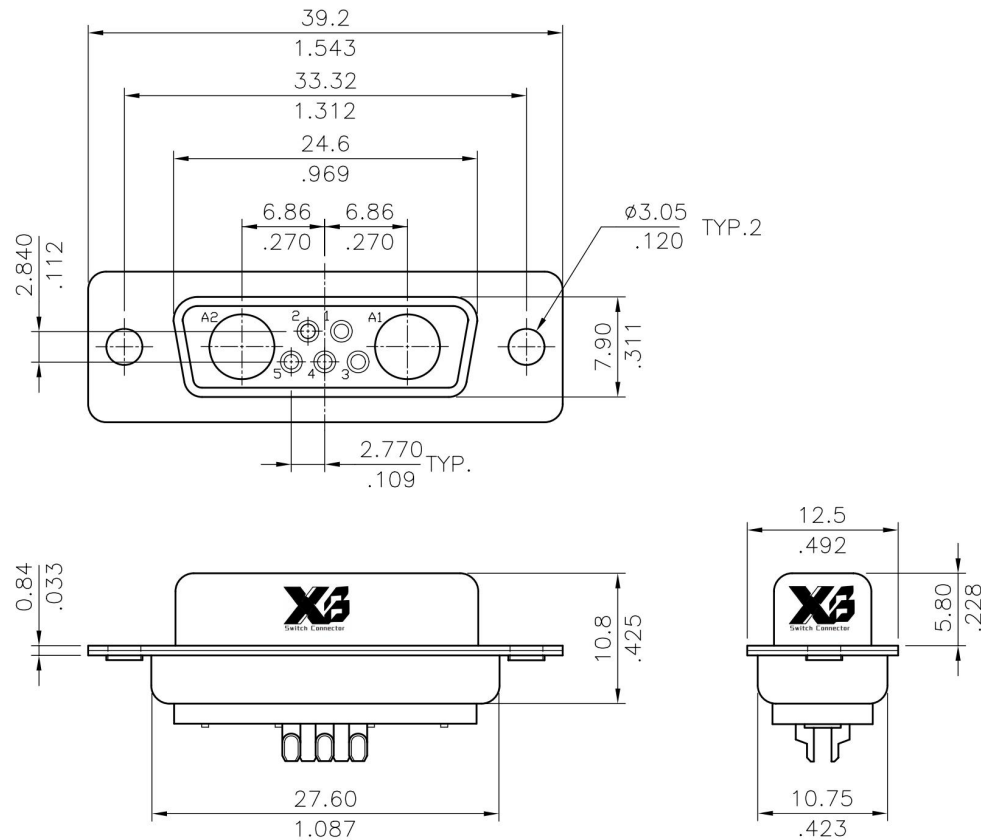

Ordering Code

C7W2 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Connector Type:
S0= Receptacle
③ Contact tail style:
S0= Solder Cup type
④ Singal Contact Plating:
A= Seletive Gold flash plated over Nickel
B= Seletive 15 μ ” Gold plated over Nickel
C= Seletive 30 μ ” Gold plated over Nickel
⑤ Insulator Color:
100= Black
600= Green
⑥ Mounting Style:
000= With ϕ 3.05mm holes on shell(Standard)
A00= Riveted #4-40 UNC close nuts on front shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4					DATE	UNIT: mm / inch	TITLE: C7W2 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Eisley	10/09-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER:	David	10/15-01'	.X $\pm$ 0.30/.012 X' $\pm$ 1'	DRAWING NO. C7W202SB PART NO. C7W2S0S0**00*00			
1				CHECKED BY:	David	10/15-01'	.XX $\pm$ 0.20/.008 .X' $\pm$				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/15-01'	.XXX $\pm$ 0.10/.004 .XX' $\pm$	FINISH:	SCALE	2 / 1	SHEET 1 OF 1